

# Two-dimensional face image classification for distinguishing children from adults based on anthropometry

---

Grd, Petra

Doctoral thesis / Disertacija

2015

Degree Grantor / Ustanova koja je dodijelila akademski / stručni stupanj: **University of Zagreb, Faculty of Organization and Informatics Varaždin / Sveučilište u Zagrebu, Fakultet organizacije i informatike Varaždin**

Permanent link / Trajna poveznica: <https://urn.nsk.hr/urn:nbn:hr:211:517258>

Rights / Prava: [In copyright](#) / [Zaštićeno autorskim pravom](#).

Download date / Datum preuzimanja: **2024-07-17**



Repository / Repozitorij:

[Faculty of Organization and Informatics - Digital Repository](#)





University of Zagreb

Faculty of Organization and Informatics

Petra Grd

**TWO-DIMENSIONAL FACE IMAGE  
CLASSIFICATION FOR DISTINGUISHING  
CHILDREN FROM ADULTS BASED ON  
ANTHROPOMETRY**

DOCTORAL THESIS

Varaždin, 2015.

# DOCTORAL THESIS INFORMATION

## I. AUTHOR

Name and surname	Petra Grd
Place and date of birth	Kutina, February 14 <sup>th</sup> 1986
Faculty name and graduation date for level VII/I	Faculty of Organization and Informatics, June 8 <sup>th</sup> 2009
Faculty name and graduation date VII/II	
Current employment	University of Zagreb, Faculty of Organization and Informatics, Varaždin

## II. DOCTORAL THESIS

Title	Two-dimensional face image classification for distinguishing children from adults based on anthropometry
Number of pages, figures, tables, appendixes, bibliographic information	151 pages, 23 figures, 39 tables, 3 appendixes and 131 bibliographic information
Scientific area and field in which the title has been awarded	Social Sciences, Information and Communication Sciences
Mentors	Full Professor Miroslav Bača, PhD
Faculty where the thesis was defended	Faculty of Organization and Informatics, Varaždin
Mark and ordinal number	

## III. GRADE AND DEFENSE

Date of doctoral thesis topic acceptance	November 25 <sup>th</sup> 2014
Date of doctoral thesis submission	April 21 <sup>st</sup> 2015
Date of doctoral thesis positive grade	May 26 <sup>th</sup> 2015
Grading committee members	Assistant Professor Markus Schatten, PhD Full Professor Miroslav Bača, PhD Associate Professor Arun Ross, PhD Associate Professor Kornelije Rabuzin, PhD Assistant Professor Sandro Gerić, PhD
Date of doctoral thesis defense	June 16 <sup>th</sup> 2015
Defense committee members	Assistant Professor Markus Schatten, PhD Full Professor Miroslav Bača, PhD Associate Professor Arun Ross, PhD Associate Professor Kornelije Rabuzin, PhD Assistant Professor Sandro Gerić, PhD
Date of promotion	



University of Zagreb

Faculty of Organization and Informatics

PETRA GRD

**TWO-DIMENSIONAL FACE IMAGE  
CLASSIFICATION FOR DISTINGUISHING  
CHILDREN FROM ADULTS BASED ON  
ANTHROPOMETRY**

DOCTORAL THESIS

Thesis adviser: Full Professor Bača Miroslav, PhD

Varaždin, 2015.



Sveučilište u Zagrebu

Fakultet organizacije i informatike

Petra Grd

**KLASIFIKACIJA DVODIMENZIONALNIH  
SLIKA LICA ZA RAZLIKOVANJE DJECE  
OD ODRASLIH OSOBA NA TEMELJU  
ANTROPOMETRIJE**

DOKTORSKA DISERTACIJA

Varaždin, 2015.

## **ABSTRACT**

Classification of face images can be done in various ways. This research uses two-dimensional photographs of people's faces to detect children in images. Algorithm for classification of images into children and adults is developed and existing algorithms are analysed. This algorithm will also be used for age estimation. Through analysis of the state of the art research on facial landmarks for age estimation and combination with changes that occur in human face morphology during growth and aging, facial landmarks needed for age classification and estimation of humans are identified. Algorithm is based on ratios of Euclidean distances between those landmarks. Based on these ratios, children can be detected and age can be estimated.

**Keywords:** Biometrics, face aging, anthropometric ratios, craniofacial morphology, face changes

## **SAŽETAK**

Slike lica mogu biti klasificirane na različite načine. Ovo istraživanje koristi dvodimenzionalne fotografije ljudskih lica za detekciju djece na slikama. Kreiran je novi algoritam za klasifikaciju fotografija ljudskih lica u dvije grupe, djeca i odrasli. Algoritam će se također koristiti za procjenu dobi osoba na slici te će biti analizirani postojeći algoritmi. Kroz analizu literature o karakterističnim točkama korištenih u procjeni dobi i kombinacijom dobivenih karakterističnih točaka s morfološkim promjenama tokom odrastanja i starenja, definirane su karakteristične točke potrebne za klasifikaciju i procjenu dobi. Algoritam se bazira na omjerima Euklidskih udaljenosti između identificiranih karakterističnih točaka.

**Ključne riječi:** Biometrija, starenje lica, antropometrijski omjeri, kraniofacijalna morfologija, promjene na licu

# Contents

Contents .....	I
List of Figures.....	III
List of Tables .....	IV
List of Abbreviations .....	VI
List of Appendixes .....	X
Chapter 1: Introduction.....	1
1.1. Objective and Hypotheses .....	3
1.2. Methodology.....	4
1.3. Ethical Aspects .....	7
Chapter 2: Literature Review .....	8
2.1. Aging Face.....	25
2.2. Types of Age.....	28
2.3. Face Representation Models .....	29
2.3.1. Anthropometric Model .....	29
2.3.2. Active Appearance Model.....	31
2.3.3. Aging Pattern Subspace.....	32
2.3.4. Age Manifold.....	33
2.3.5. Biologically-Inspired Models .....	33
2.3.6. Discussion.....	34
2.4. Aging Function Learning Methods.....	35
2.4.1. Classification .....	35
2.4.2. Regression .....	36
2.4.3. Hybrid.....	37

Chapter 3: New Algorithm for Age Classification .....	38
3.1. Face Representation .....	38
3.1.1. Facial Landmarks .....	39
3.1.2. Ratios .....	47
3.2. Classification .....	52
Chapter 4: Experimental Results .....	55
4.1. Datasets.....	55
4.1.1. Public Databases.....	55
4.1.2. Private Database .....	58
4.2. Performance Measurement .....	62
4.2.1. Age Classification .....	62
4.2.2. Age Estimation .....	67
4.3. Comparison with State of the Art Algorithms .....	76
Chapter 5: Application .....	82
Chapter 6: Conclusion .....	84
Bibliography .....	87
APPENDIX A New algorithm results for Fg-net database .....	101
APPENDIX B Anthropometric model results for Fg-net database .....	114
APPENDIX C New algorithm results for Private database.....	124
Curriculum Vitae .....	133
List of Publications.....	134



# List of Figures

Figure 2.1. Head shape changes caused by craniofacial growth (Geng, Yun and Smith-Miles, 2010).....	26
Figure 2.2. Craniofacial changes during growth and aging from Fg-net database (Fg-net, 2014).....	27
Figure 2.3. Anthropometric ratio 1 on human face (Kwon and Lobo, 1999).....	30
Figure 2.4. Anthropometric ratio 2 on human face (Kwon and Lobo, 1999).....	30
Figure 2.5. Anthropometric ratio 3 on human face (Kwon and Lobo, 1999).....	30
Figure 2.6. Anthropometric ratio 4 on human face (Kwon and Lobo, 1999).....	30
Figure 2.7. Anthropometric ratio 5 on human face (Kwon and Lobo, 1999).....	31
Figure 2.8. Anthropometric ratio 6 on human face (Kwon and Lobo, 1999).....	31
Figure 2.9. Classification of aging function learning methods.....	35
Figure 3.1. Block diagram of the new algorithm.....	38
Figure 3.2. Landmark points as identified by Kleinberg and Siebert (2012) .....	39
Figure 3.3. Landmark points as identified by Takimoto et al. (2007).....	40
Figure 3.4. Landmark points as identified by Txia and Huang (2009) .....	40
Figure 3.5. Landmark points as identified by Ramanathan and Chellapa (2006) .....	41
Figure 3.6. Landmark points as identified by Kostinger et al. (2011).....	41
Figure 3.7. Landmark points as identified by Izadpanhi and Toygar (2012) .....	42
Figure 3.8. All landmark points as identified in literature .....	43
Figure 3.9. Landmark points used in this research .....	45
Figure 3.10. Correlation between years and ratio $d(MFL,LAML)/d(MFL, MFR)$ .....	50
Figure 3.11. Correlation between years and ratio $d(MFL,PHR)/d(PHL, LAML)$ .....	50
Figure 4.1. Cumulative score curve of the new algorithm tested on the Fg-net database .....	70
Figure 4.2. Comparison of cumulative score curves of the new algorithm and anthropometric model tested on the Fg-net database .....	73
Figure 4.3. Cumulative score curve of the new algorithm tested on the private database .....	75

# List of Tables

2.1. Methods used in state of the art age classification and estimation algorithms.....	18
2.2. State of the art papers by sources .....	23
2.3. State of the art papers by year of publication .....	24
2.4. Face shape changes caused by growth or aging .....	27
2.5. Advantages and disadvantages of face representation models .....	34
3.1. Landmark points identified in literature .....	43
3.2. Landmark points used in this research .....	46
3.3. Spearman coefficients .....	51
3.4. MLP case processing summary .....	53
3.5. MLP information .....	54
3.6. Trained MLP results .....	54
4.1. Face age databases.....	56
4.2. Face age databases by number of papers.....	57
4.3. Subjects and images by sex in Fg-net database.....	57
4.4. Images per person in Fg-net database.....	58
4.5. Images per age in Fg-net database.....	58
4.6. Information collected for the private database .....	60
4.7. Subjects per sex collected for the private database .....	60
4.8. Images per person collected for the private database .....	61
4.9. Images per age collected for the private database .....	61
4.10. Subjects per sex left in the private database after preprocessing .....	62
4.11. Images per age left in the private database after preprocessing .....	62
4.12. General confusion matrix (Lecture Notes, 2015) .....	63
4.13. Confusion matrix for the new algorithm tested on the Fg-net database.....	64
4.14. Classification accuracy of the new algorithm by age tested on the Fg-net database .....	65
4.15. MAE per age results of the new algorithm tested on the Fg-net database .....	68
4.16. MAE per decade results of the new algorithm tested on the Fg-net database.....	69

4.17. CS results of the new algorithm tested on the Fg-net database .....	69
4.18. Face ratios used in anthropometric model .....	70
4.19. Comparison of MAE per age results of the new algorithm and anthropometric model tested on the Fg-net database .....	71
4.20. Comparison of MAE per decade results of the new algorithm and anthropometric model tested on the Fg-net database .....	72
4.21. Comparison of CS results of the new algorithm and anthropometric model tested on the Fg-net database .....	73
4.22. MAE per age results of the new algorithm tested on the private database.....	74
4.23. MAE per decade results of the new algorithm tested on the private database .....	74
4.24. CS results of the new algorithm tested on the private database .....	75
4.25. Current research results for age classification .....	76
4.26. Research results for age classification comparable to this research.....	77
4.27. Current research results for age estimation .....	78
4.28. Comparison of state of the art research results for age estimation with the new algorithm results .....	80

# List of Abbreviations

MAE - Mean Absolute Error  
CS - Cumulative Score  
NN - Neural Network  
AGES - Agging Pattern Subspace  
CDLPP - Class Distance Weighted Locality Preserving Projection  
PCA - Principal Component Analysis  
LPP - Locality Preserving Projection  
HMM - Hidden Markov Model  
PFA - Probabilistic Fusion Approach  
SVR - Support Vector Regression  
SVM - Support Vector Machines  
ICA - Independent Component Analysis  
AAM - Active Appearance Model  
LAR - Least Angle Regression  
LDA - Linear Discriminant Analysis  
LTP - Local Ternary Patterns  
MTWGP - Multi-Task Warped Gaussian Process  
EBIF - Enhanced Biologically Inspired Features  
BIF - Biologically Inspired Features  
ASM - Active Shape Model  
RBF - Radial Basis Function  
HOG - Histogram of Oriented Gradients  
CCA - Canonical Correlation Analysis  
MPCA - Multilinear Principal Component Analysis  
OHRANK - Ordinal Hyperplane Ranking  
NMF - Non-negative Matrix Factorization  
SFM - Supervised Facial Model  
PLS-R - Partial Least Squares Regression  
CAM - Contourlet Appearance Model

NSCT - Nonsubsampled Contourlet Transform  
GLOH - Gradient Location and Orientation Histogram  
MTL - Multi-task Learning  
DCT - Discrete Cosine Transform  
OLS-R - Orthogonal Least Square Regression  
MFA - Multilinear Subspace Analysis  
MFOR - Multi-feature Ordinal Ranking  
SRC - Sparse Representation-based Classification  
DFT - Discrete Fourier Transform  
GP - Gaussian Process  
TP - T process  
CPNN - Conditional Probability Neural Network  
ART - Adaptive Resonance Network  
KDE - Kernel Density Estimate  
LAG - Lie Algebrized Gaussians  
GMM - Gaussian Mixture Models  
ACM - Active Contour Model  
MLP - Multilayer Perceptron  
kNN - K Nearest Neighbours  
OLPP - Age Manifold  
ALR - Age Group Specific Linear Regression  
SFM - Supervised Facial Model  
ML-SVM - Multi-label Support Vector Machines  
MTSVR - Multi-task Support Vector Regression  
GC - Global Classification  
LCC - Local Classification  
LBPKDE - Local Binary Pattern Kernel Density Estimate  
CM - Craniofacial Morphology  
AM - ANthropometric Model  
EM - Expectation-Maximization  
HH - Highest point of the head  
MFL - Middle point of the forehead (left)

PHL - Most protruded point of the head (left)  
MPL - Midpoint between PHL and LAML  
LAML - Most lateral point at the angle of the mandible (left)  
PMTL - Protrusion of the mental tubercle (left)  
LMLC - Lowest point in the midline on the lower border of the chin  
PMTR - Protrusion of the mental tubercle (right)  
LAMR - Most lateral point at the angle of the mandible (right)  
MLP - Midpoint between LAMR and PHR  
PHR - Most protruded point of the head (right)  
MFR - Middle point of the forehead (right)  
LEBL - Most lateral point of the eyebrow (left)  
HUMEL - Highest point on the upper margin of the midline portion of the eyebrow (left)  
MBHML - Midpoint between HUMEL and MHEL (left)  
MHEL - Medial hinge of the eyebrow (left)  
LEL - Lateral hinge of the eyelid (left)  
HEL - Highest point of the eyelid (left)  
MPEL - Middle point of the eye (left)  
LMLEL - Lowest point in the middle of the margin of the lower eyelid (left)  
MEL - Medial hinge of the eyelid (left)  
LPMEL - Lowest point in the middle of eyesocket (left)  
MNS - Midpoint of the nasofrontal suture  
FMN - Point of the nose where forehead meets the nose  
MHER - Medial hinge of the eyebrow (right)  
MBHMR - Midpoint between HUMER and MHER (right)  
HUMER - Highest point on the upper margin of the midline portion of the eyebrow (right)  
LEBR - Most lateral point of the eyebrow (right)  
LER - Lateral hinge of the eyelid (right)  
HER - Highest point of the eyelid (right)  
MPER - Middle point of the eye (right)  
LMLER - Lowest point in the middle of the margin of lower eyelid (right)

MER - Medial hinge of the eyelid (right)  
LPMER - Lowest point in the middle of eyesocket (right)  
NB - Nose bridge  
MBNP - Midpoint between NB and PNT  
MUNAL - Most upper point of the nasal ala (left)  
MUNAR - Most upper point of the nasal ala (right)  
MNAOL - Medial point of the nasal ala outer margin (left)  
PNT - Most protruded point of the nasal tip  
MNAOR - Medial point of the nasal ala outer margin (right)  
LNAL - Most lateral point of the nasal ala (left)  
LNAR - Most lateral point of the nasal ala (right)  
LNL - Most lateral point of the nose (left)  
LNAIL - Lowest lateral point of the nasal ala inner margin (left)  
INTUL - Most inner point between the nose tip and upper lip  
LNAIR - Lowest lateral point of the nasal ala inner margin (right)  
LNR - Most lateral point of the nose (right)  
HULR - Highest point of the upper lip (right)  
MVUL - The midpoint of the vermilion border of the upper lip  
HULL - Highest point of the upper lip (left)  
LULML - Most lateral point where the upper and the lower lip meet (left)  
MULLM - Midline point where upper and lower lip meet  
LULMR - Most lateral point where the upper and the lower lip meet (right)  
MLLL - Midpoint of the lower margin of the lower lip  
MPLL - Midpoint of the pogonion and lower lip  
AC - Most anterior point of the chin  
ANN - Artificial Neural Network  
ID - Identifier of the subject  
IM\_ID - Image identifier  
IM\_AGE - Age of subject in image  
DOB - Date of birth  
DOA - Date of Acquisition  
ECRM - Electronic Customer Relationship Management

# List of Appendixes

APPENDIX A New Algorithm Results for Fg-net Database

APPENDIX B Anthropometric Model Results for Fg-net Database

APPENDIX C New Algorithm Results for Private Database



# Chapter 1: Introduction

Age estimation and age classification of humans using their face images are a part of a field of biometric. Biometric systems use behavioral and physiological characteristics to recognize individuals. Soft biometric traits like age, gender, ethnicity, height, weight in combination with hard biometric traits can be used to enhance the performance of biometric systems. This research concentrates on age classification and estimation.

Age estimation is an important task in classifying face images. It can be defined as the determination of the age of the person or his/her age group (Scholarpedia, 2013), (Grd, 2013). Human age classification and estimation can be defined in many ways, but this research is concerned with the age estimation and classification based on two-dimensional images of people's faces. Age estimation and classification is done using face anthropometry.

For the purposes of this research definitions of basic terms are given. Age classification is used to classify images in those of children and adults. Children are defined as people from age 0 to 17 and adults are defined as people from age 18 and above. Age estimation in this research is defined as determining the age of a person based on biometric features, more precise on the basis of two-dimensional images of human face (Scholarpedia, 2013). Facial landmarks can be defined as the standard reference points on the face used by scientists to recognize the face, or in this case, predict the age of a person (Face and Emotion, 2013). Anthropometry is the science dealing with measurements of the size, weight, and proportions of the human body (Medical Dictionary, 2015). Therefore, facial anthropometry deals with measurements of the size and proportions of human face.

The aging process affects the structure and appearance of face in many ways. The changes that occur are related to facial morphology, and changes in the face texture. Some characteristics of facial morphology appear only in people of a certain age and change during the aging process (Koruga, Bača and Schatten, 2011). Changes in skin

texture usually occur in adulthood. According to Geng, Fu and Smith-Miles (2010) changes in the face that occur during aging and growth are: chin becomes more prominent, cheeks spread over a larger area, facial characteristics increase and cover the interstitial spaces, head falls backwards, reducing the free space on the surface of the skull, facial hair becomes thicker and changes color, skin color changes, skin becomes thinner, darker, less elastic and more leathery, wrinkles appear, underchin appears, cheeks sag and bags under the eyes appear. Based on all these changes, the age of a person can be determined.

The main motivation of this research is to create an algorithm for classification of humans into minors and adults, for use in detecting illegal content, especially for detection of potential paedophile images. This research will identify the characteristic points of the face necessary to classify face images, it will identify the most appropriate model for age estimation, private database with normalized facial images will be created and a new algorithm for age classification will be developed. Accuracy of the algorithm will be calculated and compared with the accuracy of existing algorithms.

The scientific contribution of this research is as follows:

- Systematization of knowledge on age classification,
- Identification of facial landmarks relevant for age classification and estimation,
- A novel data mining based approach for ratios identification that are important for the age classification and estimation processes
- Creation of a new algorithm for age classification,
- Evaluation of anthropometric model on a large database.

In addition to scientific, this research has a social contribution also. Human age estimation is widely applicable and has great potential: determining the age of immigrants or asylum seekers in situations where there are no documents proving the age of the person, for websites where entrance is allowed only for persons over the age of 18, in order to improve the system for face recognition (most of them are sensitive to changes during aging), searching for missing persons over the years, in human-computer interaction based on age, for the purpose of predicting a persons aging, in the fight against pedophilia (removing images of minors from various portals or personal

computers), etc. These are just some of the possible uses of human age estimation, and with further development of new technologies, there will be more.

The second chapter of the thesis gives a literature review of the field of biometric age estimation and classification. A systematic review of state of the art research is done and an overview of research papers is given. Next, the papers are categorized according to face representations model and aging function learning methods. After that, a description of the most often used face representation models and aging function learning methods, along with their advantages and disadvantages is given. In this chapter, changes on human face during growth and aging are identified. Chapter three describes the new algorithm for age classification and estimation. The algorithm is divided into two parts: face representation and classification. First, facial landmarks needed for ratios calculation are identified. These ratios are used for face representation. After that, the neural network, more accurately a multi layer perceptron, as a classification method is described. Chapter four describes experimental results. This chapter is divided into three parts. First part is a description of databases used for algorithm training and testing. The second part is performance measurement where the hypotheses have been confirmed. The last part of this chapter compares the new algorithm results with existing algorithms. Chapter five describes the possible applications of the algorithm and in conclusion overview of the research, answers to the research questions and confirmed hypotheses are given.

## 1.1. Objective and Hypotheses

The main objective of this research is to develop an algorithm for human age classification and estimation which can classify humans into minors and adults. This new algorithm will be based on the model proposed in this research.

More specific objectives, to be achieved in order to realize the main objective are:

- Identify changes on the face that occur during growth and aging
- Identify facial landmarks necessary for algorithm creation
- Identify ratios needed for the new algorithm

- Create a new age estimation algorithm
- Compare the new algorithm accuracy with the accuracy of existing algorithms

Based on the defined goals, the research questions are set:

### **RESEARCH QUESTION 1**

What changes occur on human face during growth and aging?

### **RESEARCH QUESTION 2**

Which facial landmarks are important for age classification and estimation?

### **RESEARCH QUESTION 3**

Which facial ratios are important for age classification and estimation?

Other than research questions there are two hypothesis:

### **HYPOTHESIS 1**

The newly developed algorithm distinguishes children from adults based on facial anthropometric ratios with an accuracy of more than 80% when used on the publicly available Fg-net database.

### **HYPOTHESIS 2**

Usage of different facial anthropometric ratios than those used in existing anthropometric model, increases the accuracy of the algorithm when used for age estimation.

## **1.2. Methodology**

This research combines both qualitative and quantitative methods, which means that it uses a combined research design. According to Creswell (2008), combined research design is useful when neither qualitative nor quantitative approach separately are not suitable to best understand the research problem, or when the power of qualitative and quantitative research together can offer the best understanding of the problem. More specifically, in this study, it is first necessary to identify changes in human face during growth and aging, then it is necessary to identify facial landmarks needed to describe these changes. Regarding to the applicability of research, this

research is an applied research because it relates to the acquisition of new knowledge for the purpose of finding practical solutions for immediate application (Tkalec Verčič, Sinčić Ćorić and Pološki Vokić, 2010).

The first step of this research will be a review of scientific literature on human age estimation on the basis of two-dimensional images of the face. For this purpose following scientific methods will be used (Kulenović and Slišković, 2015):

- Description is used in the initial phase of this research. It is a simple way of describing facts, objects, processes and connections between them without scientific interpretation
- Compilation is overtaking others' results of scientific research, their observations, opinions and conclusions.
- Analysis is the breakdown of complex thought creations to their simpler component parts and study each part separately and in relation to other parts.
- Synthesis is connecting simple creations to complex thought, linking them together and parts are connected to each other.
- Generalization takes individual observations and draws generalized conclusions.
- Specialization takes a general idea and comes up with a new idea, narrower in scope and richer in content.

This is followed by one of the most important steps, and that is collecting data for the research. This step is divided into two parts. The first part is listing, analysis and acquisition of existing and publicly available databases of face images. The only database publicly available and appropriate for this research is Fg-net (Fg-net, 2014) face database containing 1002 images of 82 different people with marked age. In addition to the aforementioned database private face database will be created. All participants whose photos are collected to create this database are informed about the purpose for which the images will be used, the personal data protection law, the privacy policy on the protection of personal data and they signed the consent for the use of their personal data in this research. Once the images are collected, they have to be normalized, which means that the images need to be reviewed, all images have to be face images, and they have to be larger than the minimum size defined.

The next step is to define the differences in the structure of the human face during growth and aging. Literature on human face changes will be consulted in this step. To this end, the methods of comparison and generalization will be used:

- Comparison is comparing the same or related facts, phenomena, processes or relationships, and establishing their similarities and differences.
- Generalization derives generalized conclusions from observations in the previous step.

After this, it is easy to define changes on human face during growth and aging and facial landmarks relevant for age estimation. The method that will be used for this is abstraction. Abstraction is a thought process that separates irrelevant and highlights important element or traits of specific objects or phenomena research, or in this case, separate the important from the unimportant facial landmarks (Kulenović and Slišković, 2015).

After the previous steps, it is necessary to develop an algorithm for age classification. The basis of the algorithm are ratios on human face. It needs to be determined which face ratios are important. To this end, non-linear correlation will be used. Spearman coefficient will determine the correlation between each ratio and human age. After that, the algorithm needs to be implemented using programming languages (Python). After the implementation of the algorithm, it needs to be tested. There are various algorithms for facial landmark detection, but manual detection is still the most accurate so manually selected facial landmarks will be used as algorithm input. The algorithm gives a class value and age estimate as outputs. To evaluate the classification part of the algorithm confusion matrix will be created and accuracy, precision, recall and specificity will be calculated. Accuracy is the proportion of the total number of predictions that were correct. Precision is the proportion of positive cases that were correctly identified. Recall is the proportion of actual positive cases which are correctly identified. Specificity is the proportion of negative cases that were correctly identified. To evaluate estimation part of the algorithm, the output from the algorithm (estimated age) is compared to real age of a person (chronological age). Measures that are commonly used in literature to evaluate the performance of the age estimation algorithms are Mean Absolute Error (MAE) and Cumulative Score (CS) (Geng, Zhou

and Smith-Miles, 2007), (Guo et al., 2008), (Lanitis, Taylor and Cootes, 2002), (Lanitis, Draganova and Christodoulou, 2004). MAE is defined as the average absolute error between the estimated and chronological age (Guo et al., 2008). CS shows the percentage of cases in the test set where the estimated age error is less than the threshold. Based on the above measures algorithm accuracy will be assessed.

At the end of the research, the analysis and interpretation of results will be done, and conclusions will be given. For this, various tables and diagrams will be used.

### 1.3. Ethical Aspects

In this research, personal data are collected and processed. Collection and processing of such data has to be in accordance with the Croatian Law on Personal Data Protection (Narodne Novine, 2013).

During data collection, respondent was aware of the fact that he/she is giving personal information, aware of the purpose for which the information is collected, and that they can withdraw their data at any time.

Respondent received a Privacy policy for review, which describes the duration of the Privacy policy, all the data collected, the purpose for which the data is collected, and whom to contact in case of any questions. In addition to this policy, all participants signed a statement of consent, with which they give their consent for use of their personal data for this research, and confirm that they received the Privacy policy mentioned earlier. Since this research collects personal data of minors, their parents/guardians gave consent for the use of their data.

## Chapter 2: Literature Review

In order to better position this research, review of existing papers on age estimation algorithms is given.

First algorithm for human age estimation was proposed by Kwon and Lobo (1994). They proposed a theory and practical calculation for the age classification of face images. Their calculations are based on the craniofacial morphology of the person and wrinkle analysis. They distinguish between primary and secondary facial characteristics, and during the implementation of the theory they first use the primary characteristics of the face (eyes, nose, mouth, chin, top of the head and the left and right ends of the head), and then the secondary. From primary characteristic ratios are calculated based on which humans are classified into three classes (children, young adults and older adults). In the analysis of secondary characteristics wrinkle map is used for detection and measurement of wrinkles on the face. By combining the analysis of ratios of the primary characteristics and analysis of facial wrinkles, images are classified in the above mentioned three classes.

Hornig, Lee and Chen (2001) propose a system which classifies humans into four classes: babies, young adults, middle-aged adults and old adults. Facial features are obtained using a Sobel edge operator and two back-propagation neural networks are used to classify images into age groups. The first neural network uses the geometric features to distinguish whether the facial image is a baby. If it is not, then the second network uses the wrinkle features to classify the image into one of three adult groups. The identification rate achieves the accuracy of 90.52% for the training images and 81.58% for the test images.

Lanitis, Draganova and Christodoulou (2004) describe the performance of different classifiers for age estimation. Classifiers used are based on quadratic functions, a shortest distance classifier and neural network based classifier. They were evaluated using single step classification method and hierarchical age estimation approach. According to their results, hierarchical age estimation based on quadratic function and neural networks achieves better age estimation results. The authors also recognize that



for algorithm improvement, fine details of the face need to be taken into consideration for age estimation.

Kalamani and Balasubramanie (2006) apply the fuzzy lattice neural network for age classification of humans into six age groups: tiny tots, blooming buds, brimming youth, midsummer dreamers, steady goers and senior citizens. Nine features are used for this classification, all of them are wrinkle features. The main difference between this approach and the earlier ones is that each image belongs to every group with a certain degree. The resulting group is the one where the image has a maximum degree.

Geng, Zhou and Smith-Miles (2007) presented aging pattern subspace (AGES) method for age estimation. The basic idea is to model the aging pattern, which is defined as a sequence of images sorted chronologically, by constructing a representative subspace. The proper aging pattern for a previously unseen face is determined by the projection in the subspace that can reconstruct the face image with minimal error, while the position of the face image in that aging pattern indicate age.

Another important research is one by Fu, Xu and Huang (2007) who classify existing methods for age estimation into three categories: anthropometric model, aging pattern subspace and age regression. They develop a new framework for age estimation which integrates three modules: face detection, manifold learning and multiple linear regression. Using age manifold a lower-dimensional representation of the image is obtained, and age estimation is defined as the problem of multiple linear regression in the manifold space.

Ueki et al. (2008) compare their Class Distance Weighted Locality Preserving Projection (CDLPP) method for dimensionality reduction for age estimation with most often used methods: Principal Component Analysis (PCA), Locality Preserving Projection (LPP) and Locality Preserving Projection with Local Scaling. The method is based on the extension of LPP method by adding weights to the data with close class labels.

Zhuang et al. (2008) propose using a patch-based Hidden Markov Model (HMM) supervector for face image patches representation. This way, they capture the spatial

structure of human faces and loosen the assumption of identical face patch distribution. Euclidean distance is used as a similarity measurement.

Shen and Ji (2008) propose a geometric feature based age classification system. This system classifies images into two age groups: babies and adults. They also developed an algorithm for eyes, nose and mouth location invariant to pose, background and illumination. The problem with this algorithm is that it uses only one ratio (eye-eye distance and eye-nose distance), and if a subject looks down or up the algorithm is not accurate.

Ben, Su and Wu (2008) use the fact that different facial regions mature at different ages, and use the most significant region for facial age estimation. Their framework consists of two steps: age range prediction and usage of selected region in the predicted age range to make final age estimation.

Guo et al. (2008) say that current age estimation approaches are still not good enough for practical application. In their paper they present age manifold learning scheme for facial aging characteristics extraction, and they design a locally adjusted robust regressor for learning and age estimation. Their approach improves the accuracy with respect to other methods. The same authors (Guo et al., 2008) propose another algorithm for human age estimation based on facial images. The Probabilistic Fusion Approach (PFA) framework fuses a regressor and a classifier. It is derived based on the conditioned Bayes' rule, and by transforming the Support Vector Regression (SVR) and Support Vector Machines (SVM) outputs to probabilities, a serial probabilistic fusion scheme has been developed. This method yields better results than all the previous methods.

Suo et al. (2008) say that the key point in age estimation is defining the feature set essential to age perception. For that reason, they built a hierarchical face model for faces appearing at low, middle and high resolution.

Qi and Zhang (2009) developed an age classification system that automatically separates kid faces from adult faces in real time. The system consists of three steps: face

detection, face normalization and age classification. They use Independent Component Analysis (ICA) to extract local facial features and SVM to train the age classifier.

Geng and Smith-Miles (2009) propose an age estimation method based on multilinear subspace analysis where the aging images are organized in a third-order tensor without pre-assumptions.

Guo et al. (2009) investigated bio-inspired features for facial age estimation. First step is the extraction of biologically inspired features, then feature dimension reduction using PCA and statistical learning for age estimation, and the last step is the estimated age output using SVM.

Ricanek et al. (2009) developed the first multi-ethnic age estimator. They used Active Appearance Model (AAM) to capture aging features, Least Angle Regression (LAR) for dimensionality reduction and SVR for function modeling. The age estimation framework consists of five modules: face detection, face encoding, feature selection using LAR, model fitting using SVR and age estimation.

Long (2009) proposes a new framework where age is predicted based on the learned metric as opposed to Euclidean distance used in most research. Unlike the manifold learning, which is nonlinear, in this framework a full metric is learned and expressed as a linear transformation, which makes it easy to project novel data into it.

Research by Gao and Ai (2009) refers to the use of Gabor filters and fuzzy Linear Discriminant Analysis (LDA) method for the classification of humans in four groups: baby, child, adult and elderly. The paper gives a mathematical basis of belonging to groups.

Luu et al. (2009) present a new technique for age estimation that combines the AAM and SVM to improve the accuracy of age estimation.

Turaga, Biswas and Chellapa (2010) describe the role of geometric attributes on human face, described by a set of facial landmarks for age estimation. They also show that the landmark space can be interpreted as a Grassmann manifold.

Chen et al. (2010) propose age classification of people based on facial image into three groups: children, adults and the elderly. After face detection, face is extracted and 52 characteristic points are located. These characteristic points are used to build the AAM model. Texture characteristics are sent to the SVM to estimate the age group.

Luu et al. (2010) proposed an age estimation technique that combines holistic and local facial features. Holistic features are AAM linear encoding of each face, and local features are extracted using Local Ternary Patterns (LTP). They use these features to classify faces into one of two age groups.

Zhang and Yeung (2010) proposed a multi-task warped Gaussian process (MTWGP) based on a variant of the Gaussian process called warped gaussian process. As authors state, unlike previous age estimation methods which need to specify the form of the regression functions or determine many parameters in the functions, the form of the regression functions in MTWGP is implicitly defined by the kernel function and all its model parameters can be learned from data automatically.

The most accurate algorithm up to date is the Enhanced Bio-Inspired Features (EBIF) by El Dib and El-Saban (2010). They extend the algorithm based on biologically inspired features (BIF) by adding fine detailed facial features, automatic initialization using Active Shape Model (ASM) and analyzing the complete facial area (including forehead).

Zhai, Qing and Ji-Xiang (2010) use improved non-negative matrix factorization algorithm to obtain a linear representation of data under non-negativity constraints. This algorithm avoids the singularity of within-class scatter matrix, and solves the small samples problem of LDA. For age prediction a Radial Basis Function (RBF) neural network has been used.

Duong et al. (2011) propose an advanced approach for age estimation by combining global and local characteristics derived from face images. AAM technique is used to construct the global characteristics of the face, while the local facial characteristics are obtained by Local Binary Patterns (LBP) coding, and SVR is used to train the initial and refined aging function.

Hajizadeh and Ebrahimnezhad (2011) propose a new algorithm to classify people according to age using Histogram of Oriented Gradients (HOG) for description of the face. Their method classifies subjects into four different age groups. The system is divided into three main parts: pre-processing, feature extraction and classification in the age group.

Lu and Tan (2011) proposed a novel method for age estimation by using multiple feature fusion via facial image analysis. They fused shape and texture information of the same image by the Canonical Correlation Analysis (CCA). Multiple linear regression function with a quadratic model was used for age estimation.

Selvi and Vani (2011) developed a system for age estimation of a person in three steps: face detection, extraction of characteristic points and age estimation. In their system age estimation is carried out using Multilinear Principal Component Analysis (MPCA).

Chang, Chen and Hung (2011) propose a new algorithm for age estimation - Ordinal Hyperplane Ranking (OHRank). The algorithm design is based on the relative order of age information. Each ordinal hyperplane separates all the facial images into two groups depending on the relative order and price sensitivity. They convert the age estimation problem into a series of  $K$  subproblems of binary classifications according to the ordering property.

Zhan, Li and Ogunbona (2011) extend the Non-negative Matrix Factorization (NMF) to learn a localized non-overlapping subspace representation for age estimation. One individual extended NMF subspace is learned for each age or age group. The age is estimated based on its reconstruction error after being projected into the learned age subspaces.

Chen et al. (2011) studied age estimation in a multiethnic environment using 39 combinations of four feature normalization methods, two simple feature fusion methods, two feature selection methods and three face representation methods (Gabor, AAM and LBP). The results of the research were that Gabor outperforms AAM and LBP with single face representation.

Nkengne, Tenenhaus and Fertil (2011) used a Supervised Facial Model (SFM) for age estimation. SFM combines shape model and texture model information. These two models are combined using Partial Least Squares Regression (PLS-R) to build the SFM.

Yang et al. (2011) proposed a feature fusion method to estimate the face age via SVR. SVR uses global features from AAM and local features from Gabor wavelet transformation. First they perform AAM on the image to get global features and shape-free image, then they do a Gabor wavelet transformation on that shape-free image and get Gabor feature representation. They employ PCA to reduce the dimensionality of Gabor representation. After that, they did a regression analysis on AAM features and Gabor features to estimate the age of a face.

Luo et al. (2011) in order to improve the accuracy of age estimation, proposed applying Multi-Label Learning to the age features. They treat each facial image as an example associated with the origin label as well as its neighbouring ages. Their results show that this approach outperforms single-label approaches.

Luu et al. (2011) propose a facial landmarks localization method which is more accurate and faster than AAM. Their Contourlet Appearance Model (CAM) doesn't only extract global information, but also local texture information using the Nonsubsampled Contourlet Transform (NSCT). They apply this model to face age estimation, and get more accurate results.

Liang et al. (2011) base their method on Gradient Location and Orientation Histogram (GLOH) descriptor and Multi-task Learning (MTL). They use GLOH to get age related local and spatial information, and MTL is used to select the most informative GLOH bins for age estimation. The corresponding weights are determined by ridge regression. The important thing in this approach is that it decreases the computation time because of reduced dimensionality.

Choi et al. (2011) proposed a new age estimation method combining global and local facial features and a hierarchical classifier. They propose a new extraction methods for wrinkles and skin and a new hierarchical method for age estimation. Region specific Gabor filter is used to extract wrinkle features, and LBP is used to

extract skin features. The hierarchical age estimation is designed to overlap the age classes to reduce classification errors of the boundary data.

Guo, Liou and Nguyen (2011) in their research combine shape feature, texture feature and frequency feature using Active Shape Model (ASM), Radon transform and Discrete Cosine Transform (DCT) to get robust hybrid features for classification. They use SVM for hierarchical classification.

Kohli, Prakash and Gupta (2011) use AAM and ensemble of classifiers for age estimation. They extract features from face images using AAM and then use a global classifier to distinguish between child/teen-hood and adulthood, before age estimation. After that they use different aging functions to model the aging process.

Li et al. (2012) propose a new method for age estimation based on ordinal discriminative feature learning. The idea is to preserve local manifold structure, but also to keep ordinal information among aging faces. They also try to remove redundant information from locality information and ordinal information by minimizing nonlinear correlation and rank correlation.

Cao et al. (2012) base their research on the premise that face images from the same age vary too much to estimate the age accurately. First step is that rank relationships of ages is learned from various face images, then the age is estimated based on those rank relationships and the age information of a reference set. They use Gabor features for face representation.

Lu and Tan (2012) propose an ordinary preserving manifold analysis for facial age estimation to find a low-dimensional subspace so that the samples with similar label values are projected to be as close as possible, and those with different label values as far as possible. They applied ordinary preserving manifolds to LDA and Multilinear Subspace Analysis (MFA).

Li et al. (2012) look at age estimation as a problem of distance-based ordinal regression, where facial aging trend can be discovered by a learned distance metric. Using this metric, both ordinal information of age groups and local geometry structure of target neighbourhoods can be preserved.

Gao (2012) bases his research on the fact that the high variability of aging patterns and the sparsity of available data present challenges for model training. Instead of training one global aging function, he trains an individual function for each person using a multi-task learning approach. He also proposes a similarity measure for clustering these aging functions. This algorithm is called Clustered Multi-task Support Vector Regression Machine.

Weng et al. (2012) propose a Multi-feature Ordinal Ranking (MFOR) method for facial age estimation. They formulate the problem of face age estimation as a group of ordinal ranking subproblems, and each of these subproblems derives a separating hyperplane to divide face instances into two groups: age larger than  $k$  and age not larger than  $k$ . They construct multiple ordinal ranking models, each corresponding to a feature set and aggregate them into an age estimator.

Li, Wang and Zhang (2012) propose a hierarchical framework for age estimation using weighted and OHRanked Sparse Representation-based Classification. Because of the similar aging features of humans of the same age, Sparse Representation-based Classification (SRC) can be used. Adding weights and OHRank improves the results of the algorithm.

Kou, Du and Zhai (2012) combine global and local facial features for age estimation. They extract these features by using Discrete Fourier Transform (DFT) and PCA.

Zhang (2012) uses Gaussian Process (GP) and T Process (TP) for age estimation. In this method, the form of regression function is defined by kernel function and almost all parameters can be learnt automatically from the data using efficient gradient methods.

Yin and Geng (2012) propose a Conditional Probability Neural Network (CPNN), a new label distribution learning algorithm for facial age estimation. CPNN is a three layer neural network whose inputs are both the target variable and conditional feature vector, and the output is the conditional probability of the target variable given the feature vector.



Nithyashri and Kulanthaivel (2012) use wavelet transform to extract facial features. Then they calculate the Euclidean distances between each of the features. These values become inputs into Adaptive Resonance Network (ART). The output of this network is the age group (child, adolescence, adult, senior adult).

Kilinc and Akgul (2013) use the fusion of geometric and textural features for facial age estimation. They first calculate the probability that face image belongs to each overlapping age group. After that, an interpolation based technique is used for final age estimation.

Ylioinas et al. (2013) use Kernel Density Estimate (KDE) for facial representation and SVR for age estimation. The important aspect of their algorithm is its computational lightness and algorithmic simplicity.

Chao, Liu and Ding (2013) combine distance metric learning and dimensionality reduction to explore the connection between facial features and age labels. They exploit the intrinsic ordinal relationship among human ages and overcome the data imbalance problem. Also, they present an age-oriented local regression to capture the aging process.

Gunay and Nabiyev (2013) propose a method based on Radon features. This method consists of four modules: preprocessing, feature extraction with radon transform, dimensionality reduction with PCA and age estimation with multiple linear regression.

Hu et al. (2013) propose a new discriminative feature Lie Algebrized Gaussians (LAG). They built LAG on Gaussian Mixture Models (GMM) and it can capture the aging manifold of an image by preserving the Lie group manifold structure information embedded in the feature space. The age estimation is done in two steps. The first step is to obtain an adaptive age group for each image, and the second step is to learn a local classifier from selected age classes to determine the final age.

An overview of state of the art research according to feature extraction method and age estimation method can be seen in Table 2.1. Methods used in state of the art age classification and estimation algorithms.

Table 2.1. Methods used in state of the art age classification and estimation algorithms

<b>Algorithm</b>	<b>Feature extraction method</b>	<b>Age estimation method</b>	<b>Estimation</b>	<b>Classification (Number of classes)</b>
Kwon and Lobo (1994)	Active Contour Model	-	No	Yes (3)
Hornng, Lee and Chen (2001)	Sobel Edge Detector	Back Propagation Neural Networks	No	Yes (4)
Lanitis, Draganova and Christodoulou (2004)	Principal Component Analysis	Quadratic Function Shortest Distance Multilayer Perceptron Self-Organizing Map	Yes	No
Kalamani and Balasubramanie (2006)	Sobel Edge Detector	Fuzzy Lattice Neural Network	No	Yes (6)
Geng, Zhou and Smith-Miles (2007)	Active Appearance Model	Aging Pattern Subspace	Yes	No
Fu, Xu and Huang (2007)	Age Manifold	Regression Model Fitting	Yes	No
Ueki et al. (2008)	Class Distance Weighted Locality Preserving Projection	K Nearest Neighbours	Yes	No
Zhuang et al. (2008)	Patch-based Hidden Markov Model	Nearest Centroid Classifier	Yes	No
Shen and Ji (2008)	Sobel Edge Detector Haar-like Features	Gaussian Modeling Based Classification	No	Yes (2)
Ben, Su and Wu (2008)	Active Appearance Model	Linear Aging Function	Yes	No
Guo et al. (2008)	Age Manifold	Locally Adjusted Robust Regression Function	Yes	No
Guo et al. (2008)	Active Appearance Model	Support Vector Machine and Support Vector Regression	Yes	No

Suo et al. (2008)	Active Appearance Model and Hierarchical Face Model	Age Group Specific Linear Regression, Multi-layer Perceptron, Support Vector Regression and Logistic Regression	Yes	No
Qi and Zhang (2009)	Independent Component Analysis and Principal Component Analysis	Support Vector Machine	No	Yes (2)
Geng and Smith-Miles (2009)	Active Appearance Model	Multilinear Subspace Analysis	Yes	No
Guo et al. (2009)	Principal Component Analysis	Support Vector Machine and Support Vector Regression	Yes	No
Ricanek et al. (2009)	Active Appearance Model and Least Angle Regression	Support Vector Regression	Yes	No
Long (2009)	Active Appearance Model	Metric Learning	Yes	No
Gao and Ai (2009)	Gabor Feature			
Luu et al. (2009)	Active Appearance Model	Support Vector Machine and Support Vector Regression	Yes	No
Turaga, Biswas and Chellapa (2010)	Active Appearance Model	Support Vector Machine, Support Vector Regression and Ridge Regression	Yes	No
Chen et al. (2010)				
Luu et al. (2010)	Active Appearance Model and Local Ternary Patterns	Support Vector Machine and Support Vector Regression	Yes	No
Zhang and Yeung (2010)		Multi-Task Warped Gaussian Process	Yes	No
El Dib and Saban (2010)	Active Shape Model and Gabor	RBF Support Vector Regression	Yes	No

		and Support Vector Machine		
Zhai, Qing and Ji-Xiang (2010)	Improved Non-negative Matrix Factorization	Radial Basis Function	Yes	No
Duong et al. (2011)	Active Appearance Model and Local Binary Pattern	Support Vector Regression	Yes	No
Hajizedah and Ebrahimnezhad (2011)	Histogram of Oriented Gradients	K Nearest Neighbour	No	Yes (4)
Lu and Tan (2011)	Manual and Canonical Correlation Analysis	Quadratic Function	Yes	No
Selvi and Vani (2011)	Gabor Filter	Multilinear Principal Component Analysis	Yes	No
Chang, Chen and Hung (2011)	Active Appearance Model	Ordinal Hyperplane Ranking	Yes	No
Zhan, Li and Ogunbona (2011)	Extended Non-negative Matrix Factorization	Coarse to fine	Yes	Yes (4)
Chen et al. (2011)	Gabor, Active Appearance Model, Principal Component Analysis	Support Vector Regression	Yes	No
Nkengne, Tenenhaus and Fertil (2011)	Partial Least Squares Regression	Supervised Facial Model	Yes	No
Yang et al. (2011)	Active Appearance Model and Gabor	Support Vector Regression	Yes	No
Luo et al. (2011)	Multi-task Learning	Multi-label - Support Vector Machine	Yes	No
Luu et al. (2011)	Contourlet Appearance Model	Support Vector Regression and Support Vector Machine with Radial Basis Function	Yes	No

Lian et al. (2011)	Gradient Location and Orientation Histogram	Support Vector Regression and Ridge regressor	Yes	No
Choi et al. (2011)	Manual, Gabor and Local Binary Pattern	Support Vector Machine and Support Vector Regression	Yes	No
Guo, Liou and Nguyen (2011)	Active Shape Model, Radon and Discrete Cosine Transform	Support Vector Machine and Support Vector Regression	Yes	No
Kohli, Prakash and Gupta (2011)	Active Appearance Model	Classifiers based on different dissimilarities	Yes	No
Li et al. (2012)	Preserving Locality and Ordinal Information	Ordinal Hyperplane Ranking	Yes	Yes (7)
Cao et al. (2012)	Gabor	Ranking Support Vector Machine	Yes	No
Lu and Tan (2012)	Linear Discriminant Analysis and Multilinear Subspace Analysis	Ordinary Preserving Manifold Analysis	Yes	No
Li et al. (2012)	Active Appearance Model	K Nearest Neighbour Regression Model	Yes	No
Gao (2012)	Active Appearance Model	Multi-task Support Vector Regression	Yes	No
Weng et al. (2012)	Active Appearance Model and Biologically Inspired Features	Multi-feature Ordinal Ranking	Yes	No
Li, Wang and Zhang (2012)	Active Appearance Model, Active Shape Model and Local Binary Pattern	Sparse Representation-based Classification	Yes	No
Kou, Du and Zhai (2012)	Discrete Fourier Transform and Principal Component Analysis	Global and Local Classification	Yes	No

Zhang (2012)	Active Appearance Model	Gaussian Process and T Process	Yes	No
Yin and Geng (2012)	Active Appearance Model	Conditional Probability Neural Network	Yes	No
Nithyashri and Kulanthaivel (2012)	Wavelet Transformation	Adaptive Resonance Network	No	Yes (4)
Kilinc and Akgul (2013)	Local Binary Pattern, Gabor	AdaBoost	Yes	No
Ylioinas et al. (2013)	Local Binary Pattern Kernel Density Estimate	Support Vector Regression	Yes	No
Chao, Liu and Ding (2013)	Active Appearance Model	K Nearest Neighbour - Support Vector Regression	Yes	No
Gunay and Nabiyevev (2013)	Radon and Principal Component Analysis	Multiple Linear Regression	Yes	No
Hu et al. (2013)	Lie Algebrized Gaussians	Improved Hierarchical Estimation	Yes	No

According to literature review, changes in texture of human face (skin changes, wrinkles, skin elasticity etc.) are mostly influenced by external factors and are individual and change from person to person. Since in this research, global age estimation is considered, these changes are not appropriate. Also, in nowadays makeup has become an important factor in every day life for most women, and some men which influences the age estimation systems based on changes in texture of the face (Chen, Dantcheva and Ross, 2014). Other than this, more and more people use plastic surgery, botox or some other way to remove wrinkles and aging effects on their faces. This also influences age estimation systems. If an age estimation system with good accuracy, based only on facial shape changes, was to be developed, it would be a great improvement in this field.

Table 2.2. State of the art papers by sources

<b>Name of the source</b>	<b>No. of papers</b>
IC on Automatic Face and Gesture Recognition	2
IC on Computer Vision and Pattern Recognition	3
IC on Biometrics: Theory, Applications and Systems	3
IC on Image Processing	2
IC on Pattern Recognition	3
Transactions on Pattern Analysis and Machine Intelligence	1
IC on Intelligent Computing	4
Computer Society Conference on Computer Vision and Pattern Recognition	3
IC on Acoustics, Speech and Signal Processing	4
IC on Control, Automation, Robotics and Vision	1
IC on Machine Learning and Cybernetics	1
IC on Multimedia and Expo	1
Pattern Recognition	2
Transactions on Image Processing	1
Transactions on Systems, Man and Cybernetics	2
IC on Biometrics	2
IC on System Science and Engineering	2
ISNN	2
Multimedia Tools Application	1

Computer and Information Sciences	1
IC on Advanced Computing	1
IC on Image Analysis and Processing	1
IC on Intelligent Systems Design and Applications	1
IC on Recent Trends in Information Technology	1
IS on Biomedical Imaging: From Nano to Macro	1
International Workshop on Multimedia Signal Processing	1
Iranian Machine Vision and Image Processing	1
Pacific-Asia Conference on knowledge Discovery and Data Mining	1
Tamkang Journal of Science and Engineering	1
IC on Computer Graphics, Imaging and Visualization	1
Advances in Biometrics	1
Chinese Conference on Biometric Recognition	4
International Joint Conference on Computer Vision, Imaging and Computer Graphics Theory and Applications	1
Multimedia Tools and Applications	1

It can be seen in Table 2.2. State of the art papers by sources, that most of the papers on age estimation algorithms were published in conference proceedings. The conferences are international conferences from different parts of the world, specialized in image processing, computer vision and biometrics, which ensures the quality of research. Also, the largest number of research on age estimation has been published in 2011 as can be seen in Table 2.3. State of the art papers by year of publication.

Table 2.3. State of the art papers by year of publication

<b>Year of publication</b>	<b>No. of papers</b>	<b>Year of publication</b>	<b>No. of papers</b>
2013	5	2007	2
2012	11	2006	1
2011	15	2004	1
2010	6	2001	1
2009	7	1994	1
2008	7		



## 2.1. Aging Face

Human face goes through different changes during growth and aging. One of the changes during a person's aging process is the change in craniofacial morphology (CM). Different craniofacial characteristics appear at different ages and change during the aging process. One of the most important researches in this field is the one conducted by Farkas (1994) and Farkas and Munro (1987). Farkas (1994) took measurements from 57 facial landmarks. There were three kinds of measurements: projective measurements (defined as the shortest distance between two landmarks), tangential measurements (defined as the distance between two landmarks measured along skin surface) and angular measurements. In this research Farkas also identified landmarks that can be estimated from photographs of human faces. According to Ramanathan and Chellapa (2006) only projective measurements can be estimated accurately using photogrammetry of frontal face images. That is the reason this research uses these measurements as its basis.

According to Fu, Guo and Huang (2010) there are two main stages of facial changes. First stage is early growth and development of the face. In this stage the face size is getting larger during the craniofacial growth. Because of that growth, other facial features change also. Forehead slopes back, shrinks and releases spaces on the surface of the cranium. Eyes, ears, nose and mouth expand and cover interstitial spaces. Cheeks extend to larger areas and the chin becomes more protrusive. In this stage, the skin does not change much. The second stage is adult aging, where the most changes are skin aging and changes in texture. There are some changes in shape, but not as big as in the first stage.

Many studies related to CM of individuals from different aspects have been conducted. One of these studies was conducted by Coleman and Grover (2006) which refers to changes in the three-dimensional human face geometry during the aging process. Coleman and Grover conducted their research in terms of plastic surgery, in order to cancel the results of aging. They have focused on adults and unwanted changes on the face during the aging process. Some of the changes they stated, and according to which it is possible to discern the age of people are: reduction in the height of the face,

increase in the width and depth of the face, and facial features (nose, chin) become more distinct. They also divide the face into thirds and claim that human beauty is contained in the central part of the face. Ricanek (2008) researched the craniofacial characteristics of aging in terms of building more robust systems for face recognition in biometrics. He provides an overview of changes in facial structure and soft tissues over the years.

Geng, Yun and Smith-Miles (2010) in their work on automatic age estimation recognize two phases of facial aging. The first phase is the early years, defined as the years from birth to adulthood. At this stage, most of the changes are changes in craniofacial growth, as shown in Figure 2.1. Head shape changes caused by craniofacial growth (Geng, Yun and Smith-Miles, 2010):

- Beard becomes more prominent
- Cheeks are spread over a larger area
- Facial characteristics increase and cover the interstitial spaces
- Forehead falls backwards, reducing the free space on the surface of the skull

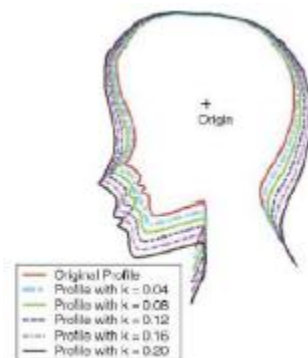


Figure 2.1. Head shape changes caused by craniofacial growth (Geng, Yun and Smith-Miles, 2010)

In addition to changes caused by craniofacial growth, minor skin changes occur (Geng, Yun and Smith-Miles, 2010):

- Facial hair become thicker and change color
- Skin color changes

The second phase of facial aging recognized by Geng, Yun and Smith-Miles (2010) is during adulthood. Adulthood is defined as the time from the end of growth to old age. The main changes in this stage are skin changes. The skin becomes thinner, darker, less

elastic and more leathery. Also, there are wrinkles, underchin, cheeks sag and bags under the eyes appear. But there is also some small craniofacial growth at this stage, mainly changes in the shape of the face, but most of craniofacial growth occurs at an early age of the individual, which can be seen in Figure 2.2 Craniofacial changes during growth and aging from Fg-net database.



Figure 2.2. Craniofacial changes during growth and aging from Fg-net database (Fg-net, 2014)

Nakai, Okakura and Arakawa (2010) and Okakura and Arakawa (2011) define five ways in which human face shape changes: the face becomes longer, eyebrow become thicker, eyes become thinner, nose becomes longer and ridge sharper and wings of nose become wider.

To summarize all this research, Table 2.4. Face shape changes caused by growth or aging, gives an overview of changes during growth and aging.

Table 2.4. Face shape changes caused by growth or aging

Paper	Growth or aging	Change
Fu, Guo and Huang (2010), Geng, Yun and Smith-Miles (2010)	growth	Forehead slopes back, shrinks and releases spaces on the surface of the cranium
Fu, Guo and Huang (2010), Geng, Yun and Smith-Miles (2010)	growth	Eyes, ears, nose and mouth expand and cover interstitial spaces
Fu, Guo and Huang (2010), Geng, Yun and Smith-Miles (2010)	growth	Cheeks extend to larger areas
Fu, Guo and Huang (2010), Geng, Yun and Smith-Miles (2010)	growth	Chin becomes more protrusive

Coleman and Grover (2006)	aging	Reduction in the height of the face
Coleman and Grover (2006)	aging	Increase in the width and depth of the face
Nakai, Okakura and Arakawa (2010), Okakura and Arakawa (2011)	growth	Face becomes longer
Nakai, Okakura and Arakawa (2010), Okakura and Arakawa (2011)	growth	Eyebrows become thicker
Nakai, Okakura and Arakawa (2010), Okakura and Arakawa (2011)	growth	Eyes become thinner
Nakai, Okakura and Arakawa (2010), Okakura and Arakawa (2011)	growth	Nose becomes longer
Nakai, Okakura and Arakawa (2010), Okakura and Arakawa (2011)	growth	Ridge becomes sharper
Nakai, Okakura and Arakawa (2010), Okakura and Arakawa (2011)	growth	Wings of nose become wider

## 2.2. Types of Age

According to Geng, Yun and Smith-Miles (2010) there are several types of age:

- Chronological age is defined as the number of years a person has lived.
- Appearance age is the age information defined by appearance of the person.
- Perceived age is defined by people based on the appearance of the person.
- Estimated age is an age defined by the computer from the way person a looks.

Appearance age is usually very close to the chronological age. The objective of age estimation is that estimated age is as close to chronological or appearance age as possible.

## 2.3. Face Representation Models

There are a large number of different face representation models described in the introduction of this chapter. The most important models recognized in literature are (Geng, Yun and Smith-Miles, 2010), (Guo, Fu and Huang, 2009), (Fu, Guo and Huang, 2010), (Guo, 1994):

- Anthropometric Model,
- Active Appearance Model,
- Aging Pattern Subspace,
- Age Manifold,
- Biologically-Inspired Models.

### 2.3.1. *Anthropometric Model*

Facial Anthropometry is the science of measuring the size and proportions of the human face (Montagu, 1960).

The main idea of this model is to consult research related to craniofacial growth and development. Craniofacial research theory uses a mathematical model for description of head from birth to adulthood:

$$\Theta' = \Theta, R' = R(1 + k(1 - \cos\Theta)) \quad (1)$$

where  $\Theta$  is the angle formed by the vertical axis,  $R$  is the radius of the head circle,  $k$  is a parameter which increases with time, and  $(R', \Theta')$  circuit growth over time (Alley, 1998).

Farkas (1994) gave an overview of facial anthropometry. He defined facial anthropometric as measures taken from 57 characteristic points of the face taken over years. For age estimation, distances and ratios between characteristic points are commonly used, instead of using a mathematical model, because it is difficult to measure face profile on the two-dimensional face images (Fu, Guo and Huang, 2010).

Computations in this model are based on the craniofacial development theory. Changes in the appearance of face caused by growth are sufficient to categorize faces in several age groups. This model is suitable for a rough age estimation, but not for detailed classification (Fu, Xu and Huang, 2007). This is the main reason why Kwon and Lobo (1999) used wrinkle analysis to do the separation between young adults and seniors.

The anthropometric model is based on human face ratios, as shown on Figures 2.3 to 2.8.

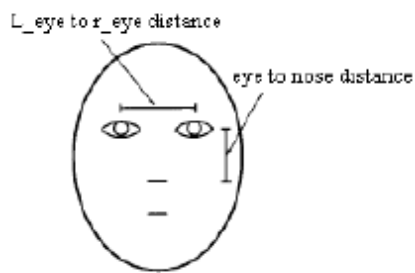


Figure 2.3. Anthropometric ratio 1 on human face (Kwon and Lobo, 1999)




Figure 2.4. Anthropometric ratio 2 on human face (Kwon and Lobo, 1999)



Figure 2.5. Anthropometric ratio 3 on human face (Kwon and Lobo, 1999)




Figure 2.6. Anthropometric ratio 4 on human face (Kwon and Lobo, 1999)




Figure 2.7. Anthropometric ratio 5 on human face (Kwon and Lobo, 1999)




Figure 2.8. Anthropometric ratio 6 on human face (Kwon and Lobo, 1999)

In practice, anthropometric model can only be used for en face images for measuring facial geometry, because the distances and ratios are calculated from two-dimensional images of individuals that are sensitive to the positions (Fu, Guo and Huang, 2010). This model takes into account only geometry of face, without information about the texture.

### 2.3.2. *Active Appearance Model*

This model was proposed by Cootes, Edwards and Taylor (1998). Using facial images, statistical shape model and intensity model are learned separately. It is an algorithm for matching a statistical model of object shape and appearance to a new image. They are built during a training phase and by taking advantage of the least squares techniques, it can match to new images easily. The active appearance model is related to the active shape model. One disadvantage of active shape model is that it only uses shape constraints and does not take advantage of all the available information, especially the texture across the target object. This can be modeled using an active appearance model (Cootes, Edwards and Taylor, 1998).

In 2002 The AAM has been expanded to facial aging (Lanitis, Taylor and Cootes, 2002) suggesting an aging function defined by  $age = f(b)$ , to explain the variation in years.  $Age$  is the age of a person in the picture,  $b$  is a vector containing 50 parameters learned from AAM, and  $f$  is an aging function. The function defines the relationship between person's age and facial description parameters (Fu, Guo and Huang, 2010).

There are different forms of an aging function. Some examples of such functions are: quadratic aging function, linear aging function, cubic aging function and other.

Unlike anthropometric model, AAM is not oriented only to younger people, but deals with assessment of the age of people of all ages. It works in a way that takes into consideration not only the geometry of human face, but its texture also. In this way the age of a person can be estimated more accurately (Fu, Guo and Huang, 2010).

### 2.3.3. *Aging Pattern Subspace*

Instead of using every face image separately, aging pattern subspace model uses a sequence of facial aging images to model the aging process. This model was developed by Geng, Zhou and Smith-Miles (2007) and named Aging Pattern Subspace (AGES). Aging pattern is defined as a sequence of facial image of a person, sorted by time.

AGES works in two steps. The first step is a learning step, the second step is the age estimation step (Fu, Guo and Huang, 2010). In the first step, PCA is used to obtain the subspace representation. The difference from the standard PCA approach is that there are probably no images for each year for each aging pattern. So Expectation-Maximization (EM) is used as a method of iterative learning to minimize error in reconstruction. Error while reconstruction is defined as the difference between the available images of the face and the face reconstructed images (Fu, Guo and Huang, 2010). In the second step, the test face image needs to find a pattern of aging that suits that image, and the exact position of the year in the sample. Position year returned is the estimated age of a person in the test image (Fu, Guo and Huang, 2010).

To cope with incomplete data, due to difficulties in data collection, the aging pattern subspace models the sequence of a person's aging face images by learning subspaces. Age of the person being tested is determined by the projection in the subspace that can best reconstruct the face image (Fu, Xu and Huang, 2007).

Methods based on aging functions view age estimation as a classification problem: face images are data, and the goal is the age of a person in the picture. According to



Geng, Zhou and Smith-Miles (2007) aging pattern is a sequence of images sorted by age.

The emphasis of this model is the use of facial images of a person at different ages to define the aging pattern.

#### 2.3.4. *Age Manifold*

Instead of learning the specific aging pattern for each person, it is possible to learn the common pattern of aging for more than one person at different ages. For each age, more than one facial image is used for age representation. Each person can have several face images at one age or in an age range (Fu, Guo and Huang, 2010). Therefore, this model is more flexible than AGES model, and it is much easier to collect a larger number of samples (facial images) and create a larger database.

This model uses a manifold embedding technique for learning a low-dimensional aging trend for many facial images of the same age. The only requirement of this model is that the sample size for learning is large enough so that embedded manifold can be taught with statistical sufficiency (Fu and Huang, 2008).

#### 2.3.5. *Biologically-Inspired Models*

One of the most accurate age estimation algorithms to date is the EBIF algorithm based on biologically inspired models. The idea for biologically inspired model (BIF) came from human vision system. It showed good results in object recognition, so Guo et al. (2009) adapted this model to human age estimation based on face images. In object category recognition, prototypes are randomly selected from learning images and stored for template matching in S2 units (Guo, 1994). Guo et al. (2009) found that these features from pre-learned prototypes do not do well in age estimation, so they proposed a new model that has S1 and C1 units and a STD operation in C1 feature extraction (Guo, 1994).

BIF can deal with small changes in rotation, scale and image translation, so it is good to combine BIFs with manifold learning which is sensitive to image alignment (Guo, 1994).

### 2.3.6. Discussion

Each of the described models has its advantages and disadvantages. The overview of these characteristics can be seen in Table 2.5. Advantages and disadvantages of face representation models.

Table 2.5. Advantages and disadvantages of face representation models

<b>Model</b>	<b>Advantages</b>	<b>Disadvantages</b>
Anthropometric Model	Useful for age group classification Useful for younger people age estimation	Considers shape only Sensitive to head poses
Active Appearance Model	Considers shape and texture Deals with any age Robust against head poses	Has problems with incomplete data
Aging Pattern Subspace	Copes with incomplete data	Learning aging pattern for each person separately Hard to collect sufficient data
Age Manifold	More flexible Easier to collect data	Sensitive to image alignment
Biologically Inspired Model	Deals with changes in rotation, scale and alignment	

Since anthropometric model is the only model that separates facial texture from facial ratios and is specialized in age classification of young people, this model is chosen for facial representation. Also, anthropometric model has not yet been evaluated on a large database so this is another contribution to the field of age estimation.

## 2.4. Aging Function Learning Methods

All of the research on age estimation can be grouped in (Guo et al., 2009): multiclass classification problem, regression problem and hybrid approach as a combination of these two (Figure 2.9. Classification of aging function learning method).

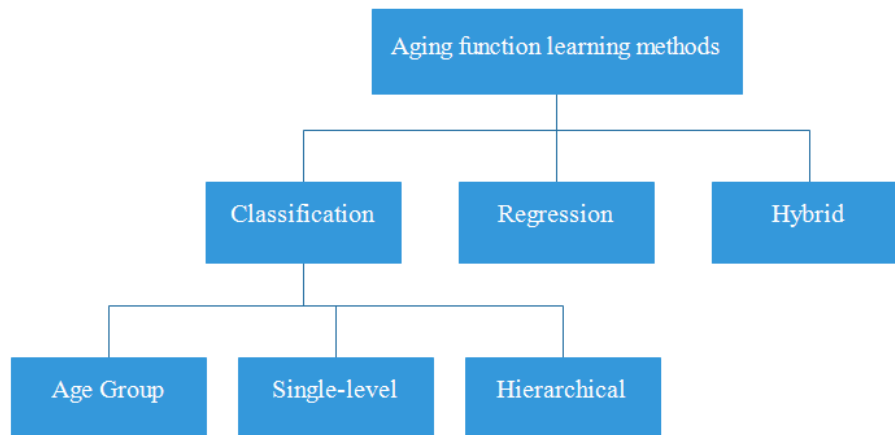


Figure 2.9. Classification of aging function learning methods

### 2.4.1. *Classification*

If age estimation is viewed as a classification problem each age label is treated as a single class (Fu, Guo and Huang, 2010). There are a large number of classifiers used in age estimation (Guo, 1994), (Choi et al., 2011):

- Artificial Neural Networks
- Support Vector Machines
- Nearest Neighbour
- Quadratic function
- Fuzzy Linear Discriminant Analysis
- Hierarchical estimation
- Support Vector Regression
- Multilayer Perceptron

Some of the researchers who have studied the problem of age estimation as a classification problem are Lanitis, Draganova and Christodoulou (2004), Guo et al. (2008), Ueki, Hayashida and Kobayashi (2006) and many other.

Age classification can further be divided into three approaches (Choi et al., 2011): Classification into age groups, single-level age estimation or hierarchical age estimation.

Age group classification is an approach that roughly estimates the age group. It is suitable for coarse classification, but it is not so good for detailed age estimation. Single-level and hierarchical age estimation focus on a detailed assessment of the age. Single-level age estimation finds age label in full dataset using a single estimator (Choi et al., 2011). Hierarchical age estimation is a rough-fine method for finding age labels in a smaller data set. First, age group in which an image belongs to is estimated. Then, based on the age group, detailed age is estimated. It improves the performance by considering the differences of age feature values according to age group. If there is an error in age group estimation step it transfers to detailed age estimation step (Choi et al., 2011).

#### 2.4.2. *Regression*

There is another way in which age estimation can be observed. Age is a sequential set of values and the age estimation can be viewed as a regression problem (Fu, Guo and Huang, 2010).

Regressors used for age estimation (Guo, 1994):

- Quadratic Function
- Multiple Linear Regressor
- Support Vector Regression
- Semi-definite Programming Technique
- Expectation-Maximization
- Robust Multi-instance Regression
- Least Angle Regression

Age estimation as a regression problem has been researched by Lanitis, Draganova and Christodoulou (2004), Fu, Xu and Huang (2007), Yan et al. (2007), Zhou et al. (2005), Ni, Song and Yan (2009) and other.

### 2.4.3. *Hybrid*

The third view is a hybrid approach. This approach raises the question of which of the above approaches is better to estimate the age (Fu, Guo and Huang, 2010). Some of the researchers compared the above approaches on multiple databases. For example, Guo et al. (2008) concluded that SVM performs better on YGA database, and SVR performs better on Fg-net database. So there is no universal conclusion which is better because it depends on the database used.

# Chapter 3: New Algorithm for Age Classification

There are a lot of problems in age classification and estimation and this is why it's such a challenging field of research. One major problem is the lack of quality images, and since the research involves minors, there is a problem of collecting photographs of minors. Other constraint is the correct facial landmark determination. There are various algorithms for facial landmark detection, but manual detection is still the most accurate.

All of the algorithms in previous research have two basic steps: feature extraction and classification. In the newly developed algorithm in this research, facial landmarks are manually selected and they serve as an input to the algorithm. Classification in the algorithm is done using multilayer perceptron. An overview of the algorithm is shown as a block diagram in Figure 3.1. Block diagram of the new algorithm.

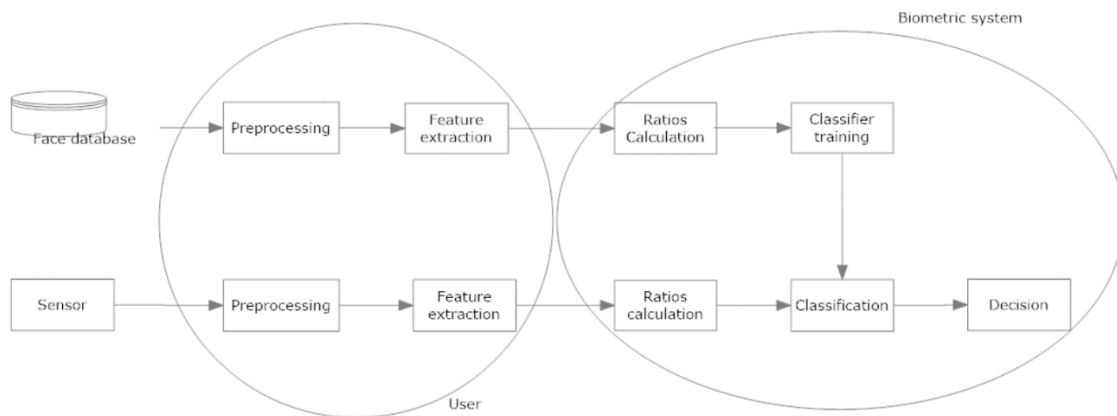


Figure 3.1. Block diagram of the new algorithm

## 3.1. Face Representation

As explained in previous chapters, there are many face representation models used in literature. This research uses anthropometric model as a starting point. Next chapters

describe facial landmarks and ratios used for age classification and estimation in this algorithm.

### 3.1.1. *Facial Landmarks*

In order to calculate the ratios on human face, important facial landmarks need to be selected. Next six images show facial landmarks used for age estimation by different authors (Figure 3.2. to Figure 3.7.).



Figure 3.2. Landmark points as identified by Kleinberg and Siebert (2012)



Figure 3.3. Landmark points as identified by Takimoto et al. (2007)



Figure 3.4. Landmark points as identified by Txia and Huang (2009)





Figure 3.5. Landmark points as identified by Ramanathan and Chellapa (2006)



Figure 3.6. Landmark points as identified by Kostinger et al. (2011)



Figure 3.7. Landmark points as identified by Izadpanhi and Toygar (2012)

Based on literature analysed, 57 facial landmark points are defined. From all landmarks used in previous researches, landmarks used at least two times are selected as relevant in this research. All of these landmark points are shown in Figure 3.8. All landmark points as identified in literature. The abbreviations of the landmarks and their names are shown in Table 3.1. Landmark points identified in literature

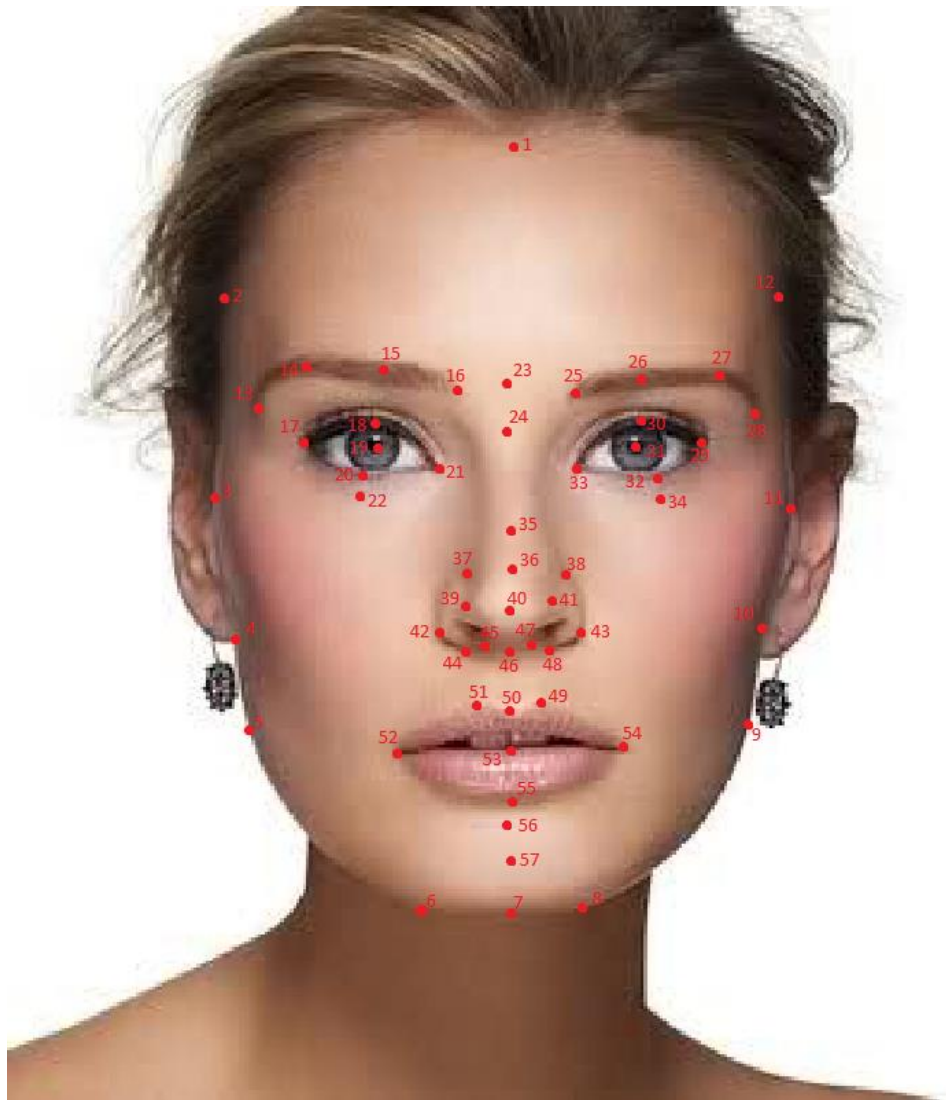


Figure 3.8. All landmark points as identified in literature

Table 3.1. Landmark points identified in literature

No.	Abbreviation	Description
1	HH	Highest point of the head
2	MFL	Middle point of the forehead (left)
3	PHL	Most protruded point of the head (left)
4	MPL	Midpoint between PHL and LAML
5	LAML	Most lateral point at the angle of the mandible (left)
6	PMTL	Protrusion of the mental tubercle (left)
7	LMLC	Lowest point in the midline on the lower border of the chin
8	PMTR	Protrusion of the mental tubercle (right)
9	LAMR	Most lateral point at the angle of the mandible (right)
10	MLP	Midpoint between LAMR and PHR

11	PHR	Most protruded point of the head (right)
12	MFR	Middle point of the forehead (right)
13	LEBL	Most lateral point of the eyebrow (left)
14	HUMEL	Highest point on the upper margin of the midline portion of the eyebrow (left)
15	MBHML	Midpoint between HUMEL and MHEL (left)
16	MHEL	Medial hinge of the eyebrow (left)
17	LEL	Lateral hinge of the eyelid (left)
18	HEL	Highest point of the eyelid (left)
19	MPEL	Middle point of the eye (left)
20	LMLEL	Lowest point in the middle of the margin of the lower eyelid (left)
21	MEL	Medial hinge of the eyelid (left)
22	LPMEL	Lowest point in the middle of eyesocket (left)
23	MNS	Midpoint of the nasofrontal suture
24	FMN	Point of the nose where forehead meets the nose
25	MHER	Medial hinge of the eyebrow (right)
26	MBHMR	Midpoint between HUMER and MHER (right)
27	HUMER	Highest point on the upper margin of the midline portion of the eyebrow (right)
28	LEBR	Most lateral point of the eyebrow (right)
29	LER	Lateral hinge of the eyelid (right)
30	HER	Highest point of the eyelid (right)
31	MPER	Middle point of the eye (right)
32	LMLER	Lowest point in the middle of the margin of lower eyelid (right)
33	MER	Medial hinge of the eyelid (right)
34	LPMER	Lowest point in the middle of eyesocket (right)
35	NB	Nose bridge
36	MBNP	Midpoint between NB and PNT
37	MUNAL	Most upper point of the nasal ala (left)
38	MUNAR	Most upper point of the nasal ala (right)
39	MNAOL	Medial point of the nasal ala outer margin (left)
40	PNT	Most protruded point of the nasal tip
41	MNAOR	Medial point of the nasal ala outer margin (right)
42	LNAL	Most lateral point of the nasal ala (left)
43	LNAR	Most lateral point of the nasal ala (right)
44	LNL	Most lateral point of the nose (left)
45	LNAIL	Lowest lateral point of the nasal ala inner margin(left)
46	INTUL	Most inner point between the nose tip and upper lip
47	LNAIR	Lowest lateral point of the nasal ala inner margin(right)
48	LNR	Most lateral point of the nose (right)
49	HULR	Highest point of the upper lip (right)

50	MVUL	The midpoint of the vermillion border of the upper lip
51	HULL	Highest point of the upper lip (left)
52	LULML	Most lateral point where the upper and the lower lip meet (left)
53	MULLM	Midline point where upper and lower lip meet
54	LULMR	Most lateral point where the upper and the lower lip meet (right)
55	MLLL	Midpoint of the lower margin of the lower lip
56	MPLL	Midpoint of the pogonion and lower lip
57	AC	Most anterior point of the chin

If changes that happen during facial growth and aging are taken into consideration, some of these landmarks can be omitted. The second step of purification occurs and new set of landmarks is defined (Figure 3.9. Landmark points used in this research and Table 3.2. Landmark points used in this research).



Figure 3.9. Landmark points used in this research

Table 3.2. Landmark points used in this research

No.	Abbreviation	Description
1	HH	Highest point of the head
2	MFL	Middle point of the forehead (left)
3	PHL	Most protruded point of the head (left)
5	LAML	Most lateral point at the angle of the mandible (left)
7	LMLC	Lowest point in the midline on the lower border of the chin
9	LAMR	Most lateral point at the angle of the mandible (right)
11	PHR	Most protruded point of the head (right)
12	MFR	Middle point of the forehead (right)
17	LEL	Lateral hinge of the eyelid (left)
18	HEL	Highest point of the eyelid (left)
20	LMLEL	Lowest point in the middle of the margin of the lower eyelid (left)
21	MEL	Medial hinge of the eyelid (left)
24	FMN	Point of the nose where forehead meets the nose
29	LER	Lateral hinge of the eyelid (right)
30	HER	Highest point of the eyelid (right)
32	LMLER	Lowest point in the middle of the margin of lower eyelid (right)
33	MER	Medial hinge of the eyelid (right)
40	PNT	Most protruded point of the nasal tip
43	LNAR	Most lateral point of the nasal ala (right)
46	INTUL	Most inner point between the nose tip and upper lip
49	HULR	Highest point of the upper lip (right)
51	HULL	Highest point of the upper lip (left)
53	MULLM	Midline point where upper and lower lip meet
54	LULMR	Most lateral point where the upper and the lower lip meet (right)
55	MLLL	Midpoint of the lower margin of the lower lip
56	MPLL	Midpoint of the pogonion and lower lip

In the end, there are 26 facial landmarks used in this research. As it was mentioned earlier, facial landmarks are detected manually. To this end, a Python script that records mouse click positions was created.

### **Landmark\_annotatation.py**

```
import os
import Tkinter
import Image, ImageTk

root=Tkinter.Tk()
def button_click_exit_mainloop (event):
    event.widget.quit()
```

```

logfile=open("landmarks.csv", "a")
logfile.write("\n")

def callback(event):
    logfile=open("landmarks.csv", "a")
    logfile.write(str(event.x))
    logfile.write(";")
    logfile.write(str(event.y))
    logfile.write(";")

root.bind("<Button-2>", button_click_exit_mainloop)
root.bind("<Button-1>", callback)
root.geometry('+%d+%d' % (200,200))
dirlist=os.listdir(".")
old_label_image=None
for f in dirlist:
    try:
        logfile=open("landmarks.csv", "a")
        logfile.write(str(f))
        images=Image.open(f)
        root.geometry('%dx%d' % (images.size[0],images.size[1]))
        tkpi=ImageTk.PhotoImage(images)
        label_image=Tkinter.Label(root, image=tkpi)
        label_image.place(x=0,y=0,width=images.size[0],height=images.size[1])
        root.title(f)
        if old_label_image is not None:
            old_label_image.destroy()
        old_label_image=label_image
        root.mainloop()
    except:
        pass
logfile.close("landmarks.csv")

```

Input to the script is an image, and output is a file with coordinates of selected landmarks (landmarks.csv). This file is later saved as *fg-net\_coordinates.xlsx*.

### 3.1.2. Ratios

After defining facial landmarks important for age estimation, important ratios need to be defined. In this research, important ratios are defined based on statistical analysis of correlation between all ratios on human face and age of a person.

In order to define these ratios, Euclidean distances between specific landmarks need to be calculated using the formula for Euclidean distance (2).

If A and B are points in two-dimensional space with coordinates  $(x_1, y_1)$  and  $(x_2, y_2)$  respectively, Euclidean distance between those two points is defined as

$$d(A, B) = \sqrt{(x_2 - x_1)^2 + (y_2 - y_1)^2}. \quad (2)$$

All possible distances between facial landmarks ( $d_n$ ) are calculated using the formula for number of diagonals of an  $n$  sided polygon and adding the number of sides of a polygon (Artrea, 2015):

$$d_n = \frac{n(n-3)}{2} + n \quad (3)$$

There are 325 possible distances on human face based on previously determined facial landmarks.

Next step is to define ratios important for age estimation. First, all possible ratios are calculated. Number of ratios is calculated by:

$$NPR \text{ (Number of Possible Ratios)} = \binom{n}{r} = \frac{n!}{r!(n-r)!} \quad (4)$$

where  $n$  is the number of elements (in this case 325) and  $r$  is number of classes (in this case 2).

Ratios are calculated using Python. Excel table with landmark position is given to the Python script and excel table with all possible ratios is the output. *Distances.py* script calculates distances between landmarks from *fg-net\_coordinates.xlsx*.

### **Distances.py**

```
from xlrd import open_workbook
from xlwt import Workbook
import math

wb = open_workbook('fg-net_coordinates.xlsx')
sheet=wb.sheet_by_index(0)
coordinates=[0]*52
distance=0
for row in range(2,sheet.nrows):
    for col in range(3,sheet.ncols):
        coordinates[col-3]=sheet.cell(row,col).value
print coordinates
for i in range(0,len(coordinates),2):
    for j in range(0,len(coordinates),2):
        if j>i:
```



```

        distance=math.sqrt(((coordinates[j]-coordinates[i])*(coordinates[j]-
coordinates[i]))+((coordinates[j+1]-coordinates[i+1])*(coordinates[j+1]-coordinates[i+1])))
        logfile=open("distances.csv", "a")
        logfile.write(str(distance) + ";")
        logfile.close()
    logfile=open("distances.csv", "a")
    logfile.write("\n")
    logfile.close()

```

*Ratios.py* script calculates the ratios from distances given in *distances.xlsx*.

### **Ratios.py**

```

from xlrd import open_workbook
from xlwt import Workbook
import math

wb = open_workbook('distances.xlsx')
sheet=wb.sheet_by_index(1)
distances=[0]*326
ratio=0

for row in range(2,sheet.nrows):
    for col in range(1,sheet.ncols):
        distances[col-1]=float(sheet.cell(row,col).value)
    print distances
    for i in range(0,30):
        for j in range(0,len(distances)):
            if j>i:
                ratio=distances[i]/distances[j]
                logfile=open("ratios.csv", "a")
                logfile.write(str(ratio) + ";")
                logfile.close()
    logfile=open("ratios.csv", "a")
    logfile.write("\n")
    logfile.close()

```

The number of ratios is 52650. It is obvious that this is too large a number to do computations with, so only the important ratios need to be selected. These ratios are defined by using correlation between ratios and age of a person. First, scatter matrices are plotted (Figure 3.10. Correlation between years and ratio  $d(\text{MFL},\text{LAML})/d(\text{MFL},\text{MFR})$  and Figure 3.11. Correlation between years and ratio  $d(\text{MFL},\text{PHR})/d(\text{PHL},\text{LAML})$ ) using IBM SPSS Statistics software. It can be seen that correlation between ratios and age is non-linear.

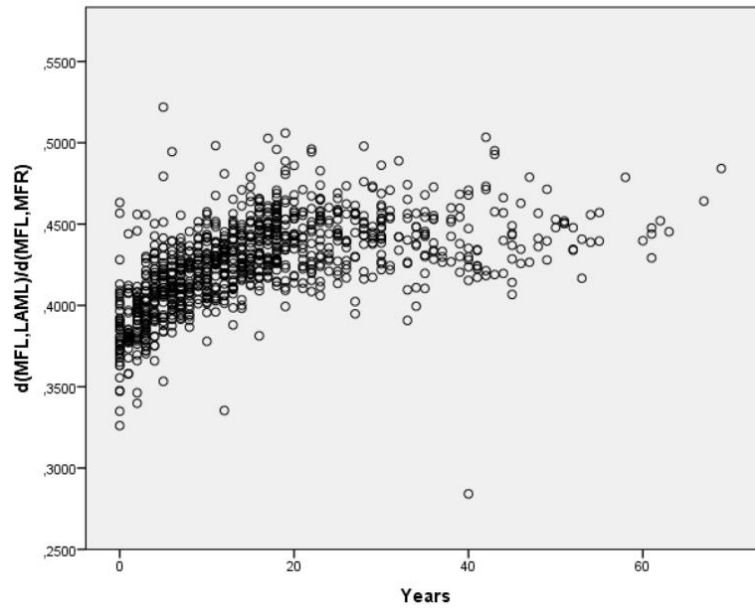


Figure 3.10. Correlation between years and ratio  $d(\text{MFL}, \text{LAML})/d(\text{MFL}, \text{MFR})$

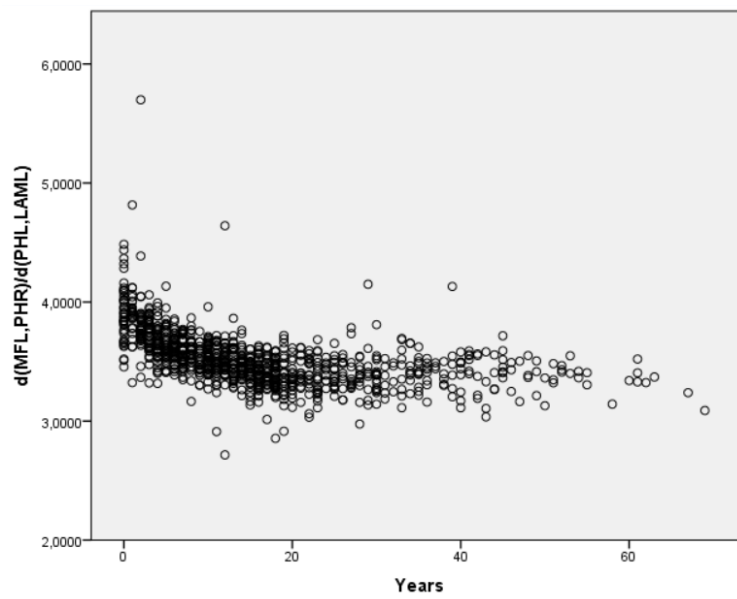


Figure 3.11. Correlation between years and ratio  $d(\text{MFL}, \text{PHR})/d(\text{PHL}, \text{LAML})$

In order to calculate the correlation between ratios and age, Spearman coefficient is used.

Table 3.3. Spearman coefficients

Ratio	Spearman coefficient
d(MFL, LAML)/d(MFL,PHR)	0.653
d(MFL, LAML)/d(MLF,MFR)	0.669
d(MFL, LAML)/d(PHL,PHR)	0.612
d(MFL, LAML)/d(PHL,MFR)	0.639
d(MFL,LMLC)/d(MFL,MFR)	0.627
d(MFL,PHR)/d(LMLC,LMLEL)	0.609
d(MFL,PHR)/d(LAMR,PHR)	0.630
d(MFL,PHR)/d(LAMR,MFR)	0.641
d(MFL,PHR)/d(PHL,LAML)	0.667
d(MFL,MFR)/d(LMLC,LMLEL)	0.634
d(MFL,MFR)/d(LMLC,MEL)	0.608
d(MFL,MFR)/d(LAMR,PHR)	0.648
d(MFL,MFR)/d(LAMR,MFR)	0.667
d(MFL,MFR)/d(PHR,MFR)	0.659
d(MFL,MFR)/d(PHL,LAML)	0.682
d(MFL,MFR)/d(LMLC,PHR)	0.623
d(MFL,MFR)/d(LMLC,MFR)	0.625
d(PHL,LAML)/d(PHL,PHR)	0.629
d(PHL,LAML)/d(PHL,MFR)	0.656
d(PHL,PHR)/d(LAMR,MFR)	0.606
d(PHL,MFR)/d(LAMR,MFR)	0.641
d(LMLC,LEL)/d(LEL,LER)	0.626
d(LMLC,LEL)/d(LEL,HER)	0.602
d(LMLC,LEL)/d(HEL,LER)	0.625
d(LMLC,LEL)/d(LMLEL,LER)	0.601
d(LMLC,LEL)/d(MEL,LER)	0.633
d(LMLC,HEL)/d(LEL,LER)	0.608
d(LMLC,HEL)/d(HEL,LER)	0.609
d(LMLC,HEL)/d(MEL,LER)	0.609
d(LMLC,LMLEL)/d(LEL,LER)	0.646
d(LMLC,LMLEL)/d(LEL,HER)	0.630

Ratio	Spearman coefficient
d(LMLC,LMLEL)/d(LEL,LMLER)	0.614
d(LMLC,LMLEL)/d(LEL,MER)	0.609
d(LMLC,LMLEL)/d(HEL,LER)	0.653
d(LMLC,LMLEL)/d(HEL,HER)	0.628
d(LMLC,LMLEL)/d(HEL,LMLER)	0.620
d(LMLC,LMLEL)/d(LMLEL,LER)	0.631
d(LMLC,LMLEL)/d(LMLEL,HER)	0.616
d(LMLC,LMLEL)/d(MEL,LER)	0.666
d(LMLC,LMLEL)/d(MEL,HER)	0.629
d(LMLC,LMLEL)/d(MEL,LMLER)	0.611
d(LMLC,MEL)/d(LEL,LER)	0.617
d(LMLC,MEL)/d(LEL,HER)	0.608
d(LMLC,MEL)/d(HEL,LER)	0.613
d(LMLC,MEL)/d(MEL,LER)	0.629
d(LMLC,MEL)/d(MEL,HER)	0.600
d(LMLC,LER)/d(LEL,HER)	0.610
d(LMLC,HER)/d(LEL,HER)	0.610
d(LMLC,LMLER)/d(LEL,LER)	0.619
d(LMLC,LMLER)/d(LEL,HER)	0.637
d(LMLC,LMLER)/d(LEL,LMLER)	0.620
d(LMLC,LMLER)/d(LEL,MER)	0.627
d(LMLC,LMLER)/d(HEL,HER)	0.606
d(LMLC,LMLER)/d(LMLEL,HER)	0.601
d(LMLC,LMLER)/d(MEL,LER)	0.605
d(LMLC,LMLER)/d(MEL,HER)	0.618
d(LMLC,MER)/d(LEL,LER)	0.614
d(LMLC,MER)/d(LEL,HER)	0.623
d(LMLC,MER)/d(LEL,LMLER)	0.605
d(LMLC,MER)/d(LEL,MER)	0.610
d(LMLC,MER)/d(MEL,LER)	0.605
d(LMLC,MER)/d(MEL,HER)	0.606

After calculation of Spearman coefficient, only 62 ratios with high correlation are selected for further calculation. Other ratios have medium or low correlation. The selected ratios and their correlation coefficient can be seen in Table 3.3. Spearman coefficients.

## 3.2. Classification

Classification in the algorithm is done with neural networks. More precisely, multi layer perceptron is used. Classification is done in IBM SPSS Statistics software.

An Artificial Neural Network (ANN) is an information processing paradigm that is inspired by the way biological nervous systems, such as the brain, process information. The key element of this paradigm is the structure of the information processing system. The system is composed of a large number of highly interconnected processing elements (neurones) working in unison to solve specific problems (Neural Networks, 2015).

The most common type of artificial neural network consists of three layers of units (Neural Networks, 2015):

- Input unit represents the raw information that is fed into the network.
- Each hidden unit is determined by the activities of the input units and the weights on the connections between the input and the hidden units.
- Output units depend on the activity of the hidden units and the weights between the hidden and output units.

Dependent variable in this research is variable Class. This variable is predicted using 62 covariates (ratios defined in previous chapter). Covariates are rescaled using Standardized method. The distribution mean and standard deviation for each feature need to be calculated. Then the mean is subtracted from each covariate and values of each feature are divided by its standard deviation:

$$x' = \frac{x - \text{mean}}{s} \quad (5)$$

Where  $x$  is a starting covariate value,  $x'$  is a new covariate value,  $\text{mean}$  is a distribution mean value and  $s$  is the standard deviation of distribution.

\*Multilayer Perceptron Network.

```
MLP Class (MLEVEL=N) WITH @100178 @2730 @2731 @2754 @30116 @3050 @30117 @3150
@3197 @31116 @31117 @31136 @5054 @54117 @98177 @98193 @98222 @99177 @100177
@100179 @100180 @100193 @100194 @100195 @100208 @100222 @100223 @100224 @101177
@101222 @105177
```

```

@105178 @105179 @105180 @106177 @106178 @106180 @2753 @2831 @30100 @3196 @31100
@31101 @5053 @53117 @98178 @98208 @99193 @99222 @100209 @101178 @101193 @101223
@103178 @104178 @105194 @105209 @105222 @105223 @106179 @106222 @106223
/RESCALE COVARIATE=STANDARDIZED
/PARTITION TRAINING=7 TESTING=3 HOLDOUT=0
/ARCHITECTURE AUTOMATIC=YES (MINUNITS=1 MAXUNITS=50)
/CRITERIA TRAINING=BATCH OPTIMIZATION=SCALEDCONJUGATE
LAMBDAINITIAL=0.0000005 SIGMAINITIAL=0.00005 INTERVALCENTER=0
INTERVALOFFSET=0.5 MEMSIZE=1000
/PRINT CPS NETWORKINFO SUMMARY CLASSIFICATION SOLUTION IMPORTANCE
/PLOT NETWORK ROC GAIN LIFT PREDICTED
/SAVE PREDVAL
/STOPPINGRULES ERRORSTEPS= 1 (DATA=AUTO) TRAININGTIMER=ON (MAXTIME=15)
MAXEPOCHS=AUTO ERRORCHANGE=1.0E-4 ERRORRATIO=0.0010
/MISSING USERMISSING=EXCLUDE .

```

In order to train the neural network, 70% (689) of cases are used. The other 30% (313) are used for testing. The cases were assigned randomly. All the cases were valid and none were excluded (Table 3.4. MLP case processing summary).

Table 3.4. MLP case processing summary

		N	Percent
Sample	Training	689	68,8%
	Testing	313	31,2%
Valid		1002	100,0%
Excluded		0	
Total		1002	

The network has 62 units in the input layer. There is only one hidden layer with 8 units. Output layer has 2 units. Activation function for hidden layers is Hyperbolic tangent. This function is defined as the ratio between the hyperbolic sine and the cosine functions or expanded as the ratio of the half-difference and half-sum of two exponential functions in the points  $x$  and  $-x$  as follows (Karlik and Olgac, 2010):

$$\tanh(x) = \frac{\sinh(x)}{\cosh(x)} = \frac{e^x - e^{-x}}{e^x + e^{-x}} \quad (6)$$

Activation function for output layer is softmax (Shimodaira, 2015):

$$y_k = \frac{\exp(a_k)}{\sum_l \exp a_l}, a_k = \sum_{i=0}^d w_{ki} x_i \quad (7)$$

According to Karlik and Olgac (2010) hyperbolic tangent function has better recognition accuracy than other functions. The same results have been obtained in this research (Table 3.5. MLP information).

Table 3.5. MLP information

Hidden Layer(s)	Number of Units <sup>a</sup>		62
	Rescaling Method for Covariates		Standardized
	Number of Hidden Layers		1
	Number of Units in Hidden Layer 1 <sup>a</sup>		8
	Activation Function		Hyperbolic tangent
Output Layer	Dependent Variables	1	Manje
	Number of Units		2
	Activation Function		Softmax
	Error Function		Cross-entropy

The results of the trained neural network can be seen in Table 3.6. Trained MLP results.

Table 3.6. Trained MLP results

Sample	Observed	Predicted		
		1	2	Percent Correct
Training	1	373	68	84,6%
	2	53	195	78,6%
	Overall Percent	61,8%	38,2%	82,4%
Testing	1	164	35	82,4%
	2	31	83	72,8%
	Overall Percent	62,3%	37,7%	78,9%

# Chapter 4: Experimental Results

This chapter shows the results got after testing the algorithm on various datasets. First part of the chapter describes datasets used, and the second part of the chapter gives performance measurements.

## 4.1. Datasets

In order to create an accurate algorithm for age classification, appropriate datasets for training and testing are required. There is only one publicly available dataset that can be used for this research (Fg-net) (Lanitis, 2008) and it is described in detail. In order to develop a more accurate algorithm, a private database with facial images is created for algorithm training.

### 4.1.1. *Public Databases*

There is a large number of databases available for human age estimation research: Fg-net Aging Database (Fg-net, 2014), MORPH Database (Morph, 2014), YGA Database (Fu and Huang, 2008), WIT-DB Database (Ueki, Hayashida and Kobayashi, 2006), AI&R Asian Face Database (Fu and Zheng, 2006), Burt's Caucasian Face Database (Burt and Perrett, 1995), LHI Face Database (Yao, Yang and Zhu, 2007), HOIP Face Database (Nakano and Fukumi, 2005), Iranian Face Database (Bastanfard, Nik and Deshibi, 2007), Gallagher's Web-Collected Database (Gallagher and Chen, 2008), Ni's Web-Collected Database (Ni, Song and Yan, 2009) and PAL database (Pal database, 2014). An overview of these databases can be seen in Table 4.1. Face age databases.

Some of these databases are not appropriate for this research. YGA, WIT-DB, AI&R, and LHI database are databases of Asian subjects, and population for this research is caucasians. HOIP database has age labels distributed in 10 groups with five year intervals and Gallagher's Web-collected database has age labels in seven

categories, which is not accurate enough. Burt's Caucasian Face Database and MORPH database have subjects aged respectively, between 20 and 62 and between 16 and 77, which is not the age range interesting for this research.

The only two databases appropriate for this research are Fg-net database and Ni's web collected database.

Table 4.1. Face age databases

<b>Database name</b>	<b>No. of subjects</b>	<b>No. of images</b>	<b>Age</b>	<b>Race</b>	<b>Labels</b>
Fg-net	82	1002	0-69	Caucasoid	70 categories
MORPH Public Release	13000	55000	16-77	Caucasoid, Negroid and Mongoloid	62 categories
YGA	1600	8000	0-93	Mongoloid	-
WIT-DB	5500	12008	3-85	Mongoloid	11 categories
AI&R	17	34	22-61	Mongoloid	-
BURT'S	147	147	20-62	Caucasoid	-
LHI	8000	8000	9-89	Mongoloid	-
HOIP	300	306600	15-64	-	10 categories
IRANIAN	616	3600	2-85	Mongoloid	-
GALLAGHER'S	N/A	28231	-	-	7 categories
NI'S	-	219892	1-80	-	-
PAL	575	-	18-93	Caucasoid, Negroid and Mongoloid	-

Only Fg-net database will be used for algorithm testing because the majority of state of the art research use this database (Table 4.2. Face age database by number of papers). Ni's database will not be used for testing because there are no results to compare the algorithm with.



Table 4.2. Face age databases by number of papers

<b>Database</b>	<b>No. of papers</b>
Fg-net	60
MORPH	16
PAL	9
Private databases	17
Other	20

The Fg-net (Face and Gesture Recognition Research Network) ageing database (Fg-net, 2014) is a publicly available ageing database that has been extensively used for evaluation by researchers. The database is composed of 1,002 images of 82 subjects. There are 607 images of male subjects and 395 images of female subjects from 34 female subjects and 48 male subjects (Table 4.3. Subjects and images by sex in Fg-net database) in the age range 0–69 years (Ricanek et al.).

Table 4.3. Subjects and images by sex in Fg-net database

	<b>Number of subjects</b>	<b>Number of images</b>
<b>Female</b>	34	395
<b>Male</b>	48	607
<b>Total</b>	82	1002

The database predominantly includes images in the age range 0–18 years. The images are manually annotated with 68-landmark features and include information on image size, age, gender, presence of facial hair and eyeglasses, horizontal pose, and vertical pose. Many of the images are scanned from photographs and these images exhibit common noise errors associated with old photographs (Ricanek et al.).

Most subjects provided from 10 to 13 images of themselves, 6 subjects provided less than 10 images, and 20 subjects provided more than 13 images (Table 4.4. Images per person in Fg-net database).

Table 4.4. Images per person in Fg-net database

	<b>6</b>	<b>8</b>	<b>9</b>	<b>10</b>	<b>11</b>	<b>12</b>	<b>13</b>	<b>14</b>	<b>15</b>	<b>16</b>	<b>18</b>
<b>Male</b>	1	3	1	7	8	7	11	6	1	3	0
<b>Female</b>	0	0	1	3	7	7	6	3	3	3	1
<b>Total</b>	1	3	2	10	15	14	17	9	4	6	1

Regarding number of images per age, the largest number of images is of age of 18, the smallest number is of age 46 and above. Some ages don't have images associated with them (age 56, 57 59, 64, 65, 66 and 68) (Table 4.5. Images per age in Fg-net database).

Table 4.5. Images per age in Fg-net database

<b>Age</b>	<b>Number of images</b>	<b>Age</b>	<b>Number of images</b>	<b>Age</b>	<b>Number of images</b>	<b>Age</b>	<b>Number of images</b>
<b>0</b>	43	<b>16</b>	37	<b>32</b>	4	<b>48</b>	3
<b>1</b>	27	<b>17</b>	28	<b>33</b>	9	<b>49</b>	3
<b>2</b>	39	<b>18</b>	47	<b>34</b>	8	<b>50</b>	2
<b>3</b>	42	<b>19</b>	23	<b>35</b>	11	<b>51</b>	3
<b>4</b>	42	<b>20</b>	20	<b>36</b>	8	<b>52</b>	3
<b>5</b>	40	<b>21</b>	16	<b>37</b>	3	<b>53</b>	2
<b>6</b>	41	<b>22</b>	17	<b>38</b>	5	<b>54</b>	2
<b>7</b>	41	<b>23</b>	22	<b>39</b>	6	<b>55</b>	2
<b>8</b>	31	<b>24</b>	9	<b>40</b>	9	<b>58</b>	1
<b>9</b>	25	<b>25</b>	17	<b>41</b>	6	<b>60</b>	1
<b>10</b>	40	<b>26</b>	11	<b>42</b>	5	<b>61</b>	3
<b>11</b>	33	<b>27</b>	11	<b>43</b>	4	<b>62</b>	1
<b>12</b>	37	<b>28</b>	12	<b>44</b>	4	<b>63</b>	1
<b>13</b>	32	<b>29</b>	9	<b>45</b>	7	<b>67</b>	1
<b>14</b>	32	<b>30</b>	19	<b>46</b>	3	<b>69</b>	1
<b>15</b>	30	<b>31</b>	6	<b>47</b>	2		

#### 4.1.2. Private Database

Apart from the databases described in the previous chapter, private database for this research has been created. This database will be used for testing of the algorithm.

Since personal data is collected and used in this research, collection and processing of such data must be in accordance with the Croatian Law on Personal Data Protection. Some of the basic concepts recognized by this Law are (Narodne Novine, 2013):

- Personal information is any information relating to an identified natural person or a natural person who can be identified (respondent); a person who can be identified is the person whose identity can be determined directly or indirectly, in particular on the basis of one or more factors specific to his/her physical, physiological, mental, economic, cultural or social identity.
- Personal data processing is any operation or set of operations which is performed upon personal data, whether or not by automatic means, such as collection, recording, organization, storage, adaptation or alteration, retrieval, consultation, use, disclosure by transmission, dissemination or otherwise made available, alignment or combination, blocking, erasure or destruction, and the implementation of logical, mathematical and other operations on the data.
- Personal data collection is each set of personal data available by specific criteria, whether centralized, decentralized or dispersed on a functional or geographical basis and irrespective of whether it is contained in computer databases or other technical aids or manually.
- Personal data collection director is natural or legal person, public or other body which determines the purposes and means of processing personal data. Once the purpose and method of treatment is prescribed by law, the same law also determines the personal data collection director.
- User is a natural or legal person, public or other body which may use personal data to perform regular activities within its statutory activity.
- Subjects consent is freely given and specific manifestation of the will of the subjects with which he/she expresses consent to the processing of their personal data for specific purposes.

During data collection, respondent was aware of the fact that he/she is giving personal information, aware of the purpose for which the information is collected, and that they can withdraw their data at any time.

Respondent received a Privacy policy for review, which describes the duration of the Privacy policy, all the data collected, the purpose for which the data is collected, and whom to contact in case of any questions. In addition to this policy, all participants signed a statement of consent, with which they give their consent to use their personal data for this research, and confirm that they received for review the Privacy policy mentioned earlier. Since this research collects personal data of minors, their parents/guardians gave consent for the use of these data.

Images were collected during two years. Subjects were asked to provide images of themselves from childhood to adulthood. Every subject had to provide a minimum of 4 images. Images of all subjects have been collect according to Privacy policy described earlier, and all subjects signed the Declaration of conformity with which they stated that their images may be used for this research.

The basic information collected is shown in Table 4.6. Information collected for the private database.

Table 4.6. Information collected for the private database

<b>Field</b>	<b>Field definition</b>
ID	Identifier of the subject
IM_ID	Image identifier
IM_AGE	Age of subject in image
DOB	Date of birth
DOA	Date of Acquisition
Gender	Male or female

During data collection, images of 287 subjects have been collected, 151 female and 136 male subjects (Table 4.7. Subjects per sex collected for the private database). In total, 1655 images have been collected.

Table 4.7. Subjects per sex collected for the private database

	<b>Number of subjects</b>
<b>Female</b>	151
<b>Male</b>	136
<b>Total</b>	287

The subjects were asked to provide a minimum of four images. Most of the subjects provided five images, but some of them provided more than eleven (Table 4.8. Images per person collected for the private database). Only six subjects provided a minimum of four images.

Table 4.8. Images per person collected for the private database

	<b>4</b>	<b>5</b>	<b>6</b>	<b>7</b>	<b>8</b>	<b>9</b>	<b>10</b>	<b>11+</b>
<b>Male</b>	6	101	9	12	5	2	1	0
<b>Female</b>	0	112	15	11	3	2	7	1
<b>Total</b>	6	213	24	33	8	4	8	1

Regarding number of images per age, the largest number of images is of age of twenty, the smallest number is of age 21 and above. All other age have similar number of images (Table 4.9. Images per age collected for the private database).

Table 4.9. Images per age collected for the private database

<b>Age</b>	<b>Number of images</b>	<b>Age</b>	<b>Number of images</b>	<b>Age</b>	<b>Number of images</b>
0	21	9	67	18	87
1	81	10	77	19	74
2	131	11	48	20	136
3	78	12	87	21	1
4	56	13	49	22	8
5	73	14	93	23	3
6	84	15	56	24	2
7	99	16	113	25	4
8	55	17	72		

All of the images provided cannot be used for age classification and estimation. Some of the images are of low quality, some have face images from different angles and some have bad lighting. So selection of these images needs to be done. The next step was to crop only faces from the images. After that, images with at least 100 pixels width and height were selected. After this selection 867 images from 242 subjects are left and 788 images have been left out (Table 4.10. Subjects per sex left in the private database after preprocessing).

Table 4.10. Subjects per sex left in the private database after preprocessing

	<b>Number of subjects left</b>
<b>Female</b>	121
<b>Male</b>	121
<b>Total</b>	242

Regarding number of images per age, the largest number of images is still of age of twenty and the smallest number is of age 21 and above (Table 4.11. Images per age left in the private database after preprocessing).

Table 4.11. Images per age left in the private database after preprocessing

<b>Age</b>	<b>Number of images</b>	<b>Age</b>	<b>Number of images</b>	<b>Age</b>	<b>Number of images</b>
0	11	9	43	18	50
1	54	10	54	19	43
2	51	11	26	20	65
3	47	12	28	21	1
4	25	13	15	22	3
5	47	14	41	23	0
6	40	15	43	24	0
7	59	16	59	25	2
8	31	17	29		

In order to apply the algorithm to this database, positions of characteristic points need to be determined. The positions are selected manually using a script explained earlier.

## 4.2. Performance Measurement

The performance is evaluated in two parts. First, the performance evaluation of classification algorithm is done. Next, the performance evaluation of age estimation algorithm is done. Fg-net database and private database are used for testing.

### 4.2.1. Age Classification

In order to assess the performance of the classifier different measures are used. Confusion matrix will be created and accuracy, precision, recall and specificity will be

calculated. Confusion matrix (Kohavi and Provost, 1998) contains information about actual and predicted classifications done by a classification system. Performance of such systems is commonly evaluated using the data in the matrix. The confusion matrix shows how algorithm makes predictions. The rows correspond to the actual class of the data. The columns correspond to the predicted values. The value of each of element in the matrix is the number of predictions made with the class corresponding to the column for examples with the correct value as represented by the row (Table 4.12. General confusion matrix (Lecture Notes, 2015)). The diagonal elements show the number of correct classifications made for each class, and the off-diagonal elements show the errors made (Lecture Notes, 2015).

Table 4.12. General confusion matrix (Lecture Notes, 2015)

		Predicted	
		Class 1	Class 2
Actual	Class 1	TP	FN
	Class 2	FP	TN

True positives (TP) is the number of correct predictions that an instance is positive. True negative (TN) is the number of correct predictions that an instance is negative. False positives (FP) is the number of incorrect predictions that an instance is positive. False negatives (FN) is the number of incorrect predictions that an instance is negative (Lecture Notes, 2015).

Accuracy is the proportion of the total number of predictions that were correct (Lecture Notes, 2015):

$$Accuracy = \frac{TP+TN}{N} * 100\% \quad (8)$$

It is actually a measure of how often the classifier is correct.

Precision is the proportion of positive cases that were correctly identified:

$$Precision = \frac{TP}{TP+FP} * 100\% \quad (9)$$

Recall is the proportion of actual positive cases which are correctly identified (Lecture Notes, 2015):

$$Recall = \frac{TP}{TP+FN} * 100\% \quad (10)$$

Specificity is the proportion of negative cases that were correctly identified (Lecture Notes, 2015):

$$Specificity = \frac{TN}{FP+TN} * 100\% \quad (11)$$

If the algorithm is applied to samples from Fg-net database, confusion matrix is created based on results of the algorithm (Appendix A) and is as shown in Table 4.13. Confusion matrix for the new algorithm tested on the Fg-net database.

Table 4.13. Confusion matrix for the new algorithm tested on the Fg-net database

		Predicted	
		Child	Adult
Actual	Child	537	103
	Adult	84	278

The child in this case is defined as a person from age of 0 to age 17. A person from age of 18 and above is defined as an adult.

The value of TP is 537, TN is 278, FP is 84 and FN is 103. Using these values, accuracy, precision, recall and specificity are calculated.

$$Accuracy = \frac{TP + TN}{N} * 100\% = \frac{537 + 278}{1002} * 100\% = 81.34\%$$

$$Precision = \frac{TP}{TP + FP} * 100\% = \frac{537}{537 + 84} * 100\% = 86.47\%$$

$$Recall = \frac{TP}{TP + FN} * 100\% = \frac{537}{537 + 103} * 100\% = 83.91\%$$

$$Specificity = \frac{TN}{FP + TN} * 100\% = \frac{278}{84 + 278} * 100\% = 76.80\%$$



The overall accuracy is **81.34%** which confirms the first hypothesis:

**HYPOTHESIS 1**

The newly developed algorithm distinguishes children from adults based on facial anthropometric ratios with an accuracy of more than 80% when used on the publicly available Fg-net database.

Table 4.14. Classification accuracy of the new algorithm by age tested on the Fg-net database gives a detailed accuracy for each age. The accuracy decreases when nearing the age 17 which is a threshold for classification. This is logical, because 17 is the threshold age, and closer the age of a person gets to the threshold, the accuracy decreases.

Table 4.14. Classification accuracy of the new algorithm by age tested on the Fg-net database

Age	No. of photos	Correctly classified	Wrongly classified	Accuracy (%)
0	43	43	0	100.00
1	27	26	1	96.30
2	39	38	1	97.44
3	42	42	0	100.00
4	42	36	6	85.71
5	40	39	1	97.50
6	41	40	1	97.56
7	41	38	3	92.68
8	31	29	2	93.55
9	25	20	5	80.00
10	40	36	4	90.00
11	33	28	5	84.85
12	37	30	7	81.08
13	32	22	10	68.75
14	32	23	9	71.88
15	30	19	11	63.33
16	37	15	22	40.54
17	28	13	15	46.43
18	47	36	11	76.60
19	23	17	6	73.91
20	20	13	7	65.00
21	16	13	3	81.25

22	17	11	6	64.71
23	22	16	6	72.73
24	9	8	1	88.89
25	17	13	4	76.47
26	11	8	3	72.73
27	11	8	3	72.73
28	12	11	1	91.67
29	9	9	0	100.00
30	19	14	5	73.68
31	6	5	1	83.33
32	4	3	1	75.00
33	9	5	4	55.56
34	8	6	2	75.00
35	11	10	1	90.91
36	8	6	2	75.00
37	3	2	1	66.67
38	5	5	0	100.00
39	6	4	2	66.67
40	9	7	2	77.78
41	6	4	2	66.67
42	5	3	2	60.00
43	4	3	1	75.00
44	4	4	0	100.00
45	7	5	2	71.43
46	3	1	2	33.33
47	2	1	1	50.00
48	3	2	1	66.67
49	3	3	0	100.00
50	2	2	0	100.00
51	3	3	0	100.00
52	3	3	0	100.00
53	2	1	1	50.00
54	2	2	0	100.00
55	2	2	0	100.00
58	1	1	0	100.00
60	1	1	0	100.00
61	3	3	0	100.00
62	1	1	0	100.00
63	1	1	0	100.00
67	1	1	0	100.00
69	1	1	0	100.00

### 4.2.2. Age Estimation

One of the important aspects of age estimation problem is finding the best metric for assessing the performance of age estimation algorithm. Two metrics most often used in literature for quantifying the performance of age estimation algorithms are mean absolute error (MAE) and cumulative score (CS) (Geng, Zhou and Smith-Miles, 2007).

The MAE is defined as the average of the absolute errors between the estimated age labels and the chronological age labels (Fu, Guo and Huang, 2010)

$$MAE = \frac{SAE}{N} = \frac{\sum_{i=1}^N |x_i - \hat{x}_i|}{N} \quad (12)$$

where  $x_i$  is the chronological age,  $\hat{x}_i$  is the estimated age,  $SAE$  is the sum of the absolute errors and  $N$  is the number of test images (Hamilton, 1994).

MAE has two other variations: MAE per age and MAE per decade. Both of these variations will be used in this research. MAE per age measures the mean absolute error at each age, and MAE per decade computes mean absolute error for every ten years (Guo, 2012).

The CS metric is defined as the proportion of test images such that the absolute error is not higher than an integer  $j$ :

$$CS(j) = \frac{N_{e \leq j}}{N_x} * 100\% \quad (13)$$

where  $N_{e \leq j}$  is the number of test images on which the absolute error in age estimation is within  $j$  years (Turaga, Biswas and Chellapa, 2010), (Chen et al., 2011).

#### **New algorithm tested on Fg-net database**

When algorithm is used on Fg-net database the general MAE is 6.67. Other than general MAE measure, MAE per age and MAE per decade are also important measures. Table 4.15. MAE per age results of the new algorithm tested on the Fg-net database gives an overview of MAE per age. The results of MAE per age measure are consistent

with theories given in literature that say that anthropometric ratios are more accurate for younger ages. All the algorithm results for Fg-net database can be seen in Appendix A.

Table 4.15. MAE per age results of the new algorithm tested on the Fg-net database

Age	No.of images	MAE per age	Age	No.of images	MAE per age
0	43	3.81	32	4	10.00
1	27	3.11	33	9	12.89
2	39	3.82	34	8	14.63
3	42	3.62	35	11	12.00
4	42	6.05	36	8	13.25
5	40	4.95	37	3	18.33
6	41	4.37	38	5	14.80
7	41	4.46	39	6	18.33
8	31	4.52	40	9	17.44
9	25	4.72	41	6	22.00
10	40	4.75	42	5	18.00
11	33	4.94	43	4	17.50
12	37	5.30	44	4	19.75
13	32	5.31	45	7	25.29
14	32	5.31	46	3	24.67
15	30	4.90	47	2	20.00
16	37	5.89	48	3	26.33
17	28	4.43	49	3	25.67
18	47	4.91	50	2	27.50
19	23	5.57	51	3	26.00
20	20	4.15	52	3	27.67
21	16	3.56	53	2	30.00
22	17	5.41	54	2	32.50
23	22	4.64	55	2	29.00
24	9	3.00	58	1	29.00
25	17	3.94	60	1	39.00
26	11	5.00	61	3	34.00
27	11	6.91	62	1	40.00
28	12	5.33	63	1	36.00
29	9	6.56	67	1	38.00
30	19	8.95	69	1	36.00
31	6	5.67			

An overview of MAE per decade is given in Table 4.16. MAE per decade results of the new algorithm tested on the Fg-net database. The acceptable MAE per decade is for first three decades, whereas the MAE per decade for ages 30 and above is too large.

Table 4.16. MAE per decade results of the new algorithm tested on the Fg-net database

<b>Age range</b>	<b>No. of images</b>	<b>MAE per decade</b>
0-9	371	4.37
10-19	339	5.12
20-29	144	4.74
30-39	79	12.08
40-49	46	21.20
50-59	15	28.53
60-69	8	36.38

The other measure used in most of the literature on age estimation is cumulative score.

Cumulative score for error levels of 0 to 20 is shown in Table 4.17. CS results of the new algorithm tested on the Fg-net database and Figure 4.10. Cumulative score curve of the new algorithm tested on the Fg-net database

Table 4.17. CS results of the new algorithm tested on the Fg-net database

<b>Error level</b>	<b>No. of samples</b>	<b>Cumulative score (CS)</b>	<b>Error level</b>	<b>No. of samples</b>	<b>Cumulative score (CS)</b>
0	66	6.59	11	26	
1	116	18.16	12	18	
2	115		13	16	
3	104		14	15	
4	90		15	12	90.12
5	91	58.08	16	11	
6	68		17	10	
7	50		18	7	
8	41		19	9	
9	36		20	4	94.21
10	39	81.44			

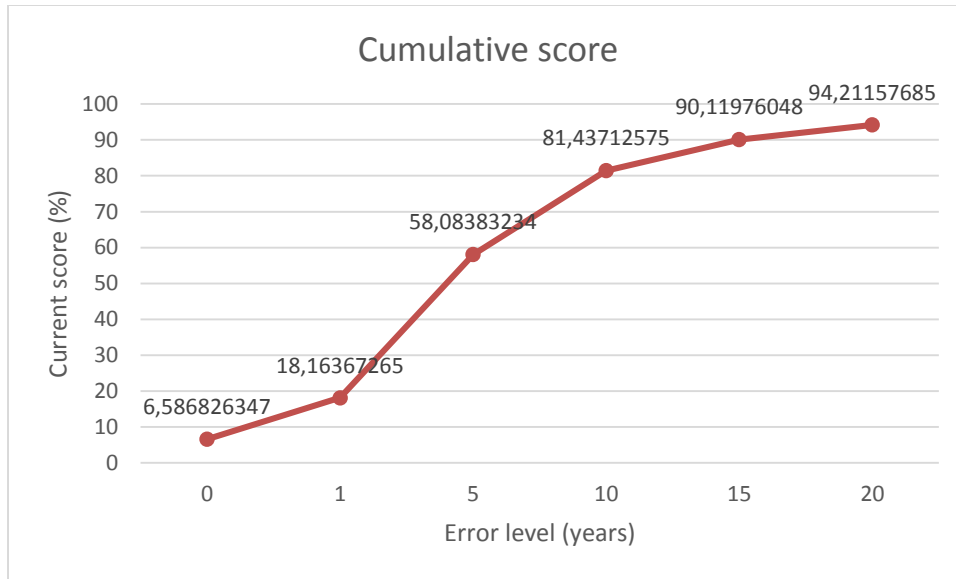


Figure 4.10. Cumulative score curve of the new algorithm tested on the Fg-net database

These results will be compared with the results of age estimation using an anthropometric model on Fg-netdatabase.

#### Anthropometric model tested on Fg-net database

In order to compare the existing algorithm with the anthropometric model, the anthropometric model has to be evaluated on the Fg-net database.

The six ratios used in anthropometric model are different ratios than those used in the new algorithm (Table 4.18. Face ratios used in anthropometric model).

Table 4.18. Face ratios used in anthropometric model

Ratio name	Ratio formula
Ratio 1	LEYE-REYE/EYE-NOSE
Ratio 2	LEYE-REYE/EYE-LIP
Ratio 3	EYE-NOSE/EYE-CHIN
Ratio 4	EYE-NOSE/EYE-LIP
Ratio 5	LEYE-REYE/EYE-CHIN
Ratio 6	THEAD-CHIN/EYE-CHIN

The general MAE for anthropometric model is **7.03**. Compared with MAE for the new algorithm where MAE is **6.67**, it can be seen that ratios in the new algorithm give better results. All the anthropometric model results for Fg-net database can be seen in Appendix B.

Table 4.19. Comparison of MAE per age results of the new algorithm and anthropometric model tested on the Fg-net database shows the values of MAE per age of anthropometric model (AM) in comparison to MAE per age of the new algorithm. In most cases, MAE per age of the new algorithm is better than MAE per age of AM. The cases where MAE per age of AM is better than MAE per age of the new algorithm are for age of 45 and above, where the number of samples is small.

Table 4.19. Comparison of MAE per age results of the new algorithm and anthropometric model tested on the Fg-net database

Age	No.of images	MAE new algorithm	MAE AM	Age	No.of images	MAE new algorithm	MAE AM
0	43	3.81	4.02	32	4	10.00	19.00
1	27	3.11	5.44	33	9	12.89	19.22
2	39	3.82	6.92	34	8	14.63	20.25
3	42	3.62	6.48	35	11	12.00	24.82
4	42	6.05	10.48	36	8	13.25	24.13
5	40	4.95	10.03	37	3	18.33	20.67
6	41	4.37	10.02	38	5	14.80	23.60
7	41	4.46	12.56	39	6	18.33	21.50
8	31	4.52	11.00	40	9	17.44	25.78
9	25	4.72	14.60	41	6	22.00	23.00
10	40	4.75	16.00	42	5	18.00	22.40
11	33	4.94	16.09	43	4	17.50	23.75
12	37	5.30	16.16	44	4	19.75	21.75
13	32	5.31	17.06	45	7	25.29	22.14
14	32	5.31	18.78	46	3	24.67	21.00
15	30	4.90	19.30	47	2	20.00	19.50
16	37	5.89	20.00	48	3	26.33	22.00
17	28	4.43	19.50	49	3	25.67	24.67
18	47	4.91	19.98	50	2	27.50	19.50
19	23	5.57	20.87	51	3	26.00	27.00
20	20	4.15	20.55	52	3	27.67	22.00

21	16	3.56	20.81	53	2	30.00	22.50
22	17	5.41	19.47	54	2	32.50	15.00
23	22	4.64	22.50	55	2	29.00	25.50
24	9	3.00	22.33	58	1	29.00	29.00
25	17	3.94	22.41	60	1	39.00	39.00
26	11	5.00	22.00	61	3	34.00	23.67
27	11	6.91	20.45	62	1	40.00	40.00
28	12	5.33	20.67	63	1	36.00	36.00
29	9	6.56	26.33	67	1	38.00	38.00
30	19	8.95	22.53	69	1	36.00	36.00
31	6	5.67	24.67				

In MAE per decade table, the MAE per decade of anthropometric model is better in cases where there is a small number of samples (Table 4.20. Comparison of MAE per decade results of the new algorithm and anthropometric model tested on the Fg-net database).

Table 4.20. Comparison of MAE per decade results of the new algorithm and anthropometric model tested on the Fg-net database

Age range	No. of images	MAE new algorithm	MAE AM
0-9	371	4.37	8.99
10-19	339	5.12	18.29
20-29	144	4.74	21.56
30-39	79	12.08	22.30
40-49	46	21.20	23.07
50-59	15	28.53	22.47
60-69	8	36.38	25.38

If the cumulative score measure for both algorithms is compared, the cumulative score of the new algorithm is better on every error level. Most importantly, cumulative score for error level 0 is **6.59** for the new algorithm and **0** for anthropometric model. This means that anthropometric model predicts the correct age in 0 cases and the new algorithm predicts the correct age in 66 cases. The comparison of cumulative score curves can be seen in Figure 4.11. Comparison of cumulative score curves of the new algorithm and anthropometric model tested on the Fg-net database.



Table 4.21. Comparison of CS results of the new algorithm and anthropometric model tested on the Fg-net database

Error level	No. of samples New algorithm	Cumulative score (CS) new algorithm	No. of samples AM	Cumulative score (CS) AM
0	66	6.59	0	0.00
1	182	18.16	1	0.10
5	582	58.08	155	15.47
10	816	81.44	289	28.84
15	903	90.12	439	43.81
20	944	94.21	653	65.17

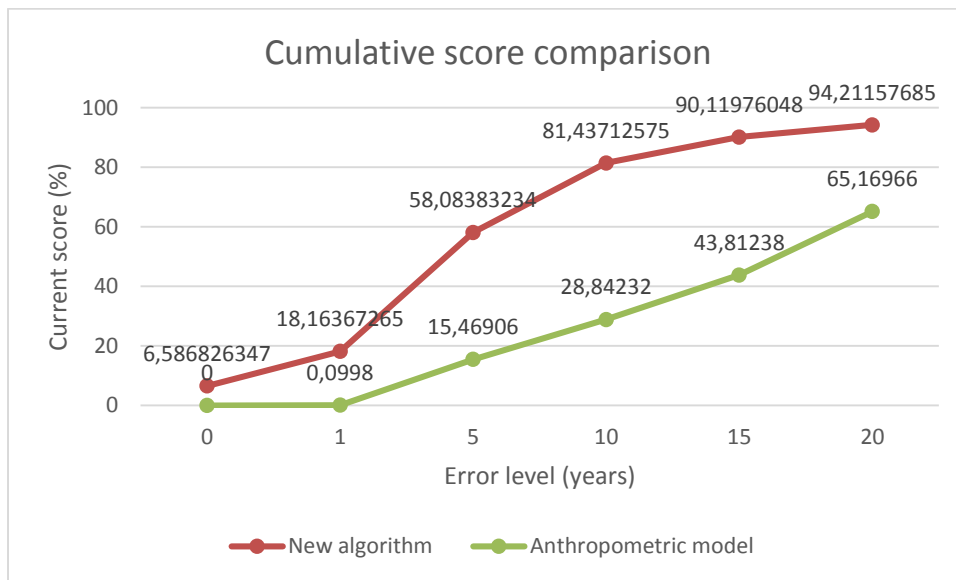


Figure 4.11. Comparison of cumulative score curves of the new algorithm and anthropometric model tested on the Fg-net database

These results confirm the second hypothesis:

**HYPOTHESIS 2**

Usage of different facial anthropometric ratios than those used in existing anthropometric model, increases the accuracy of the algorithm when used for age estimation.

## Private database

As addition to this research, a private database of images is created. If the new algorithm is applied on this database, MAE is 3.25. All the algorithm results for private database can be seen in Appendix C.

MAE per age and MAE per decade values can be seen in Table 4.22. MAE per age results of the new algorithm tested on the private database and Table 4.23. MAE per decade results of the new algorithm tested on the private database. The results are similar to results where algorithm was tested on Fg-net database.

Table 4.22. MAE per age results of the new algorithm tested on the private database

Age	No.of images	MAE	Age	No.of images	MAE
0	11	3.55	13	15	2.00
1	54	2.33	14	41	2.10
2	51	2.12	15	43	2.35
3	47	3.13	16	59	2.36
4	25	3.08	17	29	2.86
5	47	4.19	18	50	3.94
6	40	3.53	19	43	4.84
7	59	3.71	20	65	5.25
8	31	3.52	21	1	7.00
9	43	2.37	22	3	7.00
10	54	3.07	23	0	-
11	26	3.12	24	0	-
12	28	2.52	25	2	9.50

Table 4.23. MAE per decade results of the new algorithm tested on the private database

Age range	No. of images	MAE
0-9	408	3.10
10-19	388	2.99
20-29	71	5.46

The cumulative score values are listed in Table 4.24. CS results of the new algorithm tested on the private database. These values are better than values got

when algorithm was tested on the Fg-net database. The reason for that is that the private database was preprocessed, and all images from different angles and with bad resolution were excluded from the database. Also, the private database has images from age 0 to 25 which makes estimation and classification easier. The resulting curve can be seen in Figure 4.12. Cumulative score curve of the new algorithm tested on the private database.

Table 4.24. CS results of the new algorithm tested on the private database

Error level	No. of samples	Cumulative score (CS)
0	93	10.73
1	262	30.22
5	700	80.74
10	859	99.08
15	867	100.00
20	867	100.00

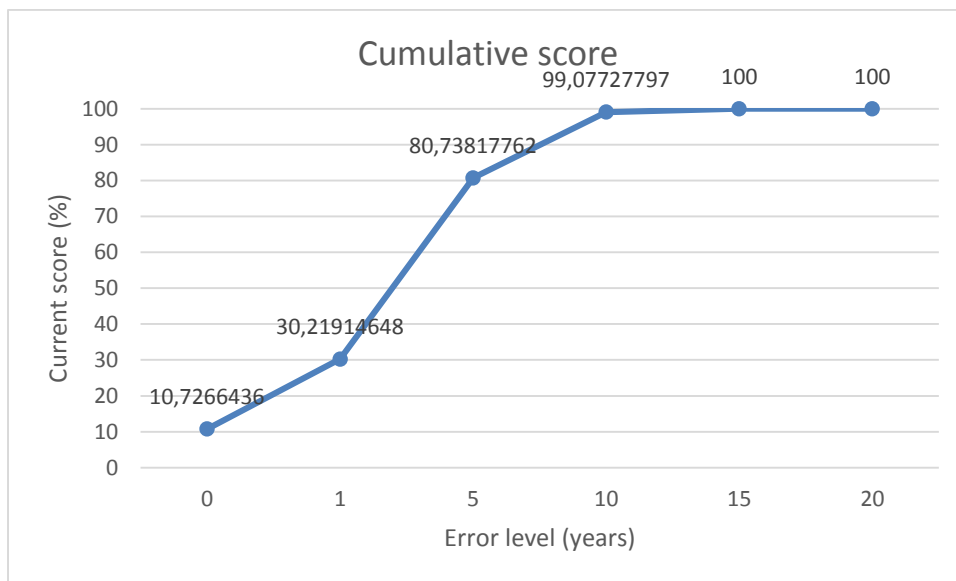


Figure 4.12. Cumulative score curve of the new algorithm tested on the private database

### 4.3. Comparison with State of the Art Algorithms

In order to position this algorithm in state of the art research, comparison with existing age classification and age estimation algorithms is done. Table 4.25. Current research results for age classification shows the current research results for age classification.

Table 4.25. Current research results for age classification

Algorithm	Database used	Classes	Accuracy
Mohan, Kumar and Krishna (2010)	Part of Fg-net and 500 face images from Google images	16-25, 26-35, 36-45, 46-55, 56-65, 66-75, 76-85	Fg-net– 94.1% Google images – 90.8%
Kwon and Lobo (1999)	47 images	Babies, young adults and senior adults	Not reported
Hornng, Lee and Chen (2001)	230 images	0-2, 3-39, 40-59, 60+	81.58%
Nithyashri and Kulanthaivel (2012)	Fg-net	0-12, 13-18, 19-59, 60+	94.28%
Zhou, Miller and Zhang (2011)	Fg-net MORPH	Youths and adults	76% 86%
Zhan, Li and Ogunbona (2011)	Fg-net MORPH	4 groups (0-19, 20-29, 30-39, 40-69)	60.9%
		2 groups (0-10, 11+)	87.1%
		2 groups (0-14, 15+)	85.9%
		2 groups (0-18, 19+)	85.3%
		2 groups (0-20, 21+)	84.0%
		2 groups (0-30, 31+)	86.3%
Qi and Zhang (2009)	7443 images	Kids and adults	90.46%
Hajizadeh and Ebrahimnezhad (2011)	Iranian Face Database	0-15, 16-30, 31-50, 50+	87.03%
Li et al. (2012)	5080 images from	0-2, 3-7, 8-12, 13-	48.5%

	Flickr	19, 20-36, 37-65, 66+	
Kalamani and Balasubramanie (2006)	250 images	0-2, 3-12, 13-24, 25-40, 41-55, 56+	95%
Shen and Ji (2008)	179 images	Baby and adult	49.72%
Ramesha, Raja and Patnaik (2010)	58 images	0-30, 30-40, 40+	89.65%
Gunay and Nabiyevev (2008)	FERET +350 images	10+-5, 20+-5, 30+-5, 40+-5, 50+-5, 60+-5	80%

As it can be seen from Table 4.25. Current research results for age classification, none of the algorithms divide samples in children (age 0 to 17) and adults (age 18 and above). The most similar algorithms that divide samples in two classes and have testing results on Fg-net database are listed in Table 4.26. Research results for age classification comparable to this research. The most accurate algorithm is by Zhan and Ogunbona (2011) where the closest class definition is for class 1 (age 0 to 18) and class 2 (age 19 and above). The accuracy of that algorithm is 85.30%. If the algorithm from this research is tested on the same classes, its accuracy is 79.90%. But if the algorithm from this research is tested on the four classes defined in algorithm by Zhan and Ogunbona, the algorithm from this research has an accuracy of 71.80%, as opposed to Zhan and Ogunbone algorithm accuracy which is 60.90%.

Table 4.26. Research results for age classification comparable to this research

Algorithm	Database used	Classes	Accuracy
Zhou, Miller and Zhang (2011)	Fg-net	Youths and adults	76%
Zhan, Li and Ogunbona (2011)	Fg-net MORPH	4 groups (0-19, 20-29, 30-39, 40-69)	60.9%
		2 groups (0-10, 11+)	87.1%
		2 groups (0-14, 15+)	85.9%
		2 groups (0-18, 19+)	85.3%
		2 groups (0-20,	84.0%

		21+) 2 groups (0-30, 31+)	86.3%
--	--	---------------------------------	-------

If the algorithm is tested for age estimation, the result is MAE of 6.67, and CS(0) of 6.59%, CS(1) of 18.16%, CS(5) of 58.08383234%, CS(10) of 81.44%, CS(15) of 90.12% and CS(20) of 94.21%.

The MAE and CS results of the state of the art algorithms can be seen in Table 4.27. Current research results for age estimation.

Table 4.27. Current research results for age estimation

Algorithm	Abbreviation	MAE	CS (1)	CS (5)	CS (10)
El Dib and Saban (2010)	EBIF	3.17	58	82	90
Lian et al. (2011)	MTGLOH	3.44	20	78	97
Chao, Liu and Ding (2013)	LSL-AOR	4.11	-	-	-
Luu et al. (2011)	CAM	4.12	23	74	90
Weng et al. (2012)	MFOR	4.25	36	75	88
Li, Wang and Zhang (2012)	Weighte OHRanked	4.32	30	74	90
Luu et al. (2009)	HIE	4.33	-	-	-
Kohli, Prakash and Gupta (2011)	ECDC	4.35	-	-	-
Gao (2012)	CMTSVR	4.37	34	76	90
Chang, Chen and Hung (2011)	OHRank	4.48	38	74	88
Li et al. (2012)	LDMR	4.51	-	-	-
Hu et al. (2013)	LAGF	4.54	41	75	88
Choi et al. (2011)	HC	4.66	33	73	87
Chen et al. (2013)	CA	4.67	-	75	-
Duong et al. (2011)	GLFF	4.74	-	-	-
Yin and Geng (2012)	CPNN	4.76	33	75	88
Guo et al. (2009)	BIF	4.77	20	68	90
Li et al. (2012)	PLO	4.82	33	72	92
Zhang and Yeung (2010)	MTWGP	4.83	10	34	54
Qin et al. (2007)	MHR	4.87	30	64	82
Xiao et al. (2009)	mKNN	4.93	25	75	85
Zhang and Yeung (2010)	WGP	4.95	31	72	88
Guo et al. (2008)	PFA	4.97	28	75	88

Luo et al. (2011)	ML-SVM+BIF	5.04	-	-	-
Kilinc and Akgul (2013)	OAG	5.05	-	-	-
Guo et al. (2008)	LARR	5.07	26	68	88
Long (2009)	Metric Learning + GPR	5.08	20	67	87
Ylioinas et al. (2013)	LBP KDE	5.09	-	-	-
Zhang (2012)	TP	5.23	28	68	88
Chang, Chen and Hung (2010)	RED-SVM	5.24	26	60	78
Yan et al. (2007)	BM	5.33	18	64	85
Yan et al. (2007)	RUN2	5.33	19	65	88
Geng and Smith-Miles (2009)	MSA	5.36	-	-	-
Luo et al. (2011)	ML-SVM+LGBP	5.37	-	-	-
Zhang and Yeung (2010)	GP	5.39	26	64	88
Selvi and Vani (2011)	MPCA	5.41	-	-	-
Kou, Du and Zhai (2012)	Global+Local	5.72	-	-	-
Luo et al. (2011)	ML-SVM+PCA	5.73	-	-	-
Lu and Tan (2012)	FSTI	5.75	14	58	84
Yan et al. (2007)	RUN1	5.78	26	68	86
Guo et al. (2008)	SVR	5.91	22	69	89
Suo et al. (2008)	AO graph	5.97	-	-	-
Geng, Zhou and Smith-Miles (2007)	KAGES	6.18	28	63	80
Gunay and Nabyev (2013)	Radon	6.18	-	-	-
Lanitis, Draganova and Christodoulou (2004)	QM	6.55	13	49	76
Luu et al. (2011)	AAM	6.77	-	-	-
Geng, Zhou and Smith-Miles (2007)	AGES	6.77	26	64	84
Ju and Wang (2009)	LFR	6.85	-	-	-
Lanitis, Draganova and Christodoulou (2004)	MLP	6.98	9	32	59
Dahlan, Mashohor, and Mumtazah (2013)	SGF	7.15	-	-	-
Guo et al. (2008)	SVM	7.25	28	62	78

Zhai, Qing and Ji-Xiang (2010)	INMF	7.26	12	53	78
Lanitis, Taylor and (1999)	WAS	8.06	10	40	78
Geng, Zhou and Zhang (2006)	HumanA	8.13	-	-	-
Ju and Wang (2009)	C4.5	9.34	18	48	68
Ju and Wang (2009)	BP	11.85	12	34	56
Lanitis, Draganova and Christodoulou (2004)	AAS	14.83	8	35	52

If the algorithms are compared by MAE, there are many algorithm that yield better results than the algorithm from this research (Table 4.28. Comparison of state of the art research results for age estimation with the new algorithm results), but the difference is that they all take into consideration not only facial anthropometry, but also wrinkles and skin changes, all of which can be changed with a little makeup or corrective surgery.

Table 4.28. Comparison of state of the art research results for age estimation with the new algorithm results

Abbreviation	MAE	Abbreviation	MAE
EBIF	3.17	RED-SVM	5.24
MTGLOH	3.44	BM	5.33
LSL-AOR	4.11	RUN2	5.33
CAM	4.12	MSA	5.36
MFOR	4.25	ML-SVM+LGBP	5.37
Weighte OHRanked	4.32	GP	5.39
HIE	4.33	MPCA	5.41
ECDC	4.35	Global+Local	5.72
CMTSVR	4.37	ML-SVM+PCA	5.73
OHRank	4.48	FSTI	5.75
LDMR	4.51	RUN1	5.78
LAGF	4.54	SVR	5.91
HC	4.66	AO graph	5.97
CA	4.67	KAGES	6.18
GLFF	4.74	Radon	6.18
CPNN	4.76	QM	6.55
BIF	4.77	New algorithm	6.67
PLO	4.82	AAM	6.77



MTWGP	4.83
MHR	4.87
mKNN	4.93
WGP	4.95
PFA	4.97
ML-SVM+BIF	5.04
OAG	5.05
LARR	5.07
Metric Learning + GPR	5.08
LBPKDE	5.09
TP	5.23

AGES	6.77
LFR	6.85
MLP	6.98
SGF	7.15
SVM	7.25
INMF	7.26
WAS	8.06
HumanA	8.13
C4.5	9.34
BP	11.85
AAS	14.83

According to cumulative score values, the new algorithm falls somewhere in the middle of state of the art algorithms. The results of state of the art algorithms have been taken from published papers and have not been verified. In some of the algorithms, all images from Fg-net database haven't been used, so this increases their accuracy. The quality of some images from Fg-net database is not appropriate for computer vision, biometric recognition and age estimation (Figure 4.4. Example of image from Fg-net database not appropriate for age estimation).



Figure 4.4. Example of images from Fg-net database not appropriate for age estimation

## Chapter 5: Application

Application of age estimation can be divided into several groups. Fu, Guo and Huang (2010) distinguish between applications of age estimation in: forensic art, electronic customer relationship management (eCRM), security control and surveillance monitoring, biometrics, entertainment and cosmetology.

In forensic art, age estimation is used mostly as age progression for suspects, victims and lost person identification (Mancusi). Age progression can predict a person's appearance across age and thus help in finding missing individuals (Ramanathan, Chellapa and Biswas, 2009). Another problem, described by Schmeling et al. (2006), is the problem of age estimation of unaccompanied minors. The problem arises when foreigners entering the country have no documents for their date of birth. They often make false statements about their age as to avoid being criminally prosecuted. Current practice is to physically examine immigrants, radiographic examination of the hand, radiographic examination of the clavicles and dental examination (Schmeling, 2006). Physical examination includes anthropometric measures such as height, weight, type of constitution and visible signs of sexual maturity. All of the above mentioned measures and practices are intrusive and require experts. One other solution for the problem of unaccompanied minors is the use of computer algorithm that will determine their age based on photographs of their face. There is also a growing problem of pedopornography. With Internet expansion, the problem of child pornography has increased and experts need to evaluate images of victims (Cattaneo et al., 2009). Age estimation can be used to determine the age of victims in images.

Reponen and Tapio (2003) give the definition of eCRM: „The eCRM or electronic customer relationship management encompasses all the CRM functions with the use of the net environment i.e., intranet, extranet and internet. Electronic CRM concerns all forms of managing relationships with customers making use of information technology (IT). ECRM is enterprises using IT to integrate internal organization resources and external "marketing" strategies to understand and fulfill their customers' needs. Comparing with traditional CRM, the integrated information for eCRM

intraorganizational collaboration can be more efficient for communication with customers. Age estimation in eCRM is used as a part of gathering information about customers to establish customer relations. Different age groups have different needs and preferences and that is where age estimation can be used (Fu, Guo and Huang, 2010).

The most widely spread usage of age estimation is in security control and surveillance monitoring. It can stop minors from entering bars and to prevent underage drinking. It can also prevent minors from buying tobacco products from vending machines. Age estimation can also prevent older people from entering some rides in amusement parks. Another very important thing is using age estimation for denying minors access to web sites for adults (Guo et al., 2008), (Lanitis, Draganova and Christodoulou, 2004), (Ramanathan, Chellapa and Biswas, 2009). Secure internet access control is closely related with human computer interaction. Age estimation can be used to determine the age of users to adjust the type of interaction to their age (Lanitis, Draganova and Christodoulou, 2004). Game levels could be adjusted according to user's age.

In biometrics, age estimation is used as a soft biometric characteristic to improve the performance of biometric systems. It can improve robustness of face recognition systems to time gap (Wang et al., 2006), (Lanitis, 2009) and the task of periodically updating large face databases with recent images could be skipped (Ramanathan, Chellapa and Biswas, 2009), (Lanitis, Draganova and Christodoulou, 2004), (Patterson et al., 2007).

Entertainment and cosmetology are other areas where age estimation is used. Very common effects in movies are aging and rejuvenating of actors, where age estimation and progression are utilized (Blanz and Vetter, 1999). Another usage of age estimation is in age-based retrieval of face images from different databases that can be used for creating e-photoalbums by age-range (Lanitis, Draganova and Christodoulou, 2004).

People have the tendency to want to look younger. Important thing in looking younger is rejuvenating of the face. Age estimation helps to predict the rejuvenating results (Fu et al., 2004).

## Chapter 6: Conclusion

Human age classification and estimation from facial images is a growing field of research. Face images contain various information and this research uses two-dimensional face images to classify images to those from children (age 0 to 17) or adults (age 18 and above). Other than this, the research uses face images to estimate the age of a person.

The main objective of this research was to develop an algorithm for human age classification and estimation which can classify humans into children and adults. This new algorithm is based on the model proposed in this research. More specific objectives identified to achieve the main objective are to identify changes on the face that occur during growth and aging, to identify facial landmarks necessary for algorithm creation, to identify ratios needed to create a new age classification and estimation algorithm and to compare the new algorithm accuracy with the accuracy of existing algorithms.

This research gives answers to the three research questions defined at the beginning of this research.

### **What changes occur on human face during growth and aging?**

Analysis of the state of the art research on facial changes during growth and aging gives an answer to this question. To this end, scientific methods of description, compilation, analysis, synthesis, generalization and specialization are used. The answer to this research question is given in Table 2.4. Face shape changes caused by growth or aging in Chapter 2.1. Aging Face.

### **Which facial landmarks are important for age classification and estimation?**

In Chapter 3.1.1. Facial Landmarks, analysis of state of the art research on facial landmarks used for age classification and estimation is given. First, all of the state of the art algorithms are analysed and an overview of landmarks used in those algorithms is given. After that, landmarks that appear at least twice are selected. Selected landmarks are combined with changes that happen on human face during growth and aging, and a

set of 26 landmarks used in this research is identified. These landmarks can be seen in Table 3.2. Landmark points used in this research.

### **Which facial ratios are important for age classification and estimation?**

The answer to the last research question identified is given in Chapter 3.1.2. Ratios. First, all Euclidean distances between 26 facial landmarks identified are calculated. There are 325 possible distances. After that, all ratios between those distances are calculated. The number of possible ratios is 52650. This is too large a number to do classification with, so the number needs to be reduced. The correlation between every ratio and age is nonlinear, so Spearman coefficient is calculated. Only ratios that have high correlation coefficient are used for age classification and estimation. This leaves 62 ratios. The answer to this research question is given in Table 3.3. Spearman coefficients.

Other than research questions there are two hypothesis that need to be confirmed.

### **The newly developed algorithm distinguishes children from adults based on facial anthropometric ratios with an accuracy of more than 80% when used on the publicly available Fg-net database.**

The newly developed algorithm uses Multi Layer Perceptron for classification. The 62 ratios identified as an answer to the third research question are used as a basis for the algorithm. Algorithm performance measurements used to test the classification part of the algorithm are explained in Chapter 4.2.1. Age Classification. The accuracy of the algorithm is 81.38% which confirms the first hypothesis. The table with complete results can be seen in Appendix A.

### **Usage of different facial anthropometric ratios than those used in existing anthropometric model, increases the accuracy of the algorithm when used for age estimation.**

In order to compare the results of the ratios from the new algorithm with the results of anthropometric model ratios for age estimation, the anthropometric model needs to be tested on the same database (Fg-net). The MAE value of the new algorithm tested on the Fg-net database is 6.67. The MAE value of the anthropometric model tested on the Fg-net database is 7.03. CS values of the new algorithm for error levels 0, 1, 5, 10, 15 and 20 are as follows: CS(0)=6.59%, CS(1)=18.16%, CS(5)=58.08%, CS(10)=81.44%,

CS(15)=90.12% and CS(20)=94.21%. CS values of the anthropometric model for error levels 0, 1, 5, 10, 15 and 20 are as follows: CS(0)=0%, CS(1)=0.10%, CS(5)=15.47%, CS(10)= 28.84%, CS(15)= 43.81% and CS(20)= 65.17%. These values confirm the second hypothesis. The table with complete results can be seen in Appendix B.

The scientific contribution of this research has been explained in Introduction and can be seen in systematization of knowledge on age classification and estimation, identification of facial landmarks relevant for age classification and estimation, using data mining to identify ratios important for age classification and estimation, creation of a new algorithm for age classification and evaluation of anthropometric model on a large database.

Other than scientific, this research has a social contribution also: determining the age of immigrants or asylum seekers in situations where there are no documents proving the age of the person, for websites where entrance is allowed only for persons older than age of 18, in order to improve the system for face recognition (most of them are sensitive to changes during aging), searching for missing persons over the years, in human-computer interaction based on age, for the purpose of predicting a persons aging, in the fight against pedophilia (removing images of minors from various portals or personal computers), etc. The possible application of this research is described in detail in Chapter 5 Application.

Future work will concentrate on improving the algorithm for both classification and estimation. The facial landmarks in this research have been marked manually. Future research will deal with automatic landmark detection and incorporating it in this algorithm. The private database will be extended and algorithm training will be done on a larger sample. Other than that, application of the algorithm will be further researched and algorithm will be modified to adhere to different fields of application.

# Bibliography

1. ALLEY, T.R. (1998) *Social and Applied Aspects of Perceiving Faces*. Psychology Press
2. ARTREA (2015) Mnogokuti. Available from: [http://www.artrea.com.hr/skola/Podsjetnik\\_Mnogokut.pdf](http://www.artrea.com.hr/skola/Podsjetnik_Mnogokut.pdf) [Accessed 5th March 2015]
3. BASTANFARD, A., NIK, M.A., DESHIBI, M.M. (2007) Iranian Face Database with Age, Pose and Expression. In *Proceedings of the International Conference on Machine Vision*. Islamabad, December 28th to December 29th 2007. IEEE. pp. 50-55
4. BEN, S., SU, G., WU, Y. (2008) A Two-Step Selective Region Ensemble for Facial Age Estimation. *Advanced Intelligent Computing Theories and Applications. With Aspects of Artificial Intelligence, Lecture Notes in Computer Science*. 5227. pp. 622-632
5. BLANZ, V., VETTER T. (1999) A Morphable Model for the Synthesis of 3D Faces. *Proceedings of the 26th annual conference on Computer graphics and interactive techniques*. Los Angeles, August 8th to August 13th 1999. pp. 187-194
6. BURT, D.M. and PERRETT, D.I. (1995) Perception of Age in Adult Caucasian Male Faces: Computer Graphic Manipulation of Shape and Colour Information. *Proceedings of the Royal Society of London Series B Biological Sciences*, 259 (1355). pp. 137-143
7. CAO, D., LEI, Z., ZHANG, Z., FENG, J., LI, S.Z. (2012) Human Age Estimation Using Ranking SVM. *Proceedings of the 7th Chinese conference on Biometric Recognition*. pp. 324-331
8. CATTANEO, C., RITZ-TIMME, S., GABRIEL, P., GIBELLI, D., GIUDICI, E., POPPA, P., NOHRDEN, D., ASSMANN, S., SCHMITT, R., GRANDI, M. (2009) The difficult issue of age assessment on pedo-pornographic material. *Forensic Science International*. 183. pp.21-24
9. CHANG, K.Y., CHEN, C.S., HUNG, Y.P. (2010) A Ranking Approach for Human Age Estimation Based on Face Images. *International Conference on Pattern Recognition*. Istanbul, August 23rd to August 26th. IEEE. pp. 3396-3399

10. CHANG, K.Y., CHEN, C.S., HUNG, Y.P. (2011) Ordinal Hyperplanes Ranker with Cost Sensitivities for Age Estimation. *IEEE Conference on Computer Vision and Pattern Recognition*. Providence, June 20th to June 25th 2011. IEEE. pp.585-592
11. CHAO, W.L., LIU, J.Z., DING, J.J. (2013) Facial Age Estimation based on Label-Sensitive learning and Age-Oriented Regression. *Pattern Recognition*. 46. pp. 628-641
12. CHEN, C., DANTCHEVA, A., ROSS, A. (2014) Impact of Facial Cosmetics on Automatic Gender and Age Estimation. *Proceedings of the 9th International Conference on Computer Vision Theory and Applications*. Lisbon, January 2014.
13. CHEN, C., YANG, W., WANG, Y., SHAN, S., RICANEK, K. (2011) Learning Gabor Features for Facial Age Estimation. *Biometric Recognition Lecture Notes in Computer Science*. 7098. pp. 204-213
14. CHEN, K., GONG, S., XIANG, T., LOY, C.C. (2013) Cumulative Attribute Space for Age and Crowd Density Estimation. *IEEE Conference on Computer Vision and Pattern Recognition*. Portland, June 23rd to June 28th 2013. IEEE. pp. 2467-2474
15. CHEN, Y.W., HAN, M.J., SONG, K.T., HO, Y.L. (2010) Image-Based Age-Group Classification Design using Facial Features. *International Conference on System Science and Engineering*. Taipei, July 1st to July 3rd 2010. IEEE. pp. 548-552
16. CHOI, S.E., LEE, Y.J., LEE, S.J., PARK, K.R., KIM, J. (2011) Age Estimation Using a Hierarchical Classifier Based on Global and Local Facial Features. *Pattern recognition*. 44 (6). pp. 1261-1281
17. COLEMAN, S.R., GROVER, R. (2006) The Anatomy of the Aging Face: Volume Loss and Changes in 3-Dimensional Topography. *Aesthetic surgery journal*. January/February 2006. pp. 4-9
18. COOTES, T.F., EDWARDS, G.J., TAYLOR C.J. (1998) Active Appearance Models. *Proceedings of European Conference on Computer Vision*. 2. Springer. pp. 484-498
19. CRESWELL, J.W. (2008) *Research Design: Qualitative, quantitative and mixed methods approaches, Third Edition*, Sage Publications



20. DAHLAN, H.A., MASHOHOR, S., MUMTAZAH, S. (2013) Age Estimation Using Specific Gabor Filter on Upper Facial Area. Proceedings of the Fourth International Conference on Signal and Image Processing, Lecture Notes in Electrical Engineering. 221. pp.629-638
21. DUONG, C.N., QUACH, K.G., LUU, K., LE, H.B. RICANEK K. (2011) Fine Tuning Age-estimation with Global and Local Facial Features. *The 36th International Conference on Acoustics, Speech and Signal Processing*. Prague, May 2011
22. EL DIB, M.Y., AL-SABAN, M. (2010) Human Age Estimation Using Enhanced Bio-inspired Features (EBIF). *International Conference on Image Processing*. Hong Kong, September 26th to September 29th 2010. IEEE. pp. 1589-1592
23. FACE AND EMOTION. Facial landmarks. Available from: <http://face-and-emotion.com/dataface/anatomy/landmarks.jsp>. [Accessed 13th February 2013]
24. FARKAS, L.G. (1994) *Anthropometry of the Head nad Face*. Raven Press
25. FARKAS, L.G. and MUNRO, I.R. (1987) *Anthropometric Facial Proportions in Medicine*. Charles C. Thomas Publisher, Springfield
26. Fg-net. Fg-net database. Available from: <http://www-prima.inrialpes.fr/FGnet/html/benchmarks.html>. [Accessed 13th February 2013]
27. Fg-net. The Fg-net Aging Database. Available from: <http://www-prima.inrialpes.fr/FGnet/html/benchmarks.html>. [Accessed 19th March 2014]
28. FU, Y. and HUANG, T.S. (2008) Human Age Estimation with Regression on Discriminative Aging Manifold. *IEEE Transactions on Multimedia*. 10 (4). pp. 578-584
29. FU, Y. and ZHENG, N.(2006) M-Face: An Appearance-Based Photorealistic Model for Multiple Facial Attributes Rendering. *IEEE Transactions on Circuits and Systems for Video technology*. 16 (7). pp. 830-842
30. FU, Y., GUO, G., HUANG, T.S. (2010) Age Synthesis and Estimation via Faces: A Survey. *IEEE Transactions on Pattern Analysis and Machine Intelligence*. 32 (11). pp. 1955-1976
31. FU, Y., XU, Y., HUANG, T.S. (2007) Estimating human age by manifold analysis of face pictures and regression on aging features. *International*

- Conference on Multimedia and Expo*. Beijing, July 2nd to July 5th 2007. IEEE. pp. 1383-1386
32. FU, Y., ZHENG, N., LIU, J., ZHANG, T. (2004) Facetransfer: A System Model of Facial Image Rendering. *Proceedings of IEEE Conference on System, Man and Cybernetics*. October 10th to October 13th 2004. IEEE. pp. 2180-2185
  33. GALLAGHER, A. and CHEN, T. (2008) Clothing Cosegmentation for Recognizing People. *Conference on Computer Vision and Pattern Recognition*. Anchorage, June 23rd to June 28th. IEEE. pp. 1-8
  34. GAO, F. and AI, H. (2009) Face Age Classification on Consumer Images with Gabor Feature and Fuzzy LDA Method, *Advances in Biometrics*. Proceedings of the Third International Conference on Biometrics. Alghero, June 2nd to June 5th 2009. pp 132-141
  35. GAO, P.X. (2012) Facial Age Estimation Using Clustered Multi-task Support Vector Regression Machine. *21st International Conference on Pattern Recognition*. Tsukuba, November 11th to November 15th 2012. IEEE. pp. 541-544
  36. GENG, X. and SMITH-MILES, K. (2009) Facial Age Estimation by Multilinear Subspace Analysis, *International conference on Acoustics, Speech and Signal Processing*. Taipei, April 19th to April 24th 2009. IEEE. pp. 865-868
  37. GENG, X., FU, Y., SMITH-MILES, K. (2010) Automatic Facial Age Estimation. *Pacific Rim International Conferences on Artificial Intelligence*. Daegu, August 30th to September 2nd 2010
  38. GENG, X., ZHOU, Z.H., SMITH-MILES, K. (2007) Automatic age estimation based on facial aging patterns. *IEEE Transactions on pattern analysis and machine intelligence*. 29(12). pp. 2234-2240
  39. GENG, X., ZHOU, Z.H., ZHANG, Y. (2006) Learning from Facial Aging Patterns for Automatic Age Estimation. *Proceedings of the ACM International Conference on Multimedia*. pp. 307-316
  40. GRD, P. (2013) Introduction to Human Age Estimation Using Face Images. *Research papers Faculty of Materials Science and Technology Slovak University of Technology in Trnava*. Special number. pp. 35-41

41. GUNAY, A. and NABIYEV, V.V. (2013) Age Estimation Based on Local Radon Features of Facial Images. *Computer and Information Sciences III*. pp. 183-190
42. GUO, G. (1994) Human Age Estimation and Sex Classification. *Video Analytics for Business Intelligence*. pp. 101-131
43. GUO, G., FU, Y., DYER, C.R., HUANG, T.S. (2008) A Probabilistic Fusion Approach to Human Age Prediction. *Computer Society Conference on Computer Vision and Pattern Recognition Workshops*.
44. GUO, G., FU, Y., DYER, C.R., HUANG, T.S. (2008) Image-based Human Age Estimation by Manifold Learning and Locally Adjusted Robust Regression. *IEEE Transactions on Image Processing*. 17 (7). pp. 1178-1188
45. GUO, G., FU, Y., HUANG, T.S., DYER, C. (2008) Locally Adjusted Robust Regression for Human Age Estimation. *Proceedings of IEEE Workshop Applications of Computer Vision*. Copper Mountain, January 7th to January 9th 2008, pp. 1-6
46. GUO, G., MU, G., Fu, Y., HUANG, T.S. (2009) Human Age Estimation Using Bio-inspired Features. *Conference on Computer Vision and Pattern Recognition*. Miami, June 20th to June 25th 2009. IEEE. pp. 112-119
47. GUO, J.M., LIOU, Y.M. NGUYEN, H.S. (2011) Human Face Age Estimation with Adaptive Hybrid Features. *Proceedings of 2011 International Conference on System Science and Engineering*. Macao, June 8th to June 10th 2011. pp. 55-58
48. HAJIZEDAH, M.A., EBRAHIMNEZHAD, H. (2011) Classification of Age Groups from Facial Image Using Histograms of Oriented Gradients. *7th Iranian Machine Vision and Image Processing*. Tehran, November 16th to November 17th 2011. IEEE. pp. 1-5
49. HAMILTON, J.D. (1994) *Time Series Analysis*. Princeton University Press
50. HORNG, W.B., LEE, C.P., CHEN, C.W. (2001) Classification of Age Groups Based on Facial Features. *Tamkang Journal of Science and Engineering*. 4 (3). pp. 183-192
51. HU, C., GONG, L., WANG, T., FENG, Q. (2013) Effective Human Age Estimation Using a Two-Stage Approach Based on Lie Algebrized Gaussians Feature. *Multimedia Tools and Applications*. Springer US. pp. 1-21

52. IZADPANAHI, S. and TOYGAR, O. (2012) Geometric Feature Based Age Classification Using Facial Images. *IET Conference on Image Processing*. London, July 3rd to July 4th 2012. IET. pp. 1-5
53. JU, C.H. and WANG, Y.H. (2009) Automatic Age Estimation Based on Local Feature of Face Image and Regression. *International Conference on Machine Learning and Cybernetics*. Baoding, July 12th to July 15th 2009. IEEE. pp. 885-888
54. KALAMANI, D. and BALASUBRAMANIE, P. (2006) Age Classification using Fuzzy Lattice Neural Network. *Proceedings of the Sixth International Conference on Intelligent Systems Design and Application*. 3. October 2006. pp. 225-230
55. KARLIK, B. And OLGAC A.V. (2010) Performance Analysis of Various Activation Functions in Generalized MLP Architectures of Neural Networks. *International Journal of Artificial Intelligence and Expert Systems (IJAE)*. 1 (4). pp. 111-122
56. KILINC, M. and AKGUL, Y.S. (2013) Automatic Human Age Estimation Using Overlapped Age Groups. *Computer Vision, Imaging and Computer Graphics. Theory and Application, Communications in Computer and Information Science*. 359. pp 313-325
57. KLEINBERG, K.F. and SIEBERT, J.P. (2012) A Study of Quantitative Comparisons of Photographs and Video Images Based on Landmark Derived Feature Vectors. *Forensic Science International*. 219 (1–3). pp. 248–258
58. KOHAVI, R. and PROVOST, F. (1998) Glossary of Terms. Editorial for the Special Issue on Applications of Machine Learning and the Knowledge Discovery Process. 30(2/3).
59. KOHLI, S., PRAKASH, S., GUPTA, P. (2011) Age Estimation Using Active Appearance Models and Ensemble of Classifiers with Dissimilarity-Based Classification. *Advanced Intelligent Computing, Lecture Notes in Computer Science*. 6838. pp. 327-334
60. KORUGA, P., BAČA, M., SCHATTEN, M., (2011) Analysis of Craniofacial Morphology Changes during Aging and their Connection with Facial Age Estimation. *Proceedings of the 33rd International Conference on Information Technology Interfaces*. Cavtat, June 27th to June 30th 2011. IEEE. pp.481-485

61. KOSTINGER, M., WOHLHART, P., ROTH, P.M., BISCHOF, H. (2011) Annotated Facial Landmarks in the Wild a Largescale Realworld Database for Facial Landmark Localization. *IEEE International Conference on Computer Vision Workshops*. Barcelona, November 6th to November 13th 2011. pp. 2144 - 2151
62. KOU, J., DU, J.X., ZHAI, C.M. (2012) Integration of Global and Local Feature for Age Estimation of Facial Images. *Intelligent Computing Theories and Applications, Lecture Notes in Computer Science*. (7390). pp 455-462
63. KULENOVIĆ, Z. and SLIŠKOVIĆ, M. Metodologija znanstvenoistraživačkog rada, Pomorski fakultet u Splitu. Online: <https://www.pfst.hr/uploads/MZIR-Predavanje5.pdf>
64. KWON, Y.H. and LOBO, N.V. (1999) Age Classification from Facial Images. *IEEE Computer Society Conference on Computer Vision and Pattern Recognition*. Seattle, June 21st to June 23rd. IEEE. pp. 762-767
65. LANITIS A., DRAGANOVA C., CHRISTODOULOU, C. (2004) Comparing Different Classifiers for Automatic Age Estimation. *IEEE Transactions on Systems, Man and Cybernetics – Part B: Cybernetics*. 34 (1). pp. 621-628
66. LANITIS, A. (2008) Comparative Evaluation of Automatic Age Progression Methodologies. *EURASIP Journal on Advances in Signal Processing*. 2008. pp. 1-10
67. LANITIS, A. (2009) Facial Biometric Templates and Aging: Problems and Challenges for Artificial Intelligence. *Proceedings of the Workshops of the 5th IFIP Conference on Artificial Intelligence Applications & Innovations*. pp. 142-149
68. LANITIS, A., TAYLOR, C., COOTES, T. (2002) Toward Automatic Simulation of Aging Effects on Face Images. *IEEE Transactions on Pattern Analysis and Machine Intelligence*. 24 (4). pp. 442-455
69. LANITIS, A., TAYLOR, C.J., COOTES T.F. (1999) Modeling the Process of Ageing in Face Images. *The Proceedings of the Seventh IEEE International Conference on Computer Vision*. Kerkyra, 1999. pp. 131-136

70. LECTURE NOTES. Precision and Recall. Available from: <http://www.cs.odu.edu/~mukka/cs495s13/Lecturenotes/Chapter5/recallprecision.pdf>. [Accessed 12th February 2015]
71. LI, C., LIU, Q., LIU, J., LU, H. (2012) Learning Distance Metric Regression for Facial Age Estimation. *21st International Conference on Pattern Recognition*. Tsukuba, November 11th to November 15th 2012. IEEE. pp. 2327-2330
72. LI, C., LIU, Q., LIU, J., LU, H. (2012) Learning Ordinal Discriminative Features for Age Estimation. *IEEE Conference on Computer Vision and Pattern Recognition*. Providence, June 16th to June 21st. IEEE. pp.2570-2577
73. LI, W., WANG, Y., ZHANG, Z. (2012) A Hierarchical Framework for Image-based Human Age Estimation by Weighted and OHRanked Sparse Representation-based Classification. *International conference on Biometrics*. New Delhi, March 29th to April 1st 2012. IEEE. pp. 19-25
74. LIAN, Y., LIU, L., XU, Y., XIANG, Y., ZOU, B. (2011) Multi-Task Gloh Feature Selection for Human Age Estimation, *18th IEEE Conference on Image Processing*. Brussels, September 11th to September 14th 2011. IEEE. pp. 565-568
75. LONG, Y. (2009) Human Age Estimation by Metric Learning for Regression Problems. *Sixth International Conference on Computer Graphics, Imaging and Visualization*. Tianjin, August 11th to August 14th 2009. IEEE. pp. 343-348
76. LU, J. and TAN Y.P. (2011) Fusing Shape and Texture Information for Facial Age Estimation. *IEEE International Conference on Acoustics, Speech and Signal Processing*. Prague, May 22nd to May 27th 2011. pp. 1477-1480
77. LU, J. and TAN Y.P. (2012) Ordinary Preserving Manifold Analysis for Human Age and Head Pose Estimation. *IEEE Transactions on Systems, Man and Cybernetics-Part C: Applications and Reviews*. 43 (2). pp. 249-258
78. LUO, X., PANG, X, MA, B., LIU, F. (2011) Age Estimation Using Multi-Label Learning. *Biometric Recognition, Lecture Notes in Computer Science*. 7098. pp. 221-228
79. LUU, K., BUI, T.D., SUEN, C.Y., RICANEK, K. JR. (2010) Combined Local and Holistic Facial Features for Age-Determination. *11th International Conference on Control, Automation, Robotics and Vision*. Singapore, December 7th to December 10th. IEEE. pp. 900-904

80. LUU, K., RICANEK, K. JR., BUI, T.D., SUEN, C.Y. (2009) Age Estimation using Active Appearance Models and Support Vector Machine Regression. *3rd International Conference on Biometrics: Theory, Applications, and Systems*. Washington, September 28th to September 30th 2009. IEEE. pp. 1-5
81. LUU, K., SESHADRI, K., SAVVIDES, M., BUI, T.D., SUEN, C.Y. (2011) Contourlet Appearance Model for Facial Age Estimation. *International Joint Conference on Biometrics*. Washington, October 11th to October 13th 2011. IEEE. pp. 1-8
82. MANCUSI S. Image Modification, Aging Progression and Age Regression
83. MEDICAL DICTIONARY. Anthropometry. Available from: <http://medical-dictionary.thefreedictionary.com/anthropometry>. [Accessed 12th February 2015]
84. MOHAN, M.C., KUMAR, V.V., KRISHNA, V.V. (2010) Novel Method of Adult Age Classification Using Linear Wavelet Transforms. *International Journal of Computer Science and Network Security*. 10 (3). pp. 61-68
85. MONTAGU, A. (1960) *Handbook of Anthropometry*.
86. MORPH. Morph Face Database. Available from: <http://www.faceaginggroup.com/morph/>. [Accessed 19th March 2014]
87. NAKAI, T., OKAKURA, T., ARAKAWA, K. (2010) Face Recognition Across Age Progression Using Block Matching Method. *International Symposium on Communications and Information Technologies*. Tokyo, October 26th to October 29th 2010. IEEE. pp. 620-625
88. NAKANO, M. and FUKUMI, M. (2005) Age and Gender Recognition Using Facial Edge Information. *Proceedings of the First World Congress of the International Federation for Systems Research: The New Roles of Systems Sciences For a Knowledge-based Society*. Kobe, November 14th to November 17th 2005. JAIST Press.
89. NARODNE NOVINE. Zakon o zaštiti osobnih podataka. Available from: <http://narodne-novine.nn.hr/clanci/sluzbeni/305952.html>. [Accessed 12th February 2013]
90. NEURAL NETWORKS. Neural networks. Available from: [http://www.doc.ic.ac.uk/~nd/surprise\\_96/journal/vol4/cs11/report.html#Introduction](http://www.doc.ic.ac.uk/~nd/surprise_96/journal/vol4/cs11/report.html#Introduction) to neural networks. [Accessed 12th February 2015]

91. NI, B., SONG, Z., YAN, S. (2009) Web Image Mining towards Universal Age Estimator. *Proceedings of the 17th ACM international conference on Multimedia*. Beijing, October 19th to October 24th 2009. pp. 85-94
92. NITHYASHRI, J. and KULANTHAIVEL, G. (2012) Classification of Human Age based on Neural Network Using Fg-net Aging Database and Wavelet. *IEEE Fourth International Conference on Advanced Computing*. Chennai, December 13th to December 15th 2012. pp. 1-5
93. NKENGNE, A., TENENHAUS, A., FERTIL, B. (2011) Age Prediction Using a Supervised Facial Model. *International Symposium on Biomedical Imaging: From Nano to Macro*. Chicago, March 30th to April 2nd 2011. IEEE. pp. 1183 - 1188
94. OKAKURA, T. And ARAKAWA, K. (2011) Face Authentication Across Age Progression Using Shifted Block Matching. *International Symposium on Intelligent Signal Processing and Communication Systems*. Chiang Mai, December 7th to December 9th 2011. IEEE. pp. 1-6
95. PAL. Pal database. Available from: <http://agingmind.utdallas.edu/facedb>. [Accessed 19th March 2014]
96. PATTERSON, E., SETHURAM, A., ALBERT, M., RICANEK, K., KING, M. (2007) Aspects of Age Variation in Facial Morphology Affecting Biometrics. *IEEE Conference on Biometrics: Theory, Applications and Systems*. Crystal City, September 27th to September 29th 2007. IEEE. pp. 1-6
97. QI, H. and ZHANG L. (2009) Age Classification System with ICA Based Local Facial Features. *Advances in Neural Networks, Lecture Notes in Computer Science*. 5552. pp. 763-772
98. QIN, T., ZHANG, X., WANG, D., LIU, T., LAI, W., LI, H. (2007) Ranking with Multiple Hyperplanes. *Proceedings of the 30th annual international ACM SIGIR conference on Research and development in information retrieval*. pp. 279-286
99. RAMANATHAN, N. and CHELLAPPA, R. (2006) Modeling Age Progression in Young Faces. *IEEE Computer Society Conference on Computer Vision and Pattern Recognition*. June 17th to June 22nd 2006. IEEE. pp. 387-394
100. REPONEN, T. (2003) *Information Technology-Enabled Global Customer Service*. Idea Group Publishing



101. RICANEK, K. JR. (2008) *Craniofacial Aging*. Wiley Handbook of Science and Technology for Homeland Security
102. RICANEK, K. JR., MAHALINGAM, G., ALBERT, A.M., VORDER BRUEGGE, R.W. () Human face ageing: a perspective analysis from anthropometry and biometrics. Book Chapter in *Age Factors in Biometric Processing* Edited by Michael Fairhurst
103. RICANEK, K. JR., WANG, Y., CHEN, C., SIMMONS, S.J. (2009) Generalized Multi-Ethnic Face Age-Estimation. *International Conference on Biometrics: Theory, Applications and Systems*. Washington, September 28th to September 30th 2009. IEEE. pp. 1-6
104. SCHMELING, A., REISINGER, W., GESERICK, G., OLZE, A. (2006) Age estimation of unaccompanied minors Part I. General considerations. *Forensic Science International*. 159. pp. 61-64
105. SCHOLARPEDIA. Facial Age Estimation. Available from: [http://www.scholarpedia.org/article/Facial\\_Age\\_Estimation](http://www.scholarpedia.org/article/Facial_Age_Estimation). [Accessed 13th February 2013]
106. SELVI, V.T. and VANI, K. (2011) Age Estimation System using MPCA. *International Conference on Recent Trends in Information Technology*. Chennai, June 3rd to June 5th 2011. IEEE. pp. 1055-1060
107. SHEN, L.L. and JI, Z. (2008) Modelling Geometric Features for Face Based Age Classification. *Proceedings of the Seventh International Conference on Machine Learning and Cybernetics*. Kunming, July 12th to July 15th 2008. IEEE. pp. 2927-2931
108. SHIMODAIRA, H. (2015) Single Layer Neural Networks. *Learning and Data Note*.
109. SUO, J., WU, T., ZHU, S., SHAN, S., CHEN, X., GAO, W. (2008) Design Sparse Features for Age Estimation using Hierarchical Face Model. *8th IEEE International Conference on Automatic Face & Gesture Recognition*. Amsterdam, September 17th to September 19th 2008. IEEE. pp. 1-6
110. TAKIMOTO, H., KUWANO, T., MITSUKURA, Y., FUKAI, H., FUKUM, M. (2007) Appearance Age Feature Extraction from Facial Image Based on Age Perception. *International Conference on Instrumentation, Control and*

- Information Technology*. Kagawa, September 17th to September 20th 2007. pp. 2813-2818
111. TKALEC VERČIĆ, A., SINČIĆ ĆORIĆ, D., POLOŠKI VOKIĆ N. (2010) *Priručnik za metodologiju istraživačkog rada*. M.E.P. d.o.o.
  112. TURAGA, P., BISWAS, S., CHELLAPA, R. (2010) The Role of Geometry in Age Estimation. *IEEE International Conference on Acoustics Speech and Signal Processing*. Dallas, March 14th to March 19th 2010. IEEE. pp. 946-949
  113. TXIA, J.D., and HUANG, C.L. (2009) Age Estimation Using AAM and Local Facial Features. *Fifth International Conference on Intelligent Information Hiding and Multimedia Signal Processing*. Kyoto, September 12th to September 14th 2009. IEEE. pp. 885- 888
  114. UEKI, K., HAYASHIDA, T., KOBAYASHI, T. (2006) Subspace-based Age Group classification Using Facial Images under Various Lighting Conditions. *Proceedings of IEEE Conference on Automatic Face and Gesture Recognition*. Southampton, April 2nd to April 6th 2006. pp.43-48
  115. UEKI, K., MIYA, M., OGAWA, T., KOBAYASHI, T. (2008) Class Distance Weighted Locality Preserving Projection for Automatic Age Estimation. *2nd IEEE International Conference on Biometrics: Theory, Applications and Systems*. Arlington, September 29th to October 1st 2008. IEEE. pp. 1-5
  116. WANG, J., SHANG, Y., SU, G., Lin, X. (2006) Age Simulation for Face Recognition. *Proceedings of International Conference on Pattern Recognition*. Hong Kong. pp. 913-916
  117. WENG, R., LU, J., YANG, G., TAN, Y.P. (2012) Multi-Feature Ordinal Ranking for Facial Age Estimation. *International Conference and Workshops on Automatic Face and Gesture Recognition*. Shanghai, April 22nd to April 26th 2013. IEEE. pp. 1-6
  118. XIAO, B., YANG, X., XU, Y., ZHA, H. (2009) Learning Distance Metric for Regression by Semidefinite Programming with Application to Human Age Estimation. *Proceedings of the ACM international conference on multimedia*. pp. 451-460

119. YAN, S., WANG, H., HUANG, T., YANG, Q., XIAOOU, X.T. (2007) Ranking with Uncertain Labels. *International Conference on Multimedia and Expo*. Beijing, July 2nd to July 5th 2007. IEEE. pp. 96-99
120. YAN, S., WANG, H., TANG, X., HUANG, T.S. (2007) Learning Auto-Structured Regressor from Uncertain Nonnegative Labels. *Proceedings of IEEE Conference on Computer Vision*. Rio de Janeiro, October 14th to October 21st 2007. IEEE. pp. 1-8
121. YANG, W., CHEN, C., RICANEK, K., SUN, C. (2011) Ensemble of Global and Local Features for Face Age Estimation. *Advances in Neural Networks, Lecture Notes in Computer Science*. 6676. pp. 251-259
122. YAO, B., YANG, X., ZHU, S.C. (2007) Introduction to a large scale general purpose ground truth dataset: methodology, annotation tool, and benchmarks. *Proceedings of the 6th international conference on Energy minimization methods in computer vision and pattern recognition*. pp. 169-183
123. YIN, C. and GENG X. (2012) Facial Age Estimation by Conditional Probability Neural Network. *Pattern Recognition Communications in Computer and Information Science*. 321. pp. 243-250
124. YLIOINAS, J., HADID, A., HONG, X., PIETIKAINEN, M. (2013) Age Estimation Using Local Binary Pattern Kernel Density Estimate. *International Conference on Image Analysis and Processing*. Naples, September 9th to September 13th 2013. Springer. pp. 141-150, 2013
125. ZHAI, C.M., QING Y., JI-XIANG, D. (2010) Age Estimation of Facial Images Based on an Improved Non-negative Matrix Factorization Algorithms. *Advanced Intelligent Computing Theories and Applications. With Aspects of Artificial Intelligence*. pp. 670-676
126. ZHAN, C., LI, W., OGUNBONA, P. (2011) Age Estimation Based on Extended Non-negative Matrix Factorization. *International Workshop on Multimedia Signal Processing*. Hangzhou, October 17th to October 19th 2011. pp. 1-6
127. ZHANG, Y. (2012) Age Estimation Using Bayesian Process. *New Frontiers in Applied Data Mining, Lecture Notes in Computer Science*. 7104. pp. 447-458

128. ZHANG, Y. and YEUNG, D.Y. (2010) Multi-task Warped Gaussian Process for Personalized Age Estimation, *IEEE Conference on Computer Vision and Pattern Recognition*. San Francisco, June 13th to June 18th 2010. IEEE. pp. 2622-2629
129. ZHOU, H., MILLER, P. and ZHANG, J. (2011) Age classification using Radon transform and entropy based scaling SVM. *Proceedings of the British Machine Vision Conference*. September 2011. pp. 1-12
130. ZHOU, S.K., GEORGESCU, B., ZHOU, X.S., COMANICIU, D. (2005) Image Based Regression Using Boosting method. *Proceedings of IEEE International Conference on Computer Vision*. October 17th to October 21st 2005. IEEE. pp. 541-548
131. ZHUANG, X., ZHOU, X., HASEGAWA-JOHNSON, M., HUANG, T. (2008) Face Age Estimation Using Patch-based Hidden Markov Model Supervectors. *International Conference on Pattern Recognition*. Tampa, December 8th to December 11th 2008. IEEE. pp. 1-4

## APPENDIX A New algorithm results for Fg-net database

Image ID	Real Age	Real Class	Estimated Class	Estimated Age
13_0	0	1	1	1
15_0	0	1	1	0
19_0	0	1	1	5
22_0	0	1	1	3
23_0	0	1	1	5
24_0	0	1	1	7
25_0	0	1	1	2
26_0	0	1	1	1
30_0	0	1	1	8
31_0	0	1	1	4
35_0	0	1	1	8
36_0	0	1	1	0
37_0	0	1	1	2
38_0	0	1	1	0
40_0	0	1	1	9
41_0	0	1	1	4
42_0	0	1	1	0
43_0	0	1	1	0
46_0	0	1	1	0
48_0	0	1	1	1
50_0	0	1	1	0

Image ID	Real Age	Real Class	Estimated Class	Estimated Age
66_8	8	1	1	14
70_8	8	1	1	3
73_8	8	1	1	13
74_8	8	1	1	6
75_8	8	1	1	3
76_8	8	1	1	7
77_8	8	1	1	7
78_8	8	1	2	22
79_8	8	1	1	13
8_8	8	1	1	11
80_8	8	1	1	18
81_8	8	1	1	9
10_9	9	1	2	17
15_9	9	1	1	16
23_9	9	1	1	8
31_9	9	1	2	23
35_9	9	1	1	10
37_9	9	1	1	10
40_9	9	1	1	19
41_9	9	1	1	16
47_9	9	1	1	14

Image ID	Real Age	Real Class	Estimated Class	Estimated Age
45_18	18	2	2	24
46_18	18	2	2	21
47_18	18	2	2	21
48_18	18	2	2	21
5_18	18	2	2	19
50_18	18	2	2	29
51_18	18	2	2	26
52_18	18	2	2	19
53_18	18	2	2	25
54_18	18	2	2	26
57_18	18	2	2	23
61_18	18	2	2	26
62_18	18	2	2	23
63_18	18	2	2	28
7_18	18	2	2	24
71_18	18	2	1	13
8_18	18	2	2	24
82_18	18	2	2	27
9_18	18	2	1	16
1_19	19	2	2	29
13_19	19	2	1	16

51_0	0	1	1	4
53_0	0	1	1	15
54_0	0	1	1	13
57_0	0	1	1	3
58_0	0	1	1	13
63_0	0	1	1	2
66_0	0	1	1	4
68_0	0	1	1	6
69_0	0	1	1	1
70_0	0	1	1	0
71_0	0	1	1	2
73_0	0	1	1	11
74_0	0	1	1	0
75_0	0	1	1	4
76_0	0	1	1	1
77_0	0	1	1	0
78_0	0	1	1	9
79_0	0	1	1	2
80_0	0	1	1	5
81_0	0	1	1	3
82_0	0	1	1	1
9_0	0	1	1	5
10_1	1	1	1	1
15_1	1	1	1	0
16_1	1	1	1	0
29_1	1	1	1	12
35_1	1	1	1	2
36_1	1	1	1	3

48_9	9	1	1	16
54_9	9	1	2	22
63_9	9	1	2	20
65_9	9	1	1	8
66_9	9	1	1	16
68_9	9	1	2	11
69_9	9	1	1	16
70_9	9	1	1	10
73_9	9	1	1	7
74_9	9	1	1	7
76_9	9	1	1	9
77_9	9	1	1	10
78_9	9	1	1	15
79_9	9	1	1	9
80_9	9	1	1	13
9_9	9	1	1	9
1_10	10	1	1	16
10_10	10	1	1	5
15_10	10	1	1	6
16_10	10	1	1	9
24_10	10	1	1	15
29_10	10	1	1	16
30_10	10	1	1	21
32_10	10	1	1	11
33_10	10	1	1	12
38_10	10	1	1	7
39_10	10	1	1	8
40_10	10	1	1	11

15_19	19	2	1	14
16_19	19	2	2	21
17_19	19	2	2	26
24_19	19	2	2	22
25_19	19	2	2	24
26_19	19	2	2	22
31_19	19	2	2	28
36_19	19	2	2	21
37_19	19	2	1	16
39_19	19	2	1	13
4_19	19	2	2	17
40_19	19	2	2	30
41_19	19	2	1	12
43_19	19	2	2	20
45_19	19	2	2	24
52_19	19	2	2	29
54_19	19	2	2	31
60_19	19	2	1	9
61_19	19	2	2	21
64_19	19	2	2	27
72_19	19	2	2	17
11_20	20	2	2	27
2_20	20	2	2	23
20_20	20	2	1	15
21_20	20	2	2	26
22_20	20	2	1	12
27_20	20	2	2	20
28_20	20	2	2	22

37_1	1	1	1	2
38_1	1	1	1	0
42_1	1	1	1	6
44_1	1	1	1	0
46_1	1	1	1	6
53_1	1	1	1	6
56_1	1	1	1	0
58_1	1	1	2	21
64_1	1	1	1	2
7_1	1	1	1	0
70_1	1	1	1	6
73_1	1	1	1	4
74_1	1	1	1	2
75_1	1	1	1	2
76_1	1	1	1	2
77_1	1	1	1	4
78_1	1	1	1	6
79_1	1	1	1	3
80_1	1	1	1	5
81_1	1	1	1	0
9_1	1	1	1	0
1_2	2	1	1	0
11_2	2	1	1	0
20_2	2	1	1	19
26_2	2	1	1	3
27_2	2	1	1	8
31_2	2	1	1	2
33_2	2	1	1	0

42_10	10	1	1	16
43_10	10	1	1	14
46_10	10	1	1	8
48_10	10	1	1	7
49_10	10	1	1	11
50_10	10	1	2	21
52_10	10	1	2	20
53_10	10	1	1	12
54_10	10	1	1	17
56_10	10	1	1	10
58_10	10	1	1	18
60_10	10	1	1	9
61_10	10	1	2	22
64_10	10	1	2	26
65_10	10	1	1	15
66_10	10	1	1	21
68_10	10	1	1	13
68_10	10	1	1	4
69_10	10	1	1	19
71_10	10	1	1	15
74_10	10	1	1	8
75_10	10	1	1	10
76_10	10	1	1	10
77_10	10	1	1	11
78_10	10	1	1	19
79_10	10	1	1	10
80_10	10	1	1	15
81_10	10	1	1	14

29_20	20	2	2	21
3_20	20	2	2	22
30_20	20	2	1	20
32_20	20	2	1	13
36_20	20	2	1	22
41_20	20	2	1	13
42_20	20	2	2	22
46_20	20	2	2	25
47_20	20	2	1	15
52_20	20	2	2	24
60_20	20	2	2	28
63_20	20	2	2	23
82_20	20	2	2	26
12_21	21	2	1	20
13_21	21	2	2	12
2_21	21	2	2	22
23_21	21	2	2	27
33_21	21	2	2	15
34_21	21	2	2	21
35_21	21	2	2	21
38_21	21	2	2	19
4_21	21	2	2	23
40_21	21	2	2	26
41_21	21	2	1	14
44_21	21	2	2	23
67_21	21	2	1	17
72_21	21	2	2	18
8_21	21	2	2	17

34_2	2	1	1	6
37_2	2	1	1	6
39_2	2	1	1	3
40_2	2	1	1	5
41_2	2	1	1	0
46_2	2	1	1	3
51_2	2	1	1	3
52_2	2	1	1	6
53_2	2	1	1	7
54_2	2	1	2	25
56_2	2	1	1	4
58_2	2	1	1	5
59_2	2	1	1	10
59_2	2	1	1	8
60_2	2	1	1	2
63_2	2	1	1	2
65_2	2	1	1	1
65_2	2	1	1	1
66_2	2	1	1	2
66_2	2	1	1	10
69_2	2	1	1	6
70_2	2	1	1	5
72_2	2	1	1	1
73_2	2	1	1	7
74_2	2	1	1	7
75_2	2	1	1	0
76_2	2	1	1	4
77_2	2	1	1	5

11_11	11	1	1	14
18_11	11	1	2	22
20_11	11	1	1	19
21_11	11	1	2	14
22_11	11	1	1	13
26_11	11	1	1	18
27_11	11	1	1	10
29_11	11	1	1	17
31_11	11	1	1	22
34_11	11	1	2	23
36_11	11	1	1	10
37_11	11	1	1	11
38_11	11	1	1	15
39_11	11	1	1	10
47_11	11	1	1	14
48_11	11	1	1	7
53_11	11	1	1	6
54_11	11	1	2	19
60_11	11	1	1	15
65_11	11	1	1	22
66_11	11	1	1	19
68_11	11	1	1	19
69_11	11	1	1	7
72_11	11	1	1	13
73_11	11	1	1	11
74_11	11	1	1	7
75_11	11	1	1	13
76_11	11	1	1	10

82_21	21	2	2	26
1_22	22	2	2	33
14_22	22	2	2	17
17_22	22	2	2	26
18_22	22	2	1	11
20_22	22	2	2	28
23_22	22	2	2	22
25_22	22	2	1	16
27_22	22	2	2	22
29_22	22	2	2	27
50_22	22	2	2	22
55_22	22	2	1	13
63_22	22	2	2	25
7_22	22	2	2	21
71_22	22	2	1	12
82_22	22	2	2	27
9_22	22	2	1	14
9_22	22	2	1	14
12_23	23	2	2	21
13_23	23	2	1	8
19_23	23	2	2	20
2_23	23	2	2	16
21_23	23	2	2	29
22_23	23	2	1	14
24_23	23	2	2	26
25_23	23	2	1	16
29_23	23	2	2	27
3_23	23	2	2	28



78_2	2	1	1	10
79_2	2	1	1	4
80_2	2	1	1	2
81_2	2	1	1	9
14_3	3	1	1	0
15_3	3	1	1	3
16_3	3	1	1	3
19_3	3	1	1	13
2_3	3	1	1	12
21_3	3	1	1	7
23_3	3	1	1	6
25_3	3	1	1	7
31_3	3	1	1	4
35_3	3	1	1	5
36_3	3	1	1	6
38_3	3	1	1	1
40_3	3	1	1	19
40_3	3	1	1	10
43_3	3	1	1	0
44_3	3	1	1	0
45_3	3	1	1	5
50_3	3	1	1	0
53_3	3	1	1	4
56_3	3	1	1	6
58_3	3	1	1	13
59_3	3	1	1	12
62_3	3	1	1	9
64_3	3	1	1	3

77_11	11	1	1	12
78_11	11	1	1	18
79_11	11	1	1	6
81_11	11	1	1	20
9_11	11	1	2	18
10_12	12	1	1	0
12_12	12	1	1	6
14_12	12	1	1	7
15_12	12	1	1	11
16_12	12	1	1	16
17_12	12	1	1	15
19_12	12	1	2	24
2_12	12	1	1	19
25_12	12	1	2	20
31_12	12	1	1	22
35_12	12	1	1	6
40_12	12	1	2	23
42_12	12	1	1	16
45_12	12	1	1	14
46_12	12	1	1	14
47_12	12	1	1	14
49_12	12	1	1	24
51_12	12	1	2	20
53_12	12	1	1	13
54_12	12	1	1	15
55_12	12	1	1	12
56_12	12	1	1	7
57_12	12	1	1	5

30_23	23	2	2	24
35_23	23	2	2	22
35_23	23	2	2	24
38_23	23	2	2	28
43_23	23	2	2	17
47_23	23	2	1	19
55_23	23	2	1	21
57_23	23	2	2	21
67_23	23	2	2	26
7_23	23	2	2	18
71_23	23	2	1	14
82_23	23	2	2	25
12_24	24	2	2	19
20_24	24	2	2	23
32_24	24	2	2	22
41_24	24	2	1	20
42_24	24	2	2	21
5_24	24	2	2	19
51_24	24	2	2	27
6_24	24	2	2	27
71_24	24	2	2	23
12_25	25	2	1	19
13_25	25	2	2	21
18_25	25	2	2	22
22_25	25	2	1	23
23_25	25	2	2	24
24_25	25	2	2	25
27_25	25	2	1	17

65_3	3	1	1	2
65_3	3	1	1	6
66_3	3	1	1	1
68_3	3	1	1	5
69_3	3	1	1	0
70_3	3	1	1	6
73_3	3	1	1	2
74_3	3	1	1	1
75_3	3	1	1	4
76_3	3	1	1	3
77_3	3	1	1	7
78_3	3	1	1	6
79_3	3	1	1	9
8_3	3	1	1	0
80_3	3	1	1	8
81_3	3	1	1	7
82_3	3	1	1	5
9_3	3	1	1	6
10_4	4	1	1	6
12_4	4	1	2	21
15_4	4	1	1	8
16_4	4	1	1	0
2_4	4	1	1	12
20_4	4	1	1	3
26_4	4	1	1	8
29_4	4	1	2	22
30_4	4	1	1	18
31_4	4	1	1	1

59_12	12	1	1	18
60_12	12	1	2	15
65_12	12	1	1	10
68_12	12	1	1	11
70_12	12	1	1	9
73_12	12	1	1	10
74_12	12	1	1	7
76_12	12	1	1	8
77_12	12	1	1	12
78_12	12	1	1	19
79_12	12	1	1	16
8_12	12	1	2	23
80_12	12	1	2	24
81_12	12	1	1	17
11_13	13	1	1	18
20_13	13	1	2	24
26_13	13	1	1	11
27_13	13	1	1	14
29_13	13	1	1	12
32_13	13	1	1	18
34_13	13	1	2	23
36_13	13	1	1	18
37_13	13	1	1	8
38_13	13	1	1	6
39_13	13	1	1	12
41_13	13	1	1	6
43_13	13	1	1	11
44_13	13	1	2	22

3_25	25	2	2	31
33_25	25	2	1	11
34_25	25	2	2	27
44_25	25	2	2	22
45_25	25	2	2	26
57_25	25	2	2	24
61_25	25	2	2	26
63_25	25	2	2	25
72_25	25	2	2	13
82_25	25	2	2	28
12_26	26	2	2	26
17_26	26	2	2	30
2_26	26	2	2	23
20_26	26	2	2	23
22_26	26	2	2	23
28_26	26	2	1	18
30_26	26	2	2	25
4_26	26	2	2	21
61_26	26	2	2	23
67_26	26	2	1	15
7_26	26	2	1	12
11_27	27	2	2	26
12_27	27	2	2	21
19_27	27	2	1	14
21_27	27	2	2	26
22_27	27	2	2	23
43_27	27	2	2	29
47_27	27	2	2	18

34_4	4	1	1	10
37_4	4	1	1	11
38_4	4	1	1	14
41_4	4	1	1	1
42_4	4	1	1	12
43_4	4	1	1	10
46_4	4	1	1	5
49_4	4	1	1	7
52_4	4	1	1	2
53_4	4	1	1	5
54_4	4	1	2	21
55_4	4	1	1	13
56_4	4	1	1	4
58_4	4	1	1	18
59_4	4	1	2	20
60_4	4	1	1	16
61_4	4	1	1	2
63_4	4	1	1	8
64_4	4	1	2	19
65_4	4	1	1	5
66_4	4	1	1	6
67_4	4	1	1	6
68_4	4	1	1	7
69_4	4	1	1	10
73_4	4	1	1	6
74_4	4	1	1	0
76_4	4	1	1	6
77_4	4	1	1	2

47_13	13	1	1	9
52_13	13	1	2	23
53_13	13	1	1	12
54_13	13	1	1	10
58_13	13	1	1	20
65_13	13	1	2	23
68_13	13	1	2	23
69_13	13	1	2	18
72_13	13	1	1	13
73_13	13	1	1	9
74_13	13	1	1	8
76_13	13	1	1	8
77_13	13	1	1	14
78_13	13	1	2	20
79_13	13	1	1	18
8_13	13	1	2	23
80_13	13	1	2	23
9_13	13	1	1	11
1_14	14	1	2	22
11_14	14	1	1	20
12_14	14	1	1	9
14_14	14	1	1	12
15_14	14	1	1	12
16_14	14	1	2	23
22_14	14	1	2	27
23_14	14	1	1	19
28_14	14	1	1	20
31_14	14	1	1	21

48_27	27	2	2	24
71_27	27	2	1	10
72_27	27	2	1	8
82_27	27	2	2	26
1_28	28	2	2	31
18_28	28	2	1	7
22_28	28	2	2	24
24_28	28	2	2	31
25_28	28	2	2	24
28_28	28	2	2	18
32_28	28	2	2	22
4_28	28	2	2	26
42_28	28	2	2	24
45_28	28	2	2	25
6_28	28	2	2	28
67_28	28	2	2	24
1_29	29	2	2	32
17_29	29	2	2	22
18_29	29	2	2	26
2_29	29	2	2	25
23_29	29	2	2	19
29_29	29	2	2	24
61_29	29	2	2	24
72_29	29	2	2	22
8_29	29	2	2	14
11_30	30	2	2	24
12_30	30	2	2	12
13_30	30	2	2	30

78_4	4	1	1	8
79_4	4	1	1	2
80_4	4	1	1	9
81_4	4	1	2	12
1_5	5	1	1	7
10_5	5	1	1	4
11_5	5	1	1	7
15_5	5	1	1	7
16_5	5	1	1	4
17_5	5	1	1	12
19_5	5	1	1	19
2_5	5	1	1	17
21_5	5	1	1	11
23_5	5	1	1	20
24_5	5	1	1	5
29_5	5	1	1	15
30_5	5	1	1	11
33_5	5	1	1	7
35_5	5	1	1	2
36_5	5	1	1	9
38_5	5	1	1	11
39_5	5	1	1	13
40_5	5	1	1	9
42_5	5	1	1	1
43_5	5	1	1	0
44_5	5	1	1	17
47_5	5	1	1	18
49_5	5	1	1	8

33_14	14	1	1	16
35_14	14	1	1	14
38_14	14	1	1	11
40_14	14	1	1	21
42_14	14	1	2	20
46_14	14	1	2	23
50_14	14	1	2	25
51_14	14	1	1	20
52_14	14	1	2	25
55_14	14	1	1	14
59_14	14	1	2	23
67_14	14	1	1	19
68_14	14	1	1	9
70_14	14	1	1	11
72_14	14	1	2	14
73_14	14	1	1	18
74_14	14	1	1	21
76_14	14	1	1	18
77_14	14	1	1	15
78_14	14	1	1	15
80_14	14	1	1	21
9_14	14	1	1	8
10_15	15	1	1	10
11_15	15	1	1	15
15_15	15	1	1	15
17_15	15	1	2	24
19_15	15	1	1	16
2_15	15	1	1	17

14_30	30	2	1	10
19_30	30	2	1	11
20_30	30	2	2	24
21_30	30	2	2	22
22_30	30	2	1	17
24_30	30	2	2	24
27_30	30	2	1	21
33_30	30	2	2	21
34_30	30	2	2	26
4_30	30	2	1	9
48_30	30	2	2	24
5_30	30	2	2	27
61_30	30	2	2	25
62_30	30	2	2	27
67_30	30	2	2	25
8_30	30	2	2	21
2_31	31	2	1	19
29_31	31	2	2	28
5_31	31	2	2	28
6_31	31	2	2	29
8_31	31	2	2	21
82_31	31	2	2	27
12_32	32	2	1	18
17_32	32	2	2	16
45_32	32	2	2	26
61_32	32	2	2	28
1_33	33	2	2	29
18_33	33	2	1	17

51_5	5	1	1	9
55_5	5	1	1	7
57_5	5	1	1	11
58_5	5	1	2	21
60_5	5	1	1	5
69_5	5	1	1	6
70_5	5	1	1	8
73_5	5	1	1	7
74_5	5	1	1	4
75_5	5	1	1	10
76_5	5	1	1	7
78_5	5	1	1	4
79_5	5	1	1	1
80_5	5	1	1	10
81_5	5	1	1	8
9_5	5	1	1	4
10_6	6	1	1	4
18_6	6	1	1	10
21_6	6	1	1	9
26_6	6	1	1	17
31_6	6	1	1	12
32_6	6	1	1	7
36_6	6	1	1	15
37_6	6	1	1	6
40_6	6	1	1	12
41_6	6	1	1	8
42_6	6	1	1	3
45_6	6	1	1	5

25_15	15	1	2	25
26_15	15	1	1	9
31_15	15	1	2	27
32_15	15	1	2	24
34_15	15	1	2	26
36_15	15	1	1	17
39_15	15	1	1	14
43_15	15	1	1	17
44_15	15	1	2	18
47_15	15	1	1	17
48_15	15	1	2	23
49_15	15	1	1	21
51_15	15	1	1	12
53_15	15	1	2	21
56_15	15	1	2	22
58_15	15	1	2	21
61_15	15	1	1	19
62_15	15	1	2	25
64_15	15	1	1	13
73_15	15	1	1	21
74_15	15	1	1	17
76_15	15	1	1	21
77_15	15	1	1	15
78_15	15	1	1	21
1_16	16	1	2	23
10_16	16	1	1	14
13_16	16	1	1	11
14_16	16	1	1	11

29_33	33	2	2	24
32_33	33	2	1	16
47_33	33	2	2	12
48_33	33	2	1	13
63_33	33	2	2	30
67_33	33	2	1	20
8_33	33	2	2	20
11_34	34	2	2	25
12_34	34	2	1	5
13_34	34	2	1	19
18_34	34	2	2	16
25_34	34	2	2	24
28_34	34	2	2	16
38_34	34	2	2	22
72_34	34	2	2	28
21_35	35	2	2	25
28_35	35	2	2	25
3_35	35	2	2	28
32_35	35	2	2	22
33_35	35	2	2	21
34_35	35	2	2	21
39_35	35	2	1	14
5_35	35	2	2	28
62_35	35	2	2	25
71_35	35	2	2	25
8_35	35	2	2	19
12_36	36	2	1	15
14_36	36	2	2	21

46_6	6	1	1	11
47_6	6	1	1	15
49_6	6	1	1	3
50_6	6	1	1	8
53_6	6	1	1	10
54_6	6	1	1	13
55_6	6	1	1	8
56_6	6	1	1	10
57_6	6	1	1	10
58_6	6	1	1	16
59_6	6	1	1	10
60_6	6	1	1	2
61_6	6	1	2	20
65_6	6	1	1	9
65_6	6	1	1	6
66_6	6	1	1	7
66_6	6	1	1	9
69_6	6	1	1	10
70_6	6	1	1	4
73_6	6	1	1	7
74_6	6	1	1	3
75_6	6	1	1	5
76_6	6	1	1	7
77_6	6	1	1	9
78_6	6	1	1	21
79_6	6	1	1	11
8_6	6	1	1	9
80_6	6	1	1	10

16_16	16	1	1	16
18_16	16	1	2	26
2_16	16	1	2	23
20_16	16	1	1	15
21_16	16	1	2	25
22_16	16	1	2	24
23_16	16	1	2	27
27_16	16	1	2	21
28_16	16	1	1	13
29_16	16	1	2	27
30_16	16	1	2	25
31_16	16	1	2	22
34_16	16	1	2	27
35_16	16	1	1	16
39_16	16	1	2	17
40_16	16	1	2	25
46_16	16	1	1	21
48_16	16	1	2	23
49_16	16	1	2	24
50_16	16	1	2	14
51_16	16	1	2	21
52_16	16	1	2	28
54_16	16	1	2	24
57_16	16	1	2	22
59_16	16	1	1	19
62_16	16	1	1	12
73_16	16	1	1	11
76_16	16	1	1	12

17_36	36	2	2	29
18_36	36	2	2	22
2_36	36	2	2	23
20_36	36	2	2	21
27_36	36	2	1	19
6_36	36	2	2	32
28_37	37	2	1	16
4_37	37	2	2	19
7_37	37	2	2	21
17_38	38	2	2	27
2_38	38	2	2	17
3_38	38	2	2	25
62_38	38	2	2	25
7_38	38	2	2	22
21_39	39	2	2	25
25_39	39	2	2	20
33_39	39	2	1	17
34_39	39	2	2	24
67_39	39	2	1	16
7_39	39	2	2	22
1_40	40	2	1	23
11_40	40	2	2	26
14_40	40	2	1	14
32_40	40	2	2	25
4_40	40	2	2	24
45_40	40	2	2	21
5_40	40	2	2	18
6_40	40	2	2	30

81_6	6	1	1	16
10_7	7	1	1	7
10_7	7	1	1	2
11_7	7	1	1	6
12_7	7	1	1	7
15_7	7	1	1	11
16_7	7	1	1	11
17_7	7	1	1	5
19_7	7	1	1	14
2_7	7	1	2	16
22_7	7	1	1	10
23_7	7	1	1	12
24_7	7	1	1	19
25_7	7	1	1	11
26_7	7	1	1	8
30_7	7	1	1	17
31_7	7	1	1	11
35_7	7	1	1	7
39_7	7	1	1	11
40_7	7	1	1	9
44_7	7	1	1	13
49_7	7	1	1	12
52_7	7	1	1	15
57_7	7	1	1	11
59_7	7	1	1	11
60_7	7	1	2	22
61_7	7	1	1	10
65_7	7	1	1	9

77_16	16	1	1	11
8_16	16	1	2	22
82_16	16	1	2	26
9_16	16	1	1	10
9_16	16	1	1	14
11_17	17	1	1	18
15_17	17	1	1	16
16_17	17	1	2	24
17_17	17	1	1	30
24_17	17	1	2	24
26_17	17	1	1	16
30_17	17	1	2	27
36_17	17	1	1	21
37_17	17	1	1	18
38_17	17	1	1	18
39_17	17	1	2	23
43_17	17	1	2	19
44_17	17	1	2	17
45_17	17	1	2	22
46_17	17	1	1	16
48_17	17	1	1	16
49_17	17	1	2	20
51_17	17	1	2	20
52_17	17	1	2	26
54_17	17	1	2	23
57_17	17	1	2	26
58_17	17	1	1	11
60_17	17	1	2	25

71_40	40	2	2	22
13_41	41	2	1	14
27_41	41	2	2	19
28_41	41	2	1	15
62_41	41	2	2	22
72_41	41	2	2	22
8_41	41	2	2	22
11_42	42	2	2	25
14_42	42	2	1	16
17_42	42	2	2	32
6_42	42	2	2	30
71_42	42	2	1	17
1_43	43	2	2	30
1_43	43	2	2	33
45_43	43	2	2	27
71_43	43	2	1	12
13_44	44	2	2	31
33_44	44	2	2	21
34_44	44	2	2	22
71_44	44	2	2	23
39_45	45	2	2	25
47_45	45	2	2	26
5_45	45	2	2	23
62_45	45	2	1	14
7_45	45	2	2	15
71_45	45	2	2	20
72_45	45	2	1	15
28_46	46	2	1	17

65_7	7	1	1	11
66_7	7	1	1	10
69_7	7	1	1	5
70_7	7	1	1	6
72_7	7	1	1	7
73_7	7	1	1	7
74_7	7	1	1	12
75_7	7	1	1	5
76_7	7	1	1	6
77_7	7	1	1	16
78_7	7	1	2	25
79_7	7	1	1	12
80_7	7	1	1	13
81_7	7	1	1	10
1_8	8	1	1	11
13_8	8	1	1	16
16_8	8	1	1	8
20_8	8	1	1	4
32_8	8	1	1	6
35_8	8	1	2	16
36_8	8	1	1	10
37_8	8	1	1	6
38_8	8	1	1	7
42_8	8	1	1	16
45_8	8	1	1	10
46_8	8	1	1	19
49_8	8	1	1	16
51_8	8	1	1	10

61_17	17	1	2	21
67_17	17	1	1	10
72_17	17	1	1	12
76_17	17	1	1	15
8_17	17	1	2	18
1_18	18	2	2	25
10_18	18	2	1	9
12_18	18	2	1	11
13_18	18	2	1	22
14_18	18	2	1	16
16_18	18	2	2	26
18_18	18	2	2	18
19_18	18	2	2	21
2_18	18	2	2	26
20_18	18	2	2	22
21_18	18	2	2	23
22_18	18	2	1	17
23_18	18	2	2	13
24_18	18	2	2	28
25_18	18	2	1	16
26_18	18	2	2	21
27_18	18	2	2	22
28_18	18	2	1	14
3_18	18	2	2	30
30_18	18	2	1	21
32_18	18	2	2	24
33_18	18	2	2	21
34_18	18	2	2	20

48_46	46	2	1	18
6_46	46	2	2	29
3_47	47	2	2	33
62_47	47	2	1	21
4_48	48	2	2	26
45_48	48	2	2	17
5_48	48	2	1	22
3_49	49	2	2	30
48_49	49	2	2	19
5_49	49	2	2	21
39_50	50	2	2	25
48_50	50	2	2	20
3_51	51	2	2	25
4_51	51	2	2	21
6_51	51	2	2	29
39_52	52	2	2	22
48_52	52	2	2	28
5_52	52	2	2	23
4_53	53	2	2	26
62_53	53	2	1	20
48_54	54	2	2	23
62_54	54	2	2	20
47_55	55	2	2	24
6_55	55	2	2	28
3_58	58	2	2	29
3_60	60	2	2	21
3_61	61	2	2	24
5_61	61	2	2	31



53_8	8	1	1	12
55_8	8	1	1	3
60_8	8	1	1	13
63_8	8	1	1	12
65_8	8	1	1	11

35_18	18	2	2	20
36_18	18	2	2	21
37_18	18	2	1	18
42_18	18	2	2	16
44_18	18	2	2	23

6_61	61	2	2	26
4_62	62	2	2	22
4_63	63	2	2	27
6_67	67	2	2	29
6_69	69	2	2	33

## APPENDIX B Anthropometric model results for Fg-net database

Image ID	Actual Age	Estimated Age
9_0	0	3
13_0	0	3
15_0	0	3
19_0	0	3
22_0	0	3
23_0	0	3
24_0	0	3
25_0	0	4
26_0	0	3
30_0	0	8
31_0	0	3
35_0	0	4
36_0	0	5
37_0	0	3
38_0	0	2
40_0	0	10
41_0	0	3
42_0	0	3
43_0	0	3
46_0	0	3
48_0	0	4
50_0	0	3
51_0	0	3

Image ID	Actual Age	Estimated Age
54_6	6	8
55_6	6	17
56_6	6	11
57_6	6	9
58_6	6	14
59_6	6	11
60_6	6	0
61_6	6	12
65_6	6	9
65_6	6	6
66_6	6	4
66_6	6	13
69_6	6	13
70_6	6	5
73_6	6	7
74_6	6	6
75_6	6	4
76_6	6	5
77_6	6	5
78_6	6	22
79_6	6	6
80_6	6	5
81_6	6	9

Image ID	Actual Age	Estimated Age
65_13	13	31
68_13	13	22
69_13	13	21
72_13	13	23
73_13	13	17
74_13	13	11
76_13	13	9
77_13	13	11
78_13	13	25
79_13	13	15
80_13	13	26
1_14	14	21
9_14	14	10
11_14	14	18
12_14	14	9
14_14	14	16
15_14	14	9
16_14	14	26
22_14	14	24
23_14	14	20
28_14	14	20
31_14	14	21
33_14	14	8

Image ID	Actual Age	Estimated Age
18_22	22	16
20_22	22	22
23_22	22	24
25_22	22	16
27_22	22	24
29_22	22	23
50_22	22	21
55_22	22	12
63_22	22	17
71_22	22	15
82_22	22	29
2_23	23	27
3_23	23	35
7_23	23	13
12_23	23	35
13_23	23	13
19_23	23	26
21_23	23	26
22_23	23	18
24_23	23	24
25_23	23	21
29_23	23	24
30_23	23	22

53_0	0	8
54_0	0	6
57_0	0	3
58_0	0	14
63_0	0	5
66_0	0	3
68_0	0	4
69_0	0	3
70_0	0	3
71_0	0	8
73_0	0	3
74_0	0	3
75_0	0	3
76_0	0	3
77_0	0	3
78_0	0	3
79_0	0	3
80_0	0	4
81_0	0	3
82_0	0	3
7_1	1	3
9_1	1	3
10_1	1	3
15_1	1	3
16_1	1	5
29_1	1	13
35_1	1	3
36_1	1	5

2_7	7	10
10_7	7	5
10_7	7	5
11_7	7	9
12_7	7	5
15_7	7	8
16_7	7	15
17_7	7	7
19_7	7	14
22_7	7	18
23_7	7	19
24_7	7	9
25_7	7	14
26_7	7	15
30_7	7	17
31_7	7	13
35_7	7	12
39_7	7	20
40_7	7	9
44_7	7	22
49_7	7	14
52_7	7	22
57_7	7	19
59_7	7	20
60_7	7	23
61_7	7	10
65_7	7	8
65_7	7	11

35_14	14	17
38_14	14	23
40_14	14	18
42_14	14	18
46_14	14	21
50_14	14	28
51_14	14	22
52_14	14	29
55_14	14	22
59_14	14	25
67_14	14	22
68_14	14	9
70_14	14	19
72_14	14	17
73_14	14	22
74_14	14	22
76_14	14	16
77_14	14	18
78_14	14	10
80_14	14	21
2_15	15	19
10_15	15	18
11_15	15	20
15_15	15	18
17_15	15	24
19_15	15	18
25_15	15	19
26_15	15	16

35_23	23	28
35_23	23	23
38_23	23	19
43_23	23	26
47_23	23	10
55_23	23	24
57_23	23	17
67_23	23	23
71_23	23	19
82_23	23	22
5_24	24	19
6_24	24	26
12_24	24	23
20_24	24	23
32_24	24	16
41_24	24	19
42_24	24	26
51_24	24	30
71_24	24	19
3_25	25	35
12_25	25	21
13_25	25	20
18_25	25	26
22_25	25	16
23_25	25	22
24_25	25	25
27_25	25	28
33_25	25	8

37_1	1	4
38_1	1	8
42_1	1	3
44_1	1	3
46_1	1	15
53_1	1	8
56_1	1	3
58_1	1	22
64_1	1	4
70_1	1	4
73_1	1	4
74_1	1	3
75_1	1	4
76_1	1	3
77_1	1	3
78_1	1	3
79_1	1	8
80_1	1	4
81_1	1	3
1_2	2	3
11_2	2	3
20_2	2	8
26_2	2	5
27_2	2	14
31_2	2	9
33_2	2	3
34_2	2	3
37_2	2	2

66_7	7	22
69_7	7	6
70_7	7	14
72_7	7	11
73_7	7	5
74_7	7	8
75_7	7	7
76_7	7	4
77_7	7	14
78_7	7	20
79_7	7	10
80_7	7	13
81_7	7	8
1_8	8	7
8_8	8	13
13_8	8	6
16_8	8	7
20_8	8	4
32_8	8	9
35_8	8	13
36_8	8	18
37_8	8	5
38_8	8	10
42_8	8	22
45_8	8	6
46_8	8	18
49_8	8	17
51_8	8	13

31_15	15	22
32_15	15	15
34_15	15	24
36_15	15	14
39_15	15	14
43_15	15	19
44_15	15	23
47_15	15	10
48_15	15	23
49_15	15	21
51_15	15	16
53_15	15	22
56_15	15	21
58_15	15	16
61_15	15	20
62_15	15	23
64_15	15	22
73_15	15	12
74_15	15	26
76_15	15	23
77_15	15	21
78_15	15	20
1_16	16	22
2_16	16	25
8_16	16	19
9_16	16	8
9_16	16	12
10_16	16	21

34_25	25	28
44_25	25	24
45_25	25	26
57_25	25	19
61_25	25	16
63_25	25	20
72_25	25	21
82_25	25	26
2_26	26	25
4_26	26	25
7_26	26	16
12_26	26	22
17_26	26	22
20_26	26	26
22_26	26	21
28_26	26	23
30_26	26	23
61_26	26	20
67_26	26	19
11_27	27	28
12_27	27	18
19_27	27	25
21_27	27	23
22_27	27	23
43_27	27	24
47_27	27	9
48_27	27	21
71_27	27	11

39_2	2	8
40_2	2	9
41_2	2	3
46_2	2	7
51_2	2	7
52_2	2	4
53_2	2	5
54_2	2	27
56_2	2	5
58_2	2	7
59_2	2	15
59_2	2	10
60_2	2	8
63_2	2	6
65_2	2	3
65_2	2	3
66_2	2	5
66_2	2	10
69_2	2	12
70_2	2	4
72_2	2	7
73_2	2	8
74_2	2	5
75_2	2	4
76_2	2	3
77_2	2	3
78_2	2	11
79_2	2	7

53_8	8	20
55_8	8	5
60_8	8	19
63_8	8	22
65_8	8	7
66_8	8	13
70_8	8	3
73_8	8	7
74_8	8	7
75_8	8	8
76_8	8	4
77_8	8	7
78_8	8	17
79_8	8	6
80_8	8	17
81_8	8	11
9_9	9	5
10_9	9	19
15_9	9	18
23_9	9	17
31_9	9	21
35_9	9	18
37_9	9	15
40_9	9	15
41_9	9	15
47_9	9	13
48_9	9	15
54_9	9	28

13_16	16	18
14_16	16	21
16_16	16	23
18_16	16	26
20_16	16	19
21_16	16	24
22_16	16	22
23_16	16	19
27_16	16	27
28_16	16	12
29_16	16	17
30_16	16	25
31_16	16	20
34_16	16	24
35_16	16	12
39_16	16	22
40_16	16	23
46_16	16	24
48_16	16	25
49_16	16	22
50_16	16	15
51_16	16	21
52_16	16	26
54_16	16	25
57_16	16	22
59_16	16	19
62_16	16	5
73_16	16	20

72_27	27	18
82_27	27	25
1_28	28	28
4_28	28	23
6_28	28	23
18_28	28	4
22_28	28	19
24_28	28	24
25_28	28	20
28_28	28	16
32_28	28	20
42_28	28	25
45_28	28	28
67_28	28	18
1_29	29	32
2_29	29	28
8_29	29	32
17_29	29	17
18_29	29	27
23_29	29	25
29_29	29	28
61_29	29	19
72_29	29	29
4_30	30	12
5_30	30	24
8_30	30	26
11_30	30	24
12_30	30	22

80_2	2	4
81_2	2	10
2_3	3	12
8_3	3	3
9_3	3	5
14_3	3	3
15_3	3	4
16_3	3	9
19_3	3	3
21_3	3	5
23_3	3	3
25_3	3	12
31_3	3	5
35_3	3	3
36_3	3	6
38_3	3	8
40_3	3	19
40_3	3	14
43_3	3	5
44_3	3	5
45_3	3	4
50_3	3	6
53_3	3	6
56_3	3	6
58_3	3	18
59_3	3	13
62_3	3	12
64_3	3	8

63_9	9	23
65_9	9	9
66_9	9	23
68_9	9	8
69_9	9	20
70_9	9	11
73_9	9	8
74_9	9	8
76_9	9	8
77_9	9	13
78_9	9	14
79_9	9	10
80_9	9	11
1_10	10	15
10_10	10	3
15_10	10	10
16_10	10	11
24_10	10	22
29_10	10	13
30_10	10	15
32_10	10	15
33_10	10	13
38_10	10	14
39_10	10	14
40_10	10	20
42_10	10	22
43_10	10	17
46_10	10	9

76_16	16	13
77_16	16	20
82_16	16	22
8_17	17	16
11_17	17	15
15_17	17	24
16_17	17	24
17_17	17	18
24_17	17	23
26_17	17	17
30_17	17	20
36_17	17	18
37_17	17	18
38_17	17	22
39_17	17	25
43_17	17	13
44_17	17	20
45_17	17	23
46_17	17	23
48_17	17	15
49_17	17	20
51_17	17	21
52_17	17	26
54_17	17	20
57_17	17	20
58_17	17	17
60_17	17	13
61_17	17	21

13_30	30	24
14_30	30	20
19_30	30	15
20_30	30	28
21_30	30	23
22_30	30	10
24_30	30	26
27_30	30	26
33_30	30	22
34_30	30	30
48_30	30	19
61_30	30	22
62_30	30	31
67_30	30	24
2_31	31	25
5_31	31	25
6_31	31	23
8_31	31	23
29_31	31	22
82_31	31	30
12_32	32	17
17_32	32	19
45_32	32	26
61_32	32	14
1_33	33	26
8_33	33	19
18_33	33	12
29_33	33	22

65_3	3	4
65_3	3	6
66_3	3	6
68_3	3	4
69_3	3	5
70_3	3	4
73_3	3	5
74_3	3	8
75_3	3	5
76_3	3	3
77_3	3	4
78_3	3	4
79_3	3	4
80_3	3	3
81_3	3	5
82_3	3	5
2_4	4	18
10_4	4	4
12_4	4	15
15_4	4	5
16_4	4	1
20_4	4	4
26_4	4	9
29_4	4	21
30_4	4	24
31_4	4	4
34_4	4	4
37_4	4	8

48_10	10	11
49_10	10	18
50_10	10	27
52_10	10	22
53_10	10	20
54_10	10	14
56_10	10	20
58_10	10	19
60_10	10	7
61_10	10	34
64_10	10	25
65_10	10	22
66_10	10	19
68_10	10	11
68_10	10	6
69_10	10	24
71_10	10	23
74_10	10	12
75_10	10	14
76_10	10	6
77_10	10	11
78_10	10	24
79_10	10	12
80_10	10	7
81_10	10	19
9_11	11	4
11_11	11	11
18_11	11	24

67_17	17	19
72_17	17	19
76_17	17	16
1_18	18	24
2_18	18	22
3_18	18	30
5_18	18	24
7_18	18	17
8_18	18	23
9_18	18	16
10_18	18	7
12_18	18	13
13_18	18	17
14_18	18	22
16_18	18	25
18_18	18	17
19_18	18	25
20_18	18	19
21_18	18	23
22_18	18	11
23_18	18	13
24_18	18	22
25_18	18	11
26_18	18	26
27_18	18	23
28_18	18	14
30_18	18	22
32_18	18	12

32_33	33	21
47_33	33	20
48_33	33	10
63_33	33	21
67_33	33	22
11_34	34	26
12_34	34	15
13_34	34	16
18_34	34	17
25_34	34	20
28_34	34	17
38_34	34	23
72_34	34	28
3_35	35	36
5_35	35	23
8_35	35	21
21_35	35	23
28_35	35	32
32_35	35	19
33_35	35	23
34_35	35	23
39_35	35	16
62_35	35	30
71_35	35	27
2_36	36	28
6_36	36	32
12_36	36	16
14_36	36	26

38_4	4	13
41_4	4	7
42_4	4	15
43_4	4	22
46_4	4	12
49_4	4	11
52_4	4	8
53_4	4	14
54_4	4	21
55_4	4	6
56_4	4	8
58_4	4	22
59_4	4	19
60_4	4	20
61_4	4	4
63_4	4	5
64_4	4	20
65_4	4	3
66_4	4	9
67_4	4	7
68_4	4	5
69_4	4	7
73_4	4	6
74_4	4	3
76_4	4	5
77_4	4	4
78_4	4	18
79_4	4	7

20_11	11	28
21_11	11	20
22_11	11	9
26_11	11	17
27_11	11	15
29_11	11	23
31_11	11	22
34_11	11	22
36_11	11	8
37_11	11	18
38_11	11	19
39_11	11	16
47_11	11	16
48_11	11	6
53_11	11	13
54_11	11	19
60_11	11	20
65_11	11	14
66_11	11	15
68_11	11	21
69_11	11	15
72_11	11	11
73_11	11	20
74_11	11	13
75_11	11	14
76_11	11	13
77_11	11	6
78_11	11	23

33_18	18	21
34_18	18	22
35_18	18	22
36_18	18	20
37_18	18	11
42_18	18	21
44_18	18	24
45_18	18	24
46_18	18	17
47_18	18	17
48_18	18	19
50_18	18	25
51_18	18	28
52_18	18	25
53_18	18	25
54_18	18	21
57_18	18	17
61_18	18	20
62_18	18	22
63_18	18	22
71_18	18	13
82_18	18	25
1_19	19	24
4_19	19	22
13_19	19	18
15_19	19	19
16_19	19	22
17_19	19	21

17_36	36	25
18_36	36	20
20_36	36	21
27_36	36	25
4_37	37	26
7_37	37	21
28_37	37	15
2_38	38	20
3_38	38	36
7_38	38	19
17_38	38	23
62_38	38	20
7_39	39	19
21_39	39	24
25_39	39	21
33_39	39	15
34_39	39	32
67_39	39	18
1_40	40	27
4_40	40	27
5_40	40	16
6_40	40	24
11_40	40	22
14_40	40	31
32_40	40	24
45_40	40	33
71_40	40	28
8_41	41	22



80_4	4	9
81_4	4	13
1_5	5	4
2_5	5	12
9_5	5	5
10_5	5	4
11_5	5	6
15_5	5	4
16_5	5	10
17_5	5	14
19_5	5	19
21_5	5	7
23_5	5	19
24_5	5	5
29_5	5	15
30_5	5	16
33_5	5	5
35_5	5	9
36_5	5	17
38_5	5	14
39_5	5	15
40_5	5	22
42_5	5	8
43_5	5	3
44_5	5	23
47_5	5	17
49_5	5	4
51_5	5	6

79_11	11	11
81_11	11	25
2_12	12	20
8_12	12	20
10_12	12	12
12_12	12	15
14_12	12	18
15_12	12	10
16_12	12	20
17_12	12	17
19_12	12	21
25_12	12	23
31_12	12	20
35_12	12	5
40_12	12	23
42_12	12	22
45_12	12	15
46_12	12	21
47_12	12	6
49_12	12	21
51_12	12	19
53_12	12	21
54_12	12	20
55_12	12	21
56_12	12	8
57_12	12	12
59_12	12	15
60_12	12	14

24_19	19	23
25_19	19	22
26_19	19	26
31_19	19	24
36_19	19	21
37_19	19	16
39_19	19	18
40_19	19	23
41_19	19	11
43_19	19	21
45_19	19	20
52_19	19	23
54_19	19	28
60_19	19	18
61_19	19	14
64_19	19	24
72_19	19	22
2_20	20	24
3_20	20	30
11_20	20	23
20_20	20	11
21_20	20	22
22_20	20	7
27_20	20	27
28_20	20	18
29_20	20	26
30_20	20	20
32_20	20	16

13_41	41	18
27_41	41	24
28_41	41	21
62_41	41	26
72_41	41	27
6_42	42	14
11_42	42	32
14_42	42	23
17_42	42	22
71_42	42	21
1_43	43	27
1_43	43	26
45_43	43	26
71_43	43	16
13_44	44	26
33_44	44	16
34_44	44	24
71_44	44	21
5_45	45	23
7_45	45	17
39_45	45	23
47_45	45	15
62_45	45	21
71_45	45	22
72_45	45	34
6_46	46	26
28_46	46	18
48_46	46	19

55_5	5	19
57_5	5	12
58_5	5	20
60_5	5	10
69_5	5	6
70_5	5	11
73_5	5	5
74_5	5	4
75_5	5	5
76_5	5	4
78_5	5	5
79_5	5	6
80_5	5	6
81_5	5	5
8_6	6	10
10_6	6	4
18_6	6	9
21_6	6	13
26_6	6	18
31_6	6	23
32_6	6	6
36_6	6	13
37_6	6	5
40_6	6	16
41_6	6	7
42_6	6	7
45_6	6	11
46_6	6	13

65_12	12	14
68_12	12	15
70_12	12	12
73_12	12	19
74_12	12	16
76_12	12	7
77_12	12	17
78_12	12	16
79_12	12	12
80_12	12	18
81_12	12	13
8_13	13	22
9_13	13	17
11_13	13	19
20_13	13	15
26_13	13	19
27_13	13	21
29_13	13	15
32_13	13	10
34_13	13	28
36_13	13	22
37_13	13	6
38_13	13	11
39_13	13	16
41_13	13	11
43_13	13	12
44_13	13	22
47_13	13	9

36_20	20	22
41_20	20	19
42_20	20	22
46_20	20	20
47_20	20	20
52_20	20	25
60_20	20	15
63_20	20	22
82_20	20	22
2_21	21	27
4_21	21	17
8_21	21	24
12_21	21	22
13_21	21	8
23_21	21	23
33_21	21	17
34_21	21	23
35_21	21	22
38_21	21	23
40_21	21	23
41_21	21	18
44_21	21	18
67_21	21	21
72_21	21	28
82_21	21	19
1_22	22	21
7_22	22	23
9_22	22	16

3_47	47	21
62_47	47	18
4_48	48	25
5_48	48	21
45_48	48	20
3_49	49	28
5_49	49	28
48_49	49	18
39_50	50	25
48_50	50	14
3_51	51	30
4_51	51	25
6_51	51	26
5_52	52	22
39_52	52	20
48_52	52	24
4_53	53	27
62_53	53	18
48_54	54	13
62_54	54	17
6_55	55	32
47_55	55	19
3_58	58	25
3_60	60	30
3_61	61	35
5_61	61	20
6_61	61	16
4_62	62	20

47_6	6	14
49_6	6	4
50_6	6	18
53_6	6	20

52_13	13	22
53_13	13	19
54_13	13	4
58_13	13	15

9_22	22	10
14_22	22	24
17_22	22	18

4_63	63	26
6_67	67	25
6_69	69	31

## APPENDIX C New algorithm results for Private database

Image ID	Actual Age	Estimated Age
006_00	0	2
010_00	0	3
142_00	0	2
144_00	0	3
175_00	0	2
177_00	0	3
178_00	0	11
179_00	0	6
206_00	0	4
210_00	0	1
249_00	0	2
005_01	1	5
011_01	1	4
012_01	1	4
021_01	1	0
025_01	1	2
026_01	1	3
044_01	1	5
048_01	1	2
049_01	1	1
052_01	1	3
053_01	1	6

Image ID	Actual Age	Estimated Age
138_05	5	14
141_05	5	3
150_05	5	10
151_05	5	9
167_05	5	11
169_05	5	5
172_05	5	14
175_05	5	12
176_05	5	9
178_05	5	8
185_05	5	6
199_05	5	10
200_05	5	4
202_05	5	7
234_05	5	8
247_05	5	5
251_05	5	12
252_05	5	3
003_06	6	10
006_06	6	8
007_06	6	6
009_06	6	8

Image ID	Actual Age	Estimated Age
134_10	10	13
135_10	10	14
138_10	10	15
140_10	10	13
143_10	10	9
144_10	10	14
154_10	10	16
164_10	10	8
166_10	10	8
175_10	10	10
177_10	10	14
180_10	10	16
184_10	10	8
189_10	10	17
199_10	10	11
200_10	10	12
206_10	10	10
209_10	10	12
210_10	10	12
215_10	10	15
224_10	10	9
235_10	10	13

Image ID	Actual Age	Estimated Age
147_16	16	17
151_16	16	17
157_16	16	14
165_16	16	12
167_16	16	16
170_16	16	15
172_16	16	16
179_16	16	13
183_16	16	17
189_16	16	16
202_16	16	12
203_16	16	16
207_16	16	16
209_16	16	17
222_16	16	12
225_16	16	13
229_16	16	12
234_16	16	18
239_16	16	8
242_16	16	7
244_16	16	15
248_16	16	15

055_01	1	2
058_01	1	3
069_01	1	4
071_01	1	1
075_01	1	5
077_01	1	4
078_01	1	2
090_01	1	2
099_01	1	3
102_01	1	2
103_01	1	2
104_01	1	6
114_01	1	4
115_01	1	2
119_01	1	5
120_01	1	1
121_01	1	2
123_01	1	1
124_01	1	3
132_01	1	2
137_01	1	2
138_01	1	5
144_01	1	3
164_01	1	3
168_01	1	2
169_01	1	2
172_01	1	4
174_01	1	2

013_06	6	8
021_06	6	11
025_06	6	3
040_06	6	15
043_06	6	12
048_06	6	13
049_06	6	15
056_06	6	12
063_06	6	12
065_06	6	7
085_06	6	8
086_06	6	9
103_06	6	8
112_06	6	9
127_06	6	2
144_06	6	7
145_06	6	9
149_06	6	2
150_06	6	9
158_06	6	5
177_06	6	14
178_06	6	16
187_06	6	10
191_06	6	9
192_06	6	4
194_06	6	2
201_06	6	10
210_06	6	4

239_10	10	4
240_10	10	12
242_10	10	15
243_10	10	8
251_10	10	10
252_10	10	14
008_11	11	8
039_11	11	11
050_11	11	12
060_11	11	8
071_11	11	14
072_11	11	9
086_11	11	15
119_11	11	11
130_11	11	17
132_11	11	10
136_11	11	16
142_11	11	15
149_11	11	15
150_11	11	15
155_11	11	8
157_11	11	12
165_11	11	10
173_11	11	4
177_11	11	9
185_11	11	8
213_11	11	17
214_11	11	12

252_16	16	15
002_17	17	11
007_17	17	11
024_17	17	16
028_17	17	17
032_17	17	17
036_17	17	12
050_17	17	16
051_17	17	15
053_17	17	14
074_17	17	11
081_17	17	17
082_17	17	14
098_17	17	16
103_17	17	14
118_17	17	14
127_17	17	11
129_17	17	13
134_17	17	14
139_17	17	11
142_17	17	17
144_17	17	17
149_17	17	17
187_17	17	17
212_17	17	17
224_17	17	10
225_17	17	7
228_17	17	15

181_01	1	8
187_01	1	4
189_01	1	5
198_01	1	2
201_01	1	3
202_01	1	2
203_01	1	2
208_01	1	10
210_01	1	0
218_01	1	8
234_01	1	2
237_01	1	2
239_01	1	6
251_01	1	2
252_01	1	6
003_02	2	8
009_02	2	8
019_02	2	2
020_02	2	7
022_02	2	2
023_02	2	2
025_02	2	2
028_02	2	8
029_02	2	2
032_02	2	10
036_02	2	4
037_02	2	2
042_02	2	3

211_06	6	7
224_06	6	2
226_06	6	4
241_06	6	4
242_06	6	3
245_06	6	5
250_06	6	5
253_06	6	8
001_07	7	17
002_07	7	7
014_07	7	7
022_07	7	9
026_07	7	17
027_07	7	9
034_07	7	7
035_07	7	10
039_07	7	5
042_07	7	16
048_07	7	12
055_07	7	10
057_07	7	9
066_07	7	16
070_07	7	7
072_07	7	11
073_07	7	12
076_07	7	17
084_07	7	12
091_07	7	6

228_11	11	14
229_11	11	16
236_11	11	5
237_11	11	12
002_12	12	15
003_12	12	8
027_12	12	15
041_12	12	14
049_12	12	13
052_12	12	10
068_12	12	9
073_12	12	16
074_12	12	14
082_12	12	12
095_12	12	15
105_12	12	12
117_12	12	13
123_12	12	8
124_12	12	17
139_12	12	10
148_12	12	17
160_12	12	13
162_12	12	17
170_12	12	10
174_12	12	15
195_12	12	12
208_12	12	17
212_12	12	12

235_17	17	12
252_17	17	17
005_18	18	16
006_18	18	15
021_18	18	13
023_18	18	11
024_18	18	17
028_18	18	18
030_18	18	16
039_18	18	13
041_18	18	14
043_18	18	14
046_18	18	15
049_18	18	16
052_18	18	14
059_18	18	14
066_18	18	18
070_18	18	16
071_18	18	12
078_18	18	17
079_18	18	17
090_18	18	12
091_18	18	12
098_18	18	15
116_18	18	16
120_18	18	13
126_18	18	11
131_18	18	9

047_02	2	1
049_02	2	6
059_02	2	3
065_02	2	2
067_02	2	6
081_02	2	4
084_02	2	3
086_02	2	5
097_02	2	3
102_02	2	5
109_02	2	3
111_02	2	2
112_02	2	10
113_02	2	4
117_02	2	11
118_02	2	2
128_02	2	6
129_02	2	5
130_02	2	9
143_02	2	4
148_02	2	3
149_02	2	2
157_02	2	2
176_02	2	4
179_02	2	1
192_02	2	2
200_02	2	5
203_02	2	2

092_07	7	13
094_07	7	9
095_07	7	10
097_07	7	15
114_07	7	13
115_07	7	12
126_07	7	5
132_07	7	7
137_07	7	13
140_07	7	11
142_07	7	11
144_07	7	6
152_07	7	3
154_07	7	10
157_07	7	5
159_07	7	8
161_07	7	12
164_07	7	10
165_07	7	7
177_07	7	8
181_07	7	3
183_07	7	6
184_07	7	5
195_07	7	10
196_07	7	10
200_07	7	2
201_07	7	11
205_07	7	15

238_12	12	16
241_12	12	14
244_12	12	17
250_12	12	11
009_13	13	15
028_13	13	16
032_13	13	17
049_13	13	11
051_13	13	14
078_13	13	15
114_13	13	17
115_13	13	15
127_13	13	10
175_13	13	12
177_13	13	13
182_13	13	13
202_13	13	11
206_13	13	14
207_13	13	10
007_14	14	8
024_14	14	7
035_14	14	16
036_14	14	16
038_14	14	11
043_14	14	14
049_14	14	16
061_14	14	11
069_14	14	14

132_18	18	7
141_18	18	12
155_18	18	17
157_18	18	17
158_18	18	13
159_18	18	14
165_18	18	16
166_18	18	15
168_18	18	10
176_18	18	17
177_18	18	12
179_18	18	11
182_18	18	16
184_18	18	17
185_18	18	10
191_18	18	7
204_18	18	17
209_18	18	15
213_18	18	17
222_18	18	16
226_18	18	15
229_18	18	11
237_18	18	15
241_18	18	12
017_19	19	16
020_19	19	13
023_19	19	12
024_19	19	17

207_02	2	7
215_02	2	4
224_02	2	2
225_02	2	1
233_02	2	2
241_02	2	2
243_02	2	2
246_02	2	2
247_02	2	4
253_02	2	3
009_03	3	11
014_03	3	2
023_03	3	2
031_03	3	4
039_03	3	8
040_03	3	6
043_03	3	6
049_03	3	6
054_03	3	8
064_03	3	2
066_03	3	6
070_03	3	2
072_03	3	5
073_03	3	0
075_03	3	5
076_03	3	11
086_03	3	8
092_03	3	10

206_07	7	11
207_07	7	16
208_07	7	16
209_07	7	6
215_07	7	7
218_07	7	5
229_07	7	9
236_07	7	11
238_07	7	14
239_07	7	9
249_07	7	8
003_08	8	7
019_08	8	2
024_08	8	3
048_08	8	14
049_08	8	14
050_08	8	9
052_08	8	13
068_08	8	14
069_08	8	13
081_08	8	7
089_08	8	8
099_08	8	9
115_08	8	9
117_08	8	13
120_08	8	8
121_08	8	8
135_08	8	15

071_14	14	12
072_14	14	15
085_14	14	14
096_14	14	15
104_14	14	16
106_14	14	14
123_14	14	10
130_14	14	14
133_14	14	16
134_14	14	13
135_14	14	15
136_14	14	15
141_14	14	13
147_14	14	16
151_14	14	11
158_14	14	14
159_14	14	6
166_14	14	13
177_14	14	17
181_14	14	12
184_14	14	15
194_14	14	17
197_14	14	14
203_14	14	16
205_14	14	17
210_14	14	17
211_14	14	15
212_14	14	15

034_19	19	18
042_19	19	18
048_19	19	12
049_19	19	17
064_19	19	7
068_19	19	15
072_19	19	17
075_19	19	17
082_19	19	17
085_19	19	15
089_19	19	11
093_19	19	14
096_19	19	13
097_19	19	14
099_19	19	13
100_19	19	13
103_19	19	13
125_19	19	16
130_19	19	17
136_19	19	17
144_19	19	15
150_19	19	14
154_19	19	15
162_19	19	17
167_19	19	12
170_19	19	15
171_19	19	11
173_19	19	16



093_03	3	2
094_03	3	2
095_03	3	2
099_03	3	3
114_03	3	3
125_03	3	6
133_03	3	7
136_03	3	4
140_03	3	6
144_03	3	2
147_03	3	2
150_03	3	6
151_03	3	6
152_03	3	5
154_03	3	13
158_03	3	5
165_03	3	5
166_03	3	2
169_03	3	9
170_03	3	7
200_03	3	2
203_03	3	15
212_03	3	5
213_03	3	9
229_03	3	6
236_03	3	4
240_03	3	5
244_03	3	5

139_08	8	7
144_08	8	15
153_08	8	10
156_08	8	7
160_08	8	12
174_08	8	15
177_08	8	11
178_08	8	12
189_08	8	13
205_08	8	14
212_08	8	12
222_08	8	14
227_08	8	10
243_08	8	7
004_09	9	10
005_09	9	15
006_09	9	11
013_09	9	13
018_09	9	10
023_09	9	11
025_09	9	9
026_09	9	15
031_09	9	11
036_09	9	9
038_09	9	9
043_09	9	12
044_09	9	11
048_09	9	13

213_14	14	17
218_14	14	12
219_14	14	14
224_14	14	7
019_15	15	14
023_15	15	14
024_15	15	13
028_15	15	15
044_15	15	10
048_15	15	17
053_15	15	10
054_15	15	15
058_15	15	16
062_15	15	2
063_15	15	16
064_15	15	10
066_15	15	17
073_15	15	15
090_15	15	16
092_15	15	15
093_15	15	13
095_15	15	15
099_15	15	13
129_15	15	15
131_15	15	10
132_15	15	15
138_15	15	18
152_15	15	11

181_19	19	10
188_19	19	17
194_19	19	13
210_19	19	15
214_19	19	13
223_19	19	16
225_19	19	11
234_19	19	11
239_19	19	14
248_19	19	14
250_19	19	8
003_20	20	17
004_20	20	17
011_20	20	14
015_20	20	6
023_20	20	14
024_20	20	14
025_20	20	15
028_20	20	18
037_20	20	18
038_20	20	16
040_20	20	14
045_20	20	15
047_20	20	15
048_20	20	15
052_20	20	12
054_20	20	17
056_20	20	16

254_03	3	9
002_04	4	3
004_04	4	12
008_04	4	8
023_04	4	6
035_04	4	4
039_04	4	7
041_04	4	3
044_04	4	9
046_04	4	5
048_04	4	9
052_04	4	9
055_04	4	9
068_04	4	4
114_04	4	2
115_04	4	5
121_04	4	3
126_04	4	9
153_04	4	9
160_04	4	8
161_04	4	5
197_04	4	10
209_04	4	2
219_04	4	8
230_04	4	5
238_04	4	9
005_05	5	13
010_05	5	12

049_09	9	13
078_09	9	14
086_09	9	11
131_09	9	8
141_09	9	10
144_09	9	12
150_09	9	16
151_09	9	12
158_09	9	11
159_09	9	9
171_09	9	12
173_09	9	9
177_09	9	10
178_09	9	10
181_09	9	8
182_09	9	8
188_09	9	12
202_09	9	10
209_09	9	11
211_09	9	8
218_09	9	3
219_09	9	13
226_09	9	11
234_09	9	11
245_09	9	9
246_09	9	8
247_09	9	15
248_09	9	11

153_15	15	11
155_15	15	12
162_15	15	14
164_15	15	13
168_15	15	10
169_15	15	15
180_15	15	13
185_15	15	12
188_15	15	14
200_15	15	16
208_15	15	17
209_15	15	12
228_15	15	12
236_15	15	17
238_15	15	17
241_15	15	11
243_15	15	11
245_15	15	17
251_15	15	13
003_16	16	13
004_16	16	17
005_16	16	17
006_16	16	15
013_16	16	16
015_16	16	9
016_16	16	13
017_16	16	14
018_16	16	14

065_20	20	10
067_20	20	14
069_20	20	15
077_20	20	11
083_20	20	15
087_20	20	16
090_20	20	16
092_20	20	17
094_20	20	17
095_20	20	14
099_20	20	17
105_20	20	16
122_20	20	15
123_20	20	12
135_20	20	16
137_20	20	16
144_20	20	14
145_20	20	11
147_20	20	16
149_20	20	18
151_20	20	14
152_20	20	10
163_20	20	16
164_20	20	13
169_20	20	14
178_20	20	16
180_20	20	11
183_20	20	16

011_05	5	7
018_05	5	7
023_05	5	10
025_05	5	10
028_05	5	13
032_05	5	12
036_05	5	4
042_05	5	9
048_05	5	9
049_05	5	13
052_05	5	3
059_05	5	13
064_05	5	7
067_05	5	12
074_05	5	11
077_05	5	6
080_05	5	4
086_05	5	4
113_05	5	10
118_05	5	12
122_05	5	8
123_05	5	2
124_05	5	13
125_05	5	9
129_05	5	8
130_05	5	10
133_05	5	5

249_09	9	5
001_10	10	13
009_10	10	11
017_10	10	10
019_10	10	4
021_10	10	12
028_10	10	15
034_10	10	11
038_10	10	11
049_10	10	15
054_10	10	16
058_10	10	11
059_10	10	13
063_10	10	17
064_10	10	6
066_10	10	14
067_10	10	15
070_10	10	8
077_10	10	4
079_10	10	9
084_10	10	16
094_10	10	11
113_10	10	10
116_10	10	12
125_10	10	14
129_10	10	11
133_10	10	15

021_16	16	13
025_16	16	8
026_16	16	12
027_16	16	18
030_16	16	11
034_16	16	15
037_16	16	17
045_16	16	10
052_16	16	15
068_16	16	13
069_16	16	13
076_16	16	17
077_16	16	13
082_16	16	17
083_16	16	14
101_16	16	17
115_16	16	17
116_16	16	17
118_16	16	15
124_16	16	17
125_16	16	18
126_16	16	8
130_16	16	16
137_16	16	17
139_16	16	12
140_16	16	14
143_16	16	18

189_20	20	15
190_20	20	14
201_20	20	17
205_20	20	17
208_20	20	17
209_20	20	16
215_20	20	16
216_20	20	14
220_20	20	11
230_20	20	13
232_20	20	16
238_20	20	17
240_20	20	17
241_20	20	11
242_20	20	13
243_20	20	14
244_20	20	15
247_20	20	17
252_20	20	16
253_20	20	14
197_21	21	14
028_22	22	16
086_22	22	15
195_22	22	14
004_25	25	15
182_25	25	16



## **Curriculum Vitae**

Petra Grd was born on February 14th 1986 in Kutina. She finished elementary and high school in Kutina and graduated from the Faculty of Organization and Informatics in 2009, where she finished her PhD in 2015. Since 2009 she has been working at the Faculty of organization and informatics as a research assistant on the project "Methods of evaluation of biometric characteristics" and as a teaching assistant at for the courses "Selected Topics in Biometrics" and "State and Administrative Information Systems" at the undergraduate level, "Internet Security" on graduate level, and "Business use of biometric technology" and "Business information systems of state administration". Her research interests are related to biometrics, specifically face biometrics and facial aging. Other than research and teaching, she was the secretary of the Disciplinary Tribunal and the Association of associates, a member of various committees, and a member of the Student council. She has published several scientific papers and participated in conferences and summer schools at home and abroad.

# List of Publications

## Book chapters

1. Grd, Petra; Bača, Miroslav: ebXML in Practice: A Systematic Literature Review // *Frontiers in ICT: Towards Web 3.0* / Levnajič, Zoran (ur.). Frankfurt: Peter Lang International Academic Publishers, 2014. pp. 53-66.
2. Bača, Miroslav; Grd, Petra; Fotak, Tomislav: Basic Principles and Trends in Hand Geometry and Hand Shape Biometrics // *New trends and developments in biometrics* / Yang, Jucheng; Xie, Shan Juan (ur.). Rijeka: InTech, 2012. pp. 77-99.
3. Schatten, Markus; Bača, Miroslav; Koruga, Petra: The transportation paths routing semantic description // *Transactions on transport systems telematics & safety* / Piecha, Jan; Wegrzyn, Tomasz (ur.). Gliwice: Silesian University of Technology, 2011. pp. 11-19.

## Scientific papers in CC journals

1. Ševa, Jurica; Schatten, Markus; Grd, Petra: Open Directory Project based universal taxonomy for Personalization of Online (Re)sources. // *Expert systems with applications*. 42 (2015), 17–18; 6306-6314 (članak, znanstveni). priložen text radaURL link to work

## Scientific papers in journals

1. Schatten, Markus; Grd, Petra; Konecki, Mladen; Kudelić, Robert: Towards a Formal Conceptualization of Organizational Design Techniques for Large Scale Multi Agent Systems. // *Procedia Technology*. 15 (2014); pp. 577-586
2. Grd, Petra: Introduction to Human Age Estimation Using Face Images. // *Research papers Faculty of Materials Science and Technology Slovak University of Technology in Trnava. Special Number* (2013); pp. 35-41
3. Fotak, Tomislav; Bača, Miroslav; Koruga, Petra: Handwritten signature identification using basic concepts of graph theory. // *WSEAS Transactions on Signal Processing*. 7 (2011); pp. 117-129

### Scientific papers in conference proceedings

1. Bača, Miroslav; Fotak, Tomislav; Grd, Petra: Handwritten signature authentication using statistical measure of basic on-line signature characteristics // International Conference on Information Technologies and Information Society / Zoran Levnajić (ur.). Novo Mesto: FIS, 20. pp. 47-52
2. Delić, Alen; Grd, Petra; Gregurec, Iva: Analysis of Communication of Croatian Faculties through Facebook - Part I // Proceedings of the ITI 2013 35th International Conference on Information Technology Interfaces / Luzar-Stiffler, Vesna; Jarec, Iva (ur.). Zagreb, 2013. pp. 43-48
3. Bača, Miroslav; Koruga, Petra; Fotak, Tomislav: Building a framework for the development of biometric forensics // MIPRO 2012 Proceedings / Biljanović, Petar (ur.). Rijeka: Croatian Society for Information and Communication Technology, Electronics and Microelectronics, 2012. pp. 1904-1906
4. Fotak, Tomislav; Grd, Petra; Bača Miroslav: Trends in Hand Geometry Biometrics // Central European Conference on Information and Intelligent Systems 23rd International Conference / Hunjak, Tihomir ; Lovrenčić Sandra ; Tomičić Igor (ur.). Varaždin: Faculty of organization and informatics, 2012. pp. 319-324
5. Gregurec, Iva; Grd, Petra: Search Engine Optimization (SEO): Website analysis of selected faculties in Croatia // Central European Conference on Information and Intelligent Systems 23rd International Conference / Hunjak, Tihomir ; Lovrenčić Sandra ; Tomičić Igor (ur.). Varaždin: Faculty of organization and informatics, 2012. pp. 211-218
6. Koruga, Petra; Bača, Miroslav: Communication of political parties on Twitter: Comparison of political parties in Serbia, Croatia, Slovenia and BiH // 2012 SYMORG Inovative management and business performance / Jakšić, Maja Levi; Barjaktarović Rakočević, Slađana (ur.). Beograd: Faculty of Organizational Sciences, 2012. pp. 408-416
7. Koruga, Petra; Bača, Miroslav; Fotak, Tomislav: Knowledge Visualization in Biometric Face Recognition on Two-dimensional Images // Proceedings of the ITI 2012 34th International Conference on Information Technology Interfaces / Luzar-Stiffler, Vesna; Jarec, Iva; Bekic, Zoran (ur.). Zagreb, 2012. pp. 349-353

8. Bača, Miroslav; Koruga, Petra; Fotak, Tomislav: Basic on-line handwritten signature features for personal biometric authentication // 34th international convention on information and communication technology, electronics and microelectronics / Čišić Dragan ; Hutinski Željko ; Baranović Mirta ; Mauher Mladen ; Ordanić Lea (ur.). Opatija: MIPRO, 2011. pp. 116-121
9. Fotak, Tomislav; Koruga, Petra; Bača, Miroslav: On-line Handwritten Signature Identification: The Basics // Proceedings of the 22nd Central European Conference on Information and Intelligent Systems / Hunjak, Tihomir; Lovrenčić, Sandra (ur.). Varaždin, 2011. pp. 139-145
10. Koruga, Petra; Bača, Miroslav; Fotak, Tomislav: Comparison of Communication of Political Parties over the Internet in Slovenia and Croatia // Proceedings of International Conference on Information Society / Mertik, Matej (ur.). Novo Mesto: Faculty of Information Studies, 2011. pp. 31-36
11. Koruga, Petra; Bača, Miroslav; Schatten, Markus: Analysis of Craniofacial Morphology Changes during Aging and their Connection with Facial Age Estimation // Proceedings of the ITI 2011 33rd International Conference on INFORMATION TECHNOLOGY INTERFACES / Luzar-Stiffler, Vesna; Jarec, Iva; Bekic, Zoran (ur.). Zagreb, 2011. pp. 481-485
12. Koruga, Petra; Ševa, Jurica; Bača Miroslav: Application of Modified Anthropometric Model in Facial Age Estimation // Proceedings of the 53rd International Symposium ELMAR-2011 / Božek, Jelena; Grgić, Mislav (ur.). Zadar: Croatian Society Electronics in Marine, 2011. pp. 17-20
13. Koruga, Petra; Ševa, Jurica; Bača, Miroslav: A Review of Face Recognition Algorithms and Their Application in Age Estimation // Proceedings of the 22nd Central European Conference on Information and Intelligent Systems / Hunjak, Tihomir; Lovrenčić, Sandra (ur.). Varaždin: FOI, 2011. pp. 127-132
14. Koruga, Petra; Bača, Miroslav: Analysis of B-tree data structure and its usage in computer forensics // Proceedings of the 21st Central European Conference on Information and Intelligent Systems / Aurer, Boris; Bača, Miroslav; Schatten, Markus (ur.). Varaždin: Fakultet Organizacije i Informatike, 2010. pp. 423-428